

Terms and conditions of sale and delivery.

1. Pricing:

All our declared prices are based on the current cost situation, exclusive of packaging, which we calculate as inexpensively as possible and which may not be returned to us. We reserve the right to increase prices to their level on the day of delivery, should material prices, wage or other costs increase significantly during the time between confirmation of order and delivery. Arrangements arrived at personally with Fulterer's Customer Field Service shall not be effective unless the order has been confirmed by us in writing. In cases of dispute on the fairness of our prices, the Purchaser shall not be entitled to withhold required payments.

2. Delivery Times:

All delivery times stated by us in quotes, confirmations, etc. are given according to the best of our estimations; however, they are merely to be regarded as approximate and shall not be binding upon us in any way. Term of delivery shall commence as of the date of confirmation of order and shall be complied with to the extent possible; however, in case of delays, the Orderer shall not have the right to withdraw from the Contract or to claim compensation for damages. We shall be entitled to effect part shipments.

3. Extra and Short Shipment:

We shall be entitled to effect extra and short shipments of up to 5% either way. Deviations of up to 10% shall be permissible in cases of special product designs requiring separate materials purchasing.

4. Claims of Defects:

Claims of defects shall not be recognized unless they are submitted in writing within a period of eight days following receipt of the goods, and if the latter are in the same condition in which they were shipped. Claims of defects shall be handled either by repair and improvement, through replacement delivery or withdrawal from the order. Deliveries to third parties must be checked for correctness before passing them along. We expressly decline any and all other claims, such as compensation for damage, penalties for delayed delivery, freight, wages and costs of subsequent processing carried out without our express agreement.

5. Terms and conditions of payment:

Our invoices are payable within a period of 10 days as of the date shown thereon with a discount of 2%, or within a period of 30 days net, unless otherwise agreed upon. Non-compliance with our terms and conditions of payment shall release us from our shipping obligations, but shall not relieve the Purchaser from his acceptance obligation. Should the deadline for payment be exceeded, default interest in the amount of 2% above the normal bank rate shall be charged for the time the accrual date to the day of receipt of Payment, whereby we reserve the right to assert further entitlements.

6. Should the Purchaser's financial situation decline during the term of the Contract, or should we receive information on him which we deem to be insufficient, or should payment of specific items due not be effected in accordance with the Terms and Conditions, our purchase-money claim shall become due forthwith, even in the case of deferral. Furthermore, we shall be entitled to demand collateral or to withdraw from the contract.

7. Retention of ownership:

All goods delivered shall remain our property until payment of all our outstanding accounts has been effected, irrespective of legal basis. Should we assert retention of ownership, this shall not constitute withdrawal from the Contract. In the event that the Orderer combines or processes our conditional commodities to form a new corporeal thing, the Orderer shall assign pro rata co-ownership to us already as at the present time, and the Orderer's debt claims to his recipient of the commodities. Should our conditional commodity and/or the new corporeal thing pertaining thereto be attached or sized, we and the third party concerned must be informed immediately of our retention of ownership.

8. Goods are shipped at the Orderer's risk, including prepaid deliveries. Choice of shipping route and transport shall be subject to our discretion, with no responsibility assumed for eventual cheaper modes of shipping, unless the Order contains clear and specific instruction for such shipping.

9. All offers shall remain subject to change without notice. By assigning an order to us, each Purchaser shall acknowledge our terms and conditions of sale and delivery as legally binding on him.

10. Place of Performance:

Lustenau shall be the place of performance of delivery and payment. Dornbirn shall be the place of jurisdiction for all demands to which we are entitled in accordance with the terms of delivery set out above.

11. Our Clients' Terms and Conditions of Purchase:

Our clients' terms and conditions of purchase which are in contradiction to the terms and conditions set out above, are not acknowledged and shall be precluded. Already as at the present time, objection is raised to such terms and conditions. This objection shall also apply should no special refusal on our part be asserted following receipt of terms and conditions providing otherwise.

The load capacity indicated for each type is valid up to a length of 600 mm. For any length over 600 mm please consider that the load capacity is approximately 20% less. Important: For the indicated load capacity it is absolutely necessary to use all screw holes. We reserve the right to change technical specifications without further notice!

FR 1020

SLIDE TYPE:	Regular-Extension Drawer Slide
MOUNTING:	Side Mount

WIDTH:	12 mm
LOAD CAPACITY:	dynamic up to 30 kg





MATERIAL: steel, white powder coated

FEATURES: solid delrin* rollers

- SPECIFICATIONS:**
- ▶ lateral stability provided by specially shaped profiles
 - ▶ integrated side adjustment - clearance adjustable up to 2 mm
 - ▶ double hole system on cabinet profile for offset attachment to thin inside walls
 - ▶ added strength of cabinet profile provided by special front flange
 - ▶ oblong holes in the cabinet profile permit easy height adjustments
 - ▶ dual detent in the drawer profile holds the drawer in place when extended
 - ▶ single-sided captive profile (left)

*DuPont (TM) Delrin®

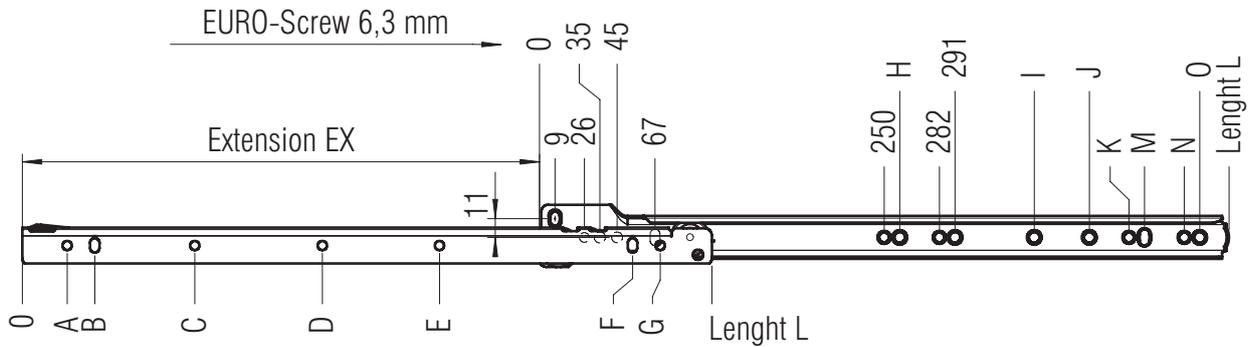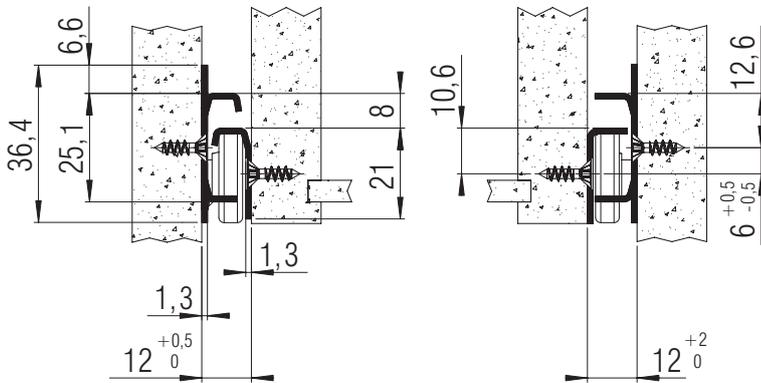

screw holes for 3,5 mm spax screws / 6,3 mm EURO screws

L mm	EX mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	J mm	K mm	M mm	N mm	O mm	Weight per pair (kg)	Order No. white
300	215	46	62	142			254	270					259			0,49	▶ 3009
350	265	32	48	192			304	320		323			259			0,56	▶ 3010
400	300	50	66	242			354	370	259	355		378	387			0,63	▶ 3011
450	350	36	52	292			404	420	259	387		410	419	442		0,70	▶ 3012
500	400	22	38	150	342		454	470	259	387	419	442	451	474	483	0,78	▶ 3013
550	430	40	56	200	392		504	520	259	483		506	515	538		0,83	▶ 3014
600	480	26	42	250	442		554	570	259			506	515	538	547	0,92	▶ 3015
650	530	44	60	300	492		604	620	259			506	515	538	547	0,99	▶ 3016
700	560	30	46	190	350	542	654	670	259			506	515	538	547	1,06	▶ 3017

Packing Unit: 20 sets per box

▶ prompt delivery

FR 1051 CS

SLIDE TYPE:	Regular-Extension Drawer Slide
MOUNTING:	Side Mount



WIDTH:	15 mm
LOAD CAPACITY:	dynamic up to 40 kg



MATERIAL: stainless steel

FEATURES: delrin*-encased chrome steel ball bearings

- SPECIFICATIONS:**
- ▶ cabinet and drawer profile with screw holes
 - ▶ lateral stability provided by specially shaped profiles
 - ▶ single-sided captive profile (right)
 - ▶ rear backstop
 - ▶ self closing
-
- ① compatible with full-extension drawer slide FR 6010 CS
 - ① on request, also available in a heat-resistant version for -40 to +210 °C

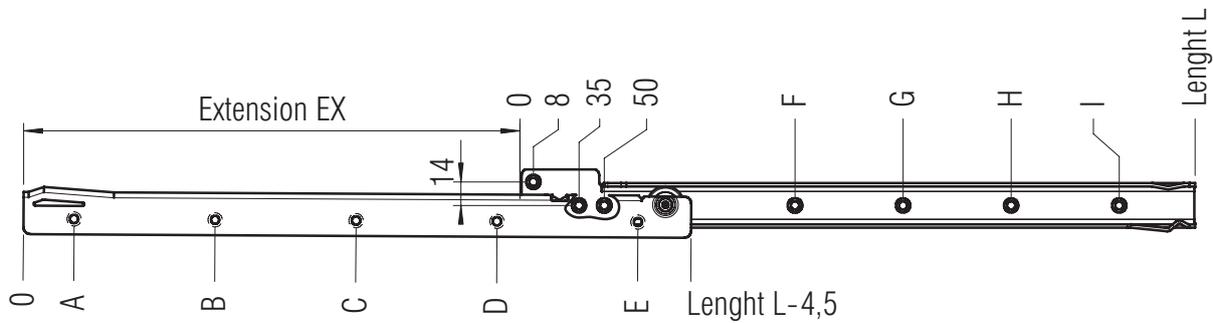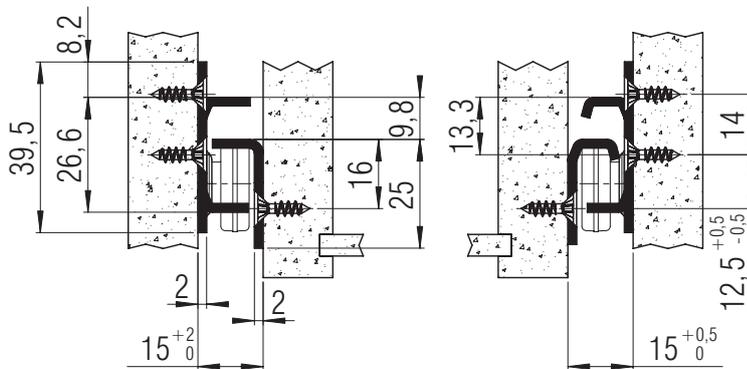

screw holes for 3,5 mm spax screws

L mm	EX mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Weight per pair (kg)	Order No.
400	294	28	156	348			163	355			1,00	▶ 1078
450	344	28	156	348			163	355			1,12	▶ 1079
500	394	28	156	348	444		163	355	451		1,24	▶ 1080
550	424	28	156	348	476		163	355	483		1,36	▶ 1081
600	474	28	156	348	540		195	355	547		1,48	▶ 1082
650	524	28	156	348	540		163	355	547		1,60	▶ 1083
700	574	28	156	380	540	664	163	355	547	643	*	*
750	624	28	156	348	572	714	163	355	547	643	*	*

Packing Unit: 10 sets per box

▶ prompt delivery * on request

FR 1052 CS

SLIDE TYPE:	Regular-Extension Drawer Slide
MOUNTING:	Side Mount



WIDTH:	18 mm
LOAD CAPACITY:	dynamic up to 50 kg



MATERIAL:	stainless steel
------------------	-----------------

FEATURES:	silent rollers
------------------	----------------

SPECIFICATIONS:
▶ cabinet and drawer profile with screw holes
▶ lateral stability provided by specially shaped profiles
▶ single-sided captive profile (right)
▶ rear backstop
▶ self closing
① compatible with full-extension drawer slide FR 790 CS

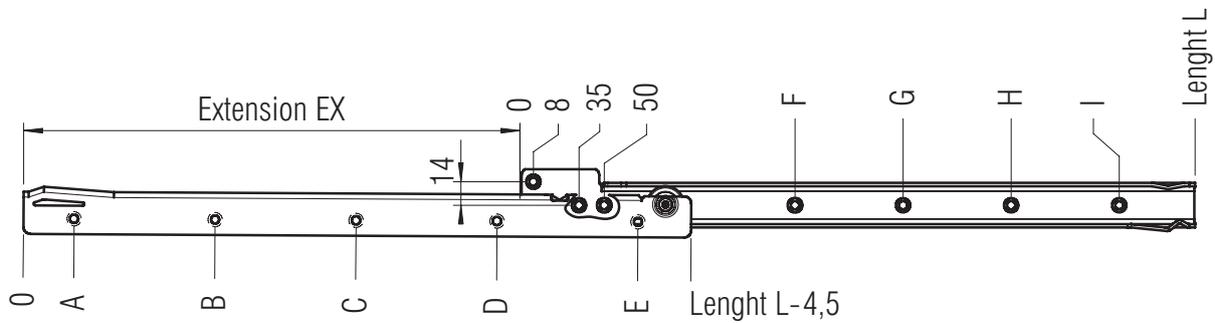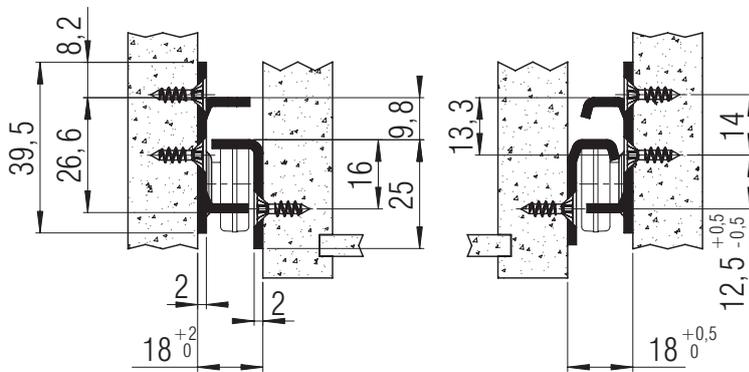

screw holes for 3,5 mm spax screws

L mm	EX mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Weight per pair (kg)	Order No.
400	294	28	156	348			163	355			0,97	▶ 1601
450	344	28	156	348			163	355			1,09	▶ 1602
500	394	28	156	348	444		163	355	451		1,21	▶ 1603
550	424	28	156	348	476		163	355	483		1,33	▶ 1604
600	474	28	156	348	540		195	355	547		1,45	▶ 1605
650	524	28	156	348	540		163	355	547		1,57	▶ 1606
700	574	28	156	380	540	664	163	355	547	643	*	*
750	624	28	156	348	572	714	163	355	547	643	*	*

Packing Unit: 10 sets per box

▶ prompt delivery * on request

FR 1052 CS-S

SLIDE TYPE:	Regular-Extension Drawer Slide
MOUNTING:	Side Mount

WIDTH:	18 mm
LOAD CAPACITY:	dynamic up to 50 kg





MATERIAL: stainless steel

FEATURES: silent rollers

SPECIFICATIONS & NOTES:

- ▶ cabinet profile with bayonet mounting tabs and safety nose
- ▶ drawer profile without screw holes
- ▶ lateral stability provided by specially shaped profiles
- ▶ single-sided captive profile (right)
- ▶ rear backstop
- ▶ self closing

- ① compatible with full-extension drawer slide FR 790 CS-S
- ① tool-less quick assembly of cabinet profile
- ① standard grid rail (see drawing)

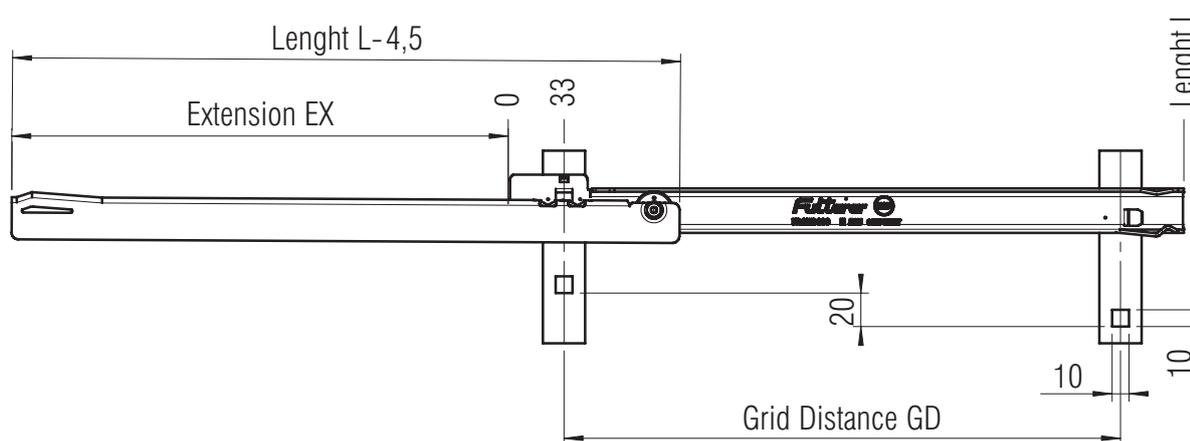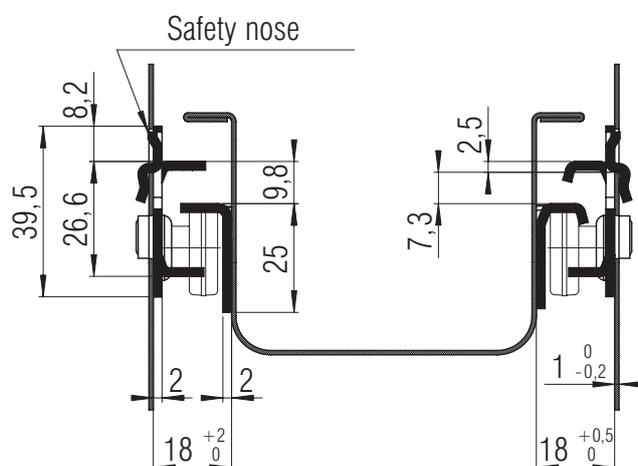

L mm	EX mm	GD mm	Weight per pair (kg)	Order No.
350	244	279,5	*	*
400	294	329,5	*	*
450	344	379,5	*	*
500	394	429,5	*	*
550	424	479,5	*	*
600	474	529,5	*	*
650	524	579,5	*	*
700	574	629,5	*	*
750	624	679,5	*	*


Packing Unit: on request

* on request

FR 1052 CS-SC

SLIDE TYPE:	Regular-Extension Drawer Slide
MOUNTING:	Side Mount



WIDTH:	18 mm
LOAD CAPACITY:	dynamic up to 50 kg

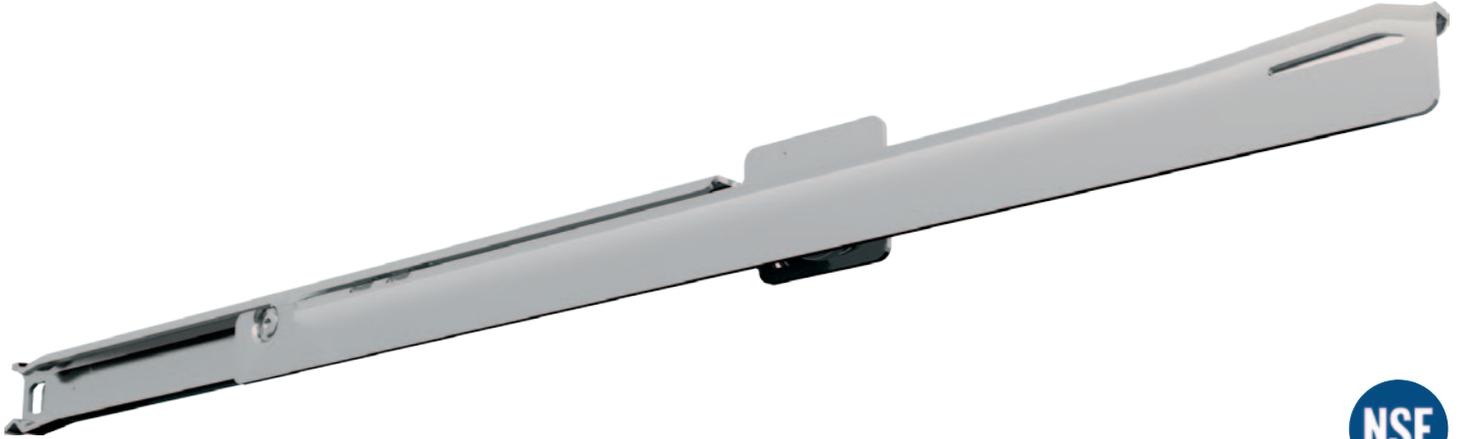

MATERIAL:	stainless steel
------------------	-----------------

FEATURES:	silent rollers
------------------	----------------

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ cabinet profile with bayonet mounting tabs and safety nose ▶ drawer profile without screw holes ▶ lateral stability provided by specially shaped profiles ▶ single-sided captive profile (right) ▶ rear backstop ▶ self closing <hr/> <ul style="list-style-type: none"> ① compatible with full-extension drawer slide FR 785 CS-SC ① tool-less quick assembly of cabinet profile ① standard grid rail (see drawing)

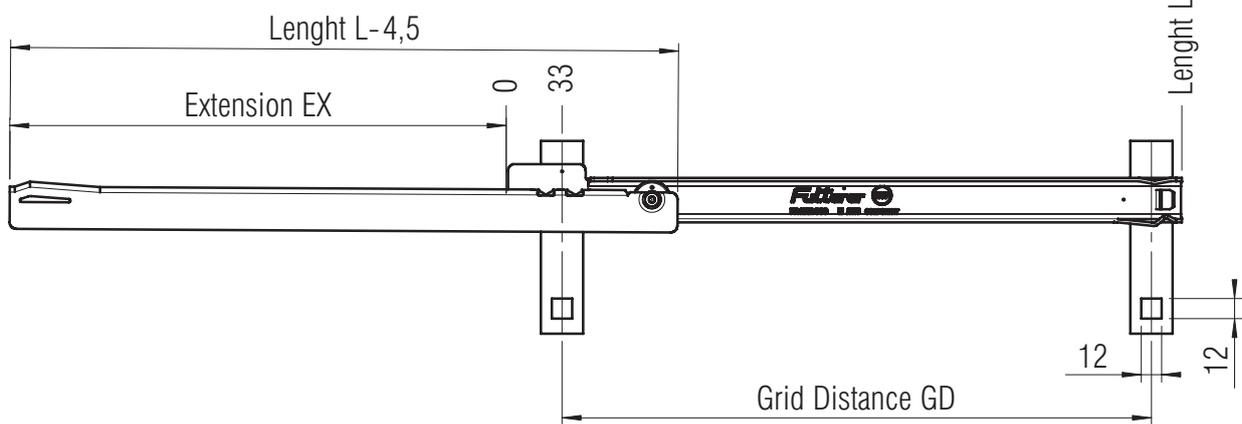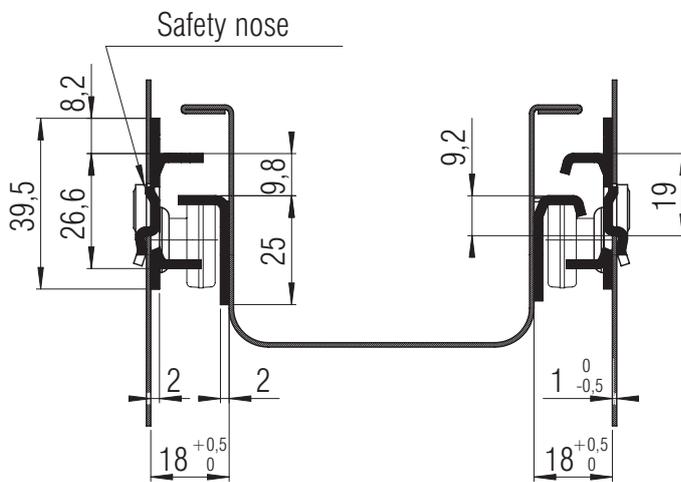

L mm	EX mm	GD mm	Weight per pair (kg)	Order No.
400	294	349	0,97	▶ 5302
450	344	399	1,09	▶ 5303
500	394	449	1,21	▶ 5304
550	424	499	1,33	▶ 5305
600	474	549	1,45	▶ 5306
650	524	599	1,57	▶ 5307
700	574	649	1,69	▶ 5308
750	624	699	1,82	▶ 5309

Packing Unit: 15 sets per box

▶ prompt delivery

FR 1052 SCC-SC

SLIDE TYPE:	Regular-Extension Drawer Slide
MOUNTING:	Side Mount



WIDTH:	18 mm
LOAD CAPACITY:	dynamic up to 50 kg



MATERIAL:	stainless steel, cabinet profile galvanized
------------------	---

FEATURES:	silent rollers
------------------	----------------

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ cabinet profile with bayonet mounting tabs and safety nose ▶ drawer profile without screw holes ▶ lateral stability provided by specially shaped profiles ▶ single-sided captive profile (right) ▶ rear backstop ▶ self closing <hr/> <ul style="list-style-type: none"> ① compatible with full-extension drawer slide FR 785 CS-SC ① tool-less quick assembly of cabinet profile ① standard grid rail (see drawing) ① drawer profile made from stainless steel, cabinet profile galvanized

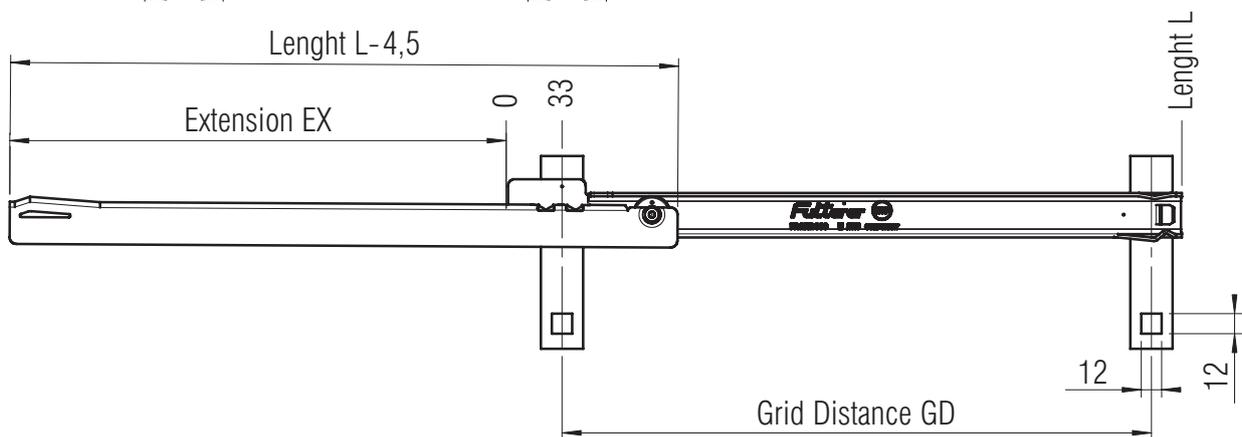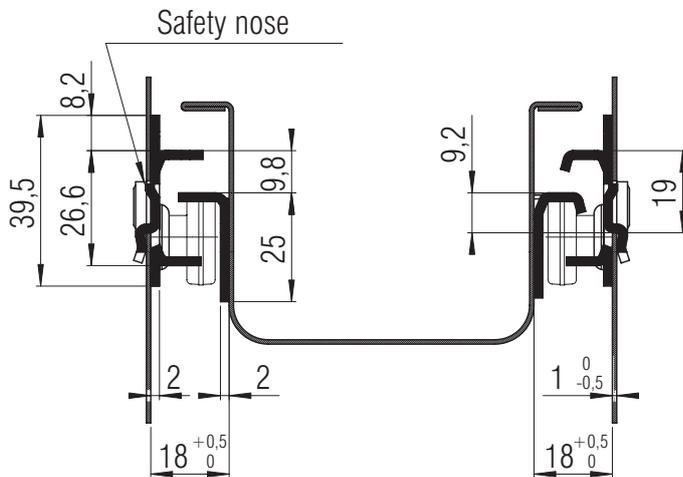

L mm	EX mm	GD mm	Weight per pair (kg)	Order No.
400	294	349	0,97	▶ 5312
450	344	399	1,09	▶ 5313
500	394	449	1,21	▶ 5314
550	424	499	1,33	▶ 5315
600	474	549	1,45	▶ 5316
650	524	599	1,57	▶ 5317
700	574	649	1,69	▶ 5318
750	624	699	1,82	▶ 5319

Packing Unit: 15 sets per box

▶ prompt delivery

FR 2021

SLIDE TYPE:	Regular-Extension Drawer Slide
MOUNTING:	Bottom Mount



WIDTH:	12 mm
LOAD CAPACITY:	dynamic up to 35 kg



MATERIAL:	steel, white powder coated
------------------	----------------------------

FEATURES:	solid delrin* rollers
------------------	-----------------------

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ lateral stability provided by specially shaped profiles ▶ integrated side adjustment - clearance adjustable up to 2 mm ▶ double hole system on cabinet profile for offset attachment to thin inside walls ▶ added strength of cabinet profile provided by special front flange ▶ oblong holes in the cabinet profile permit easy height adjustments ▶ dual detent in the drawer profile holds the drawer in place when extended ▶ single-sided captive profile (left) ▶ self-closing
<p>① compatible with full-extension drawer slide FR 6500 in the 32 mm system</p>

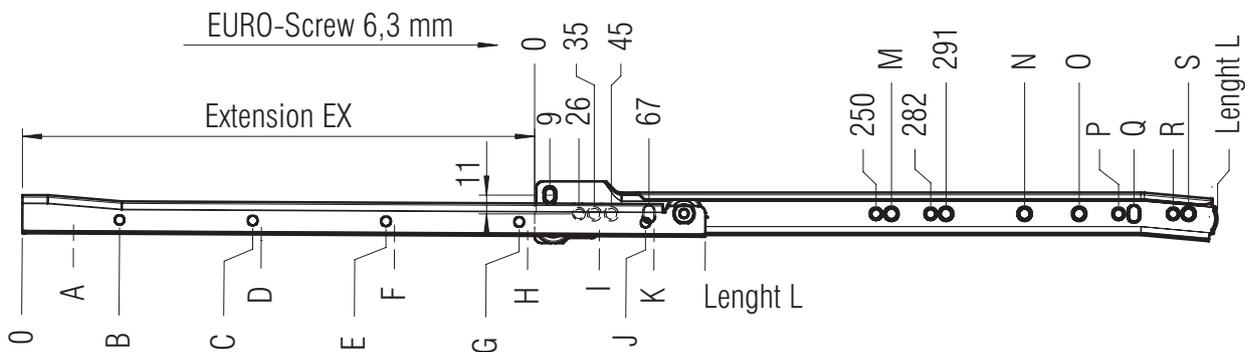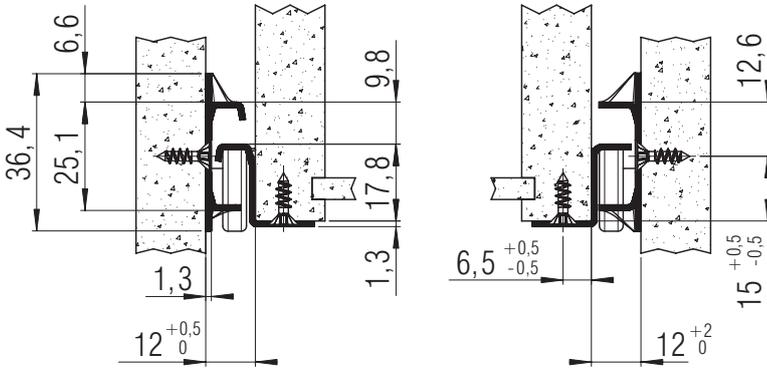

screw holes for 3,5 mm spax screws / 6,3 mm EURO screws

L	EX	A	B	C	D	E	F	G	H	I	J	K	M	N	O	P	Q	R	S	Weight	Order No.
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	per pair (kg)	white
300	215	46	73	137	142					238	265	270					259			0,55	▶ 7065
350	265	32	91	187	192					288	315	320		323			259			0,63	▶ 7066
400	300	18	77	173		237	242			338	365	370	259	355		378	387			0,71	▶ 7067
450	350	36	95	159		287	292			388	415	420	259	387		410	419	442		0,79	▶ 7068
500	400	22	81	113	118	337	342			438	465	470	259	387	419	442	451	474	483	0,87	▶ 7069
550	430	40	99	163	168	387	392			488	515	520	259	483		506	515	538		0,96	▶ 7070
600	480	26	85	213	218	437	442			538	565	570	259			506	515	538	547	1,04	▶ 7071
650	530	44	71	135		263	268	487	492	588	615	620	259			506	515	538	547	1,13	▶ 7072
700	560	30	89	185	190	313	318	537	542	638	665	670	259			506	515	538	547	1,21	▶ 7082

Packing Unit: 20 sets per box

▶ prompt delivery

FR 2022

SLIDE TYPE:	Regular-Extension Drawer Slide
MOUNTING:	Bottom Mount



WIDTH:	12 mm
LOAD CAPACITY:	dynamic up to 30 kg



MATERIAL:	steel, white powder coated
------------------	----------------------------

FEATURES:	silent rollers
------------------	----------------

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ lateral stability provided by specially shaped profiles ▶ double hole system on cabinet profile for offset attachment to thin inside walls ▶ added strength of cabinet profile provided by special front flange ▶ oblong holes in the cabinet profile permit easy height adjustments ▶ dual detent in the drawer profile holds the drawer in place when extended ▶ single-sided captive profile (left) ▶ self-closing
<p>Ⓢ compatible with full-extension drawer slide FR 6500 in the 32 mm system</p>

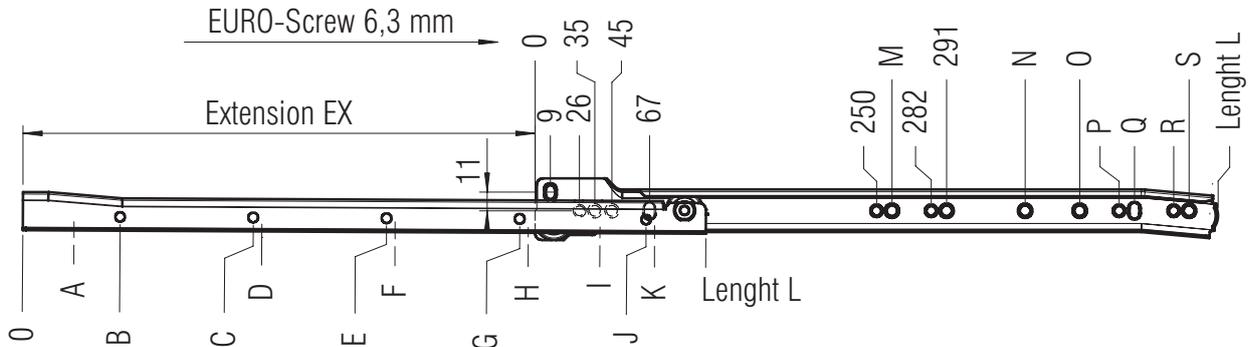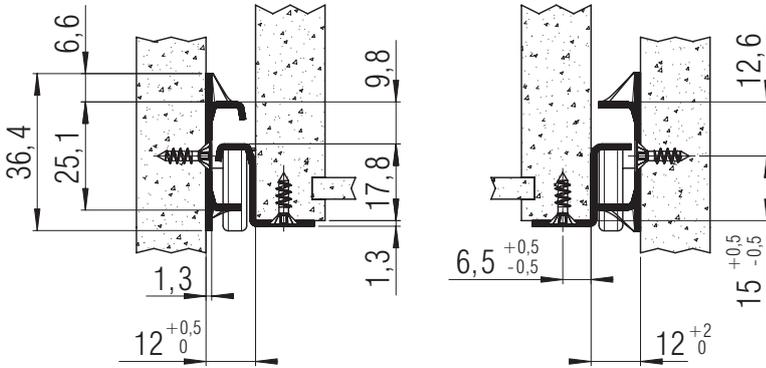

screw holes for 3,5 mm spax screws / 6,3 mm EURO screws

L	EX	A	B	C	D	E	F	G	H	I	J	K	M	N	O	P	Q	R	S	Weight	Order No.
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	per pair (kg)	white
300	215	46	73	137	142					238	265	270					259			0,55	▶ 7085
350	265	32	91	187	192					288	315	320		323			259			0,63	▶ 7086
400	300	18	77	173		237	242			338	365	370	259	355		378	387			0,71	▶ 7087
450	350	36	95	159		287	292			388	415	420	259	387		410	419	442		0,79	▶ 7088
500	400	22	81	113	118	337	342			438	465	470	259	387	419	442	451	474	483	0,87	▶ 7089
550	430	40	99	163	168	387	392			488	515	520	259	483		506	515	538		0,96	▶ 7090
600	480	26	85	213	218	437	442			538	565	570	259			506	515	538	547	1,04	▶ 7091
650	530	44	71	135		263	268	487	492	588	615	620	259			506	515	538	547	1,13	▶ 7092
700	560	30	89	185	190	313	318	537	542	638	665	670	259			506	515	538	547	1,21	▶ 7093

Packing Unit: 20 sets per box

▶ prompt delivery

FR 2026

SLIDE TYPE:	Regular-Extension Drawer Slide
MOUNTING:	Bottom Mount

WIDTH:	12 mm
LOAD CAPACITY:	dynamic up to 40 kg





MATERIAL: steel, white powder coated

FEATURES: delrin* encased chrome steel ball bearings and solid delrin* rollers

- SPECIFICATIONS & NOTES:**
- ▶ lateral stability provided by specially shaped profiles
 - ▶ integrated side adjustment - clearance adjustable up to 2 mm
 - ▶ double hole system on cabinet profile for offset attachment to thin inside walls
 - ▶ added strength of cabinet profile provided by special front flange
 - ▶ oblong holes in the cabinet profile permit easy height adjustments
 - ▶ dual detent in the drawer profile holds the drawer in place when extended
 - ▶ single-sided captive profile (left)
 - ▶ self-closing
- ① compatible with full-extension drawer slide FR 6500 in the 32 mm system

*DuPont (TM) Delrin®

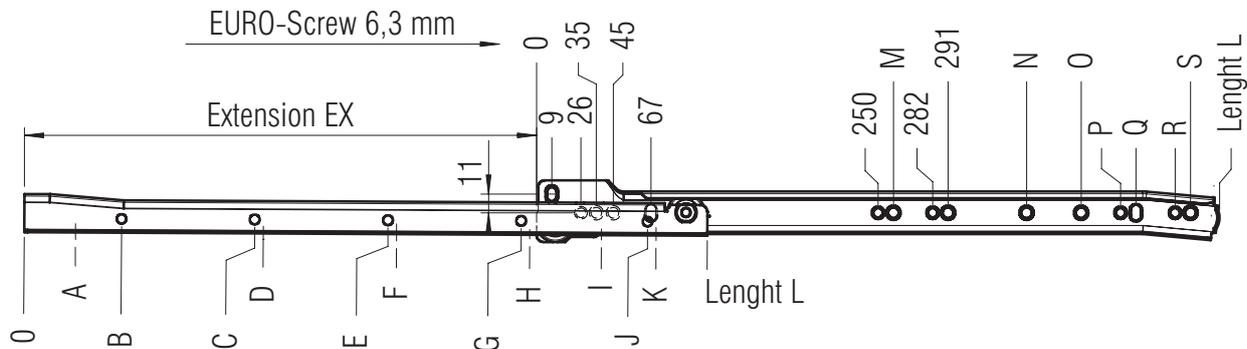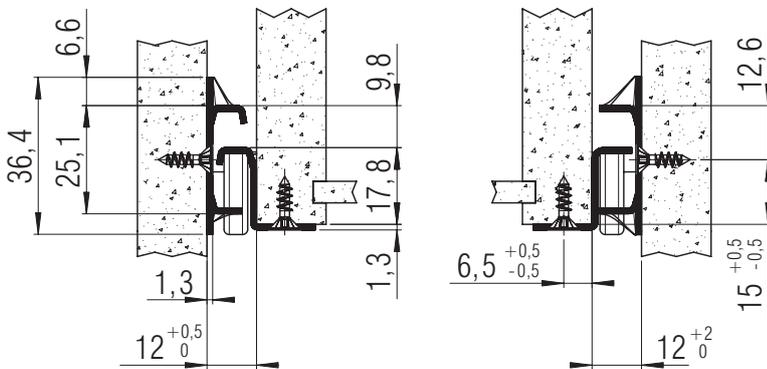

screw holes for 3,5 mm spax screws / 6,3 mm EURO screws

L	EX	A	B	C	D	E	F	G	H	I	J	K	M	N	O	P	Q	R	S	Weight	Order No.
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	per pair (kg)	white
300	215	46	73	137	142					238	265	270					259			0,55	▶ 2101
350	265	32	91	187	192					288	315	320		323			259			0,63	▶ 2102
400	300	18	77	173		237	242			338	365	370	259	355		378	387			0,71	▶ 2103
450	350	36	95	159		287	292			388	415	420	259	387		410	419	442		0,79	▶ 2104
500	400	22	81	113	118	337	342			438	465	470	259	387	419	442	451	474	483	0,87	▶ 2105
550	430	40	99	163	168	387	392			488	515	520	259	483		506	515	538		0,96	▶ 2106
600	480	26	85	213	218	437	442			538	565	570	259			506	515	538	547	1,04	▶ 2107
650	530	44	71	135		263	268	487	492	588	615	620	259			506	515	538	547	1,13	▶ 2108
700	560	30	89	185	190	313	318	537	542	638	665	670	259			506	515	538	547	1,21	▶ 2109

Packing Unit: 20 sets per box

▶ prompt delivery

FR 2051 CS

SLIDE TYPE:	Regular-Extension Drawer slide
MOUNTING:	Bottom Mount



WIDTH:	15 mm
LOAD CAPACITY:	dyn. up to 40 kg (steel ball bearings) dyn. up to 50 kg (silent rollers)



MATERIAL:	stainless steel
------------------	-----------------

FEATURES:	delrin* - encased chrome steel ball bearings or silent rollers
------------------	--

SPECIFICATIONS:
<ul style="list-style-type: none"> ▶ cabinet and drawer profile with screw holes ▶ lateral stability provided by specially shaped profiles ▶ single-sided captive profile (right) ▶ rear backstop ▶ self closing <hr/> <ul style="list-style-type: none"> ① compatible with full-extension drawer slide FR 6010 CS ① on request, also available in a heat resistant version for -40 to +210 °C

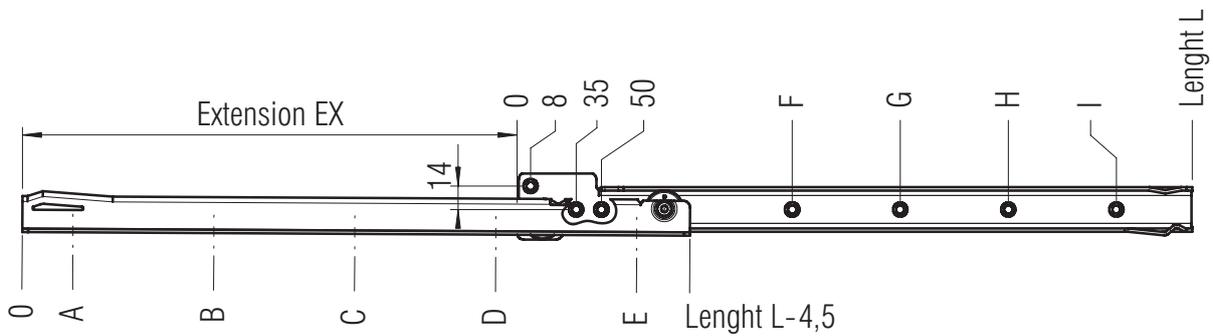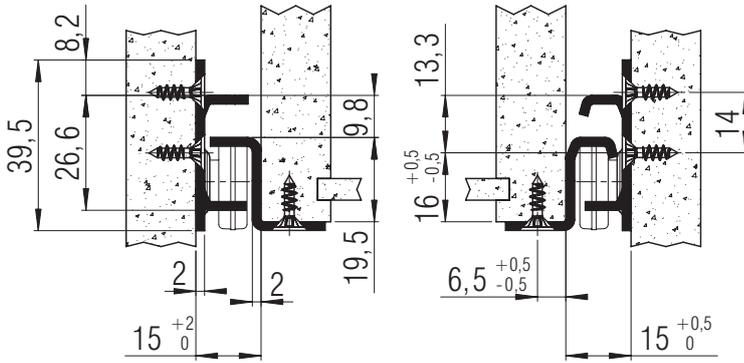

screw holes for 3,5 mm spax screws

L mm	EX mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Weight per pair (kg)	Order No. steel ball bearings	Order No. silent rollers
400	294	28	156	348			163	355			1,13	▶ 1086	▶ 1510
450	344	28	156	348			163	355			1,27	▶ 1087	▶ 1511
500	394	28	156	348	444		163	355	451		1,41	▶ 1088	▶ 1512
550	424	28	156	348	476		163	355	483		1,54	▶ 1089	▶ 1513
600	474	28	156	348	540		195	355	547		1,68	▶ 1090	▶ 1514
650	524	28	156	348	540		163	355	547		1,82	▶ 1091	▶ 1515
700	574	28	156	380	540	664	163	355	547	643	1,95	▶ 1092	▶ 1516
750	624	28	156	348	572	714	163	355	547	643	2,09	▶ 1093	▶ 1517

Packing Unit: **10 sets per box**

▶ prompt delivery

FR 206

SLIDE TYPE:	Regular-Extension Drawer Slide
MOUNTING:	Bottom Mount

WIDTH:	16 mm
LOAD CAPACITY:	dynamic up to 100 kg




MATERIAL:	steel, galvanized or white powder coated
------------------	--

FEATURES:	steel ball bearings or solid delrin* rollers
------------------	--

SPECIFICATIONS:
<ul style="list-style-type: none"> ▶ stay-closed feature holds the drawer in place when closed ▶ dual detent in the drawer profile holds the drawer in place when extended ▶ with holes for 4,5 mm screws ▶ steel rear backstop <hr/> <ul style="list-style-type: none"> ① galvanized - steel ball bearings white powder coated - solid delrin* rollers

*DüPont (TM) Delrin®

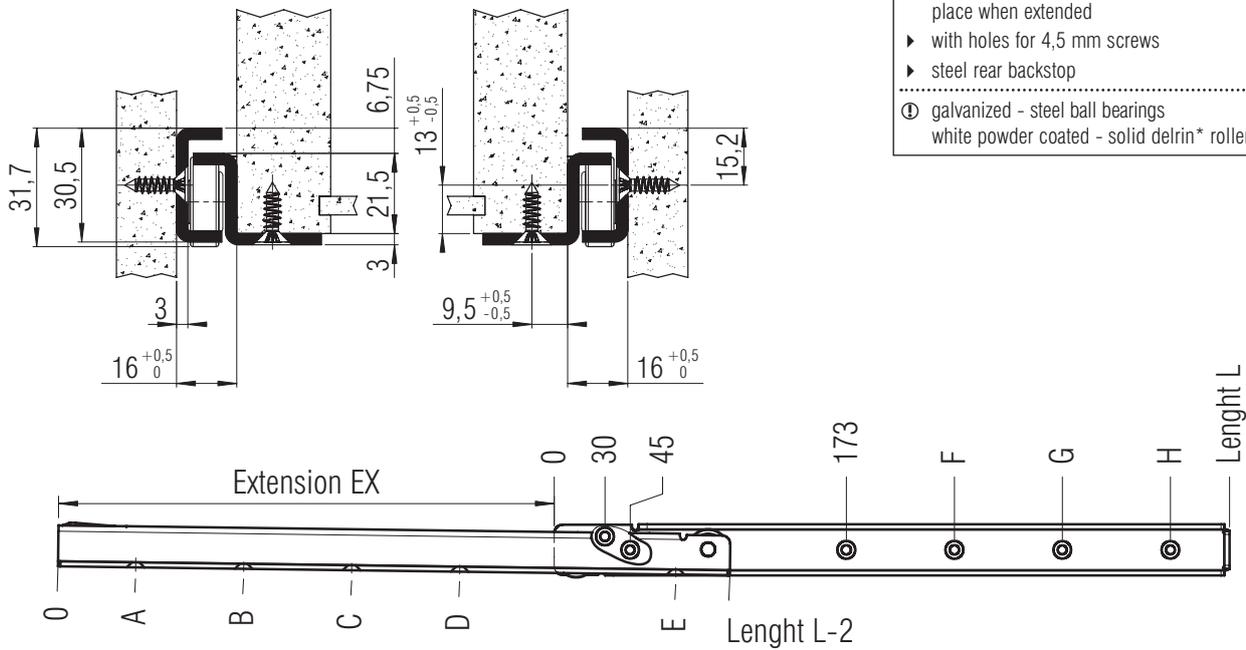

screw holes for 4,5 mm spax screws

L mm	EX mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Weight per pair (kg)	Order No. galvanized	Order No. white
300	209	42	138	266			269			1,48	▶ 4064	*
350	259	60	188	316			301			1,71	▶ 4065	*
400	294	46	238	366			333			1,94	▶ 4066	▶ 4080
450	344	96	288	416			365			2,17	▶ 4067	▶ 4081
500	394	50	146	338	466		365	461		2,40	▶ 4068	▶ 4082
550	444	68	196	388	516		365	493		2,63	▶ 4069	▶ 4083
600	494	54	246	438	566		365	557		2,86	▶ 4070	▶ 4084
650	544	40	296	488	616		365	621		3,09	▶ 4071	▶ 4085
700	564	58	186	346	538	666	365	525	653	3,33	▶ 4072	▶ 4086
750	614	76	204	396	588	716	365	557	685	3,55	▶ 4073	*
800	654	62	190	446	638	766	365	621	749	3,79	▶ 4074	▶ 4087
850	704	80	240	496	688	816	365	621	781	4,04	▶ 4075	*
900	744	66	290	546	738	866	365	621	845	4,27	▶ 4076	▶ 4088
950	794	52	340	596	788	916	365	621	909	4,51	▶ 4077	*
1000	834	70	390	646	838	966	365	621	941	4,74	▶ 4078	▶ 4089

Packing Unit: 300-550 mm 10 sets per box; 600-1000 mm: 7 sets per box

▶ prompt delivery * on request

FR 2070-R

TYPE: Regular-Extension Drawer Slide
Special Design for ceramic tile display

LOAD CAPACITY: dynamic up to **40 kg**



MATERIAL: steel, white powdercoated

FEATURES: solid delrin* rollers



SPECIFICATIONS:

- ▶ cabinet and drawer profile designed with welded frame to drawer profiles
- ▶ cabinet profile with screw holes for 4.5 mm spax screws
- ▶ regular-extension frame unit available in different widths and depths
- ▶ lateral stability provided by double-sided captive profiles
- ▶ solid delrin rollers
- ▶ fields of application: shops and showrooms (displays and store fixtures)



NOTES:

- ▶ FR 2070-R 650 framework in AL90061
Frame welded construction + cabinet profile + handle
installation width **686 mm**
for surface measurement **650 x 650 mm**
- ▶ FR 2070-R 920 framework in AL90061
Frame welded construction + cabinet profile
installation width **956 mm**
for surface measurement **920 x 920 mm**
- ▶ FR 2070-R 1250 framework in AL90061
Frame welded construction + cabinet profile
installation width **1286 mm**
for surface measurement **1250 x 920 mm**
AL9006 = whitealuminium

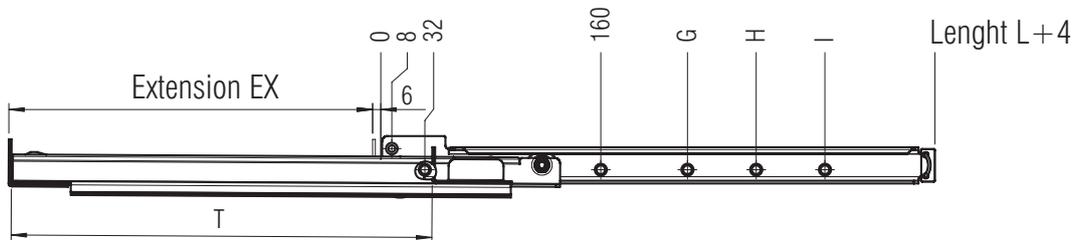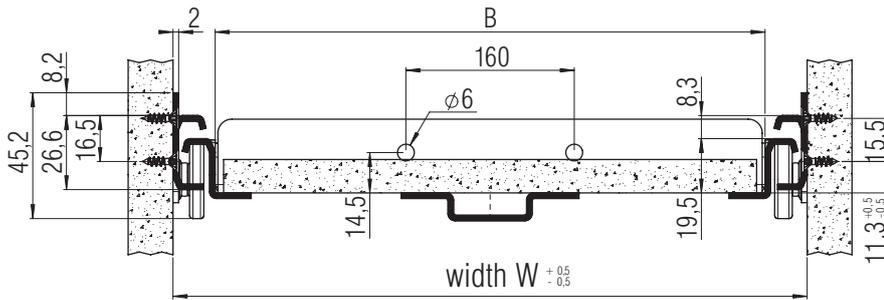

screw holes for 4,5 spax screws

Dimensions mm	W mm	L mm	EX mm	B mm	T mm	G mm	H mm	I mm	Weight	Order No.
650 x 650	686	750	600	656	656	288	544		*	*
920 x 920	956	1000	800	926	926	288	544	768	*	*
1250 x 920	1286	1000	800	1256	926	288	544	768	*	*

Packing Unit (per box): **on request**

*** on request**

FR 2071

SLIDE TYPE:	Regular-Extension Drawer Slide
MOUNTING:	Bottom Mount



WIDTH:	15 mm
LOAD CAPACITY:	dynamic up to 70 kg



MATERIAL:	steel, white powder coated
------------------	----------------------------

FEATURES:	silent rollers
------------------	----------------

SPECIFICATIONS:
▶ lateral stability provided by specially shaped profiles (- length 1000 mm)
▶ cabinet profile with rubber stop
▶ dual detent in the drawer profile holds the drawer in place when extended
▶ the edge of a thick drawer bottom is covered by the tall drawer profile
▶ quiet running provided by precision silent rollers
▶ single-sided captive profile (right)
▶ self-closing

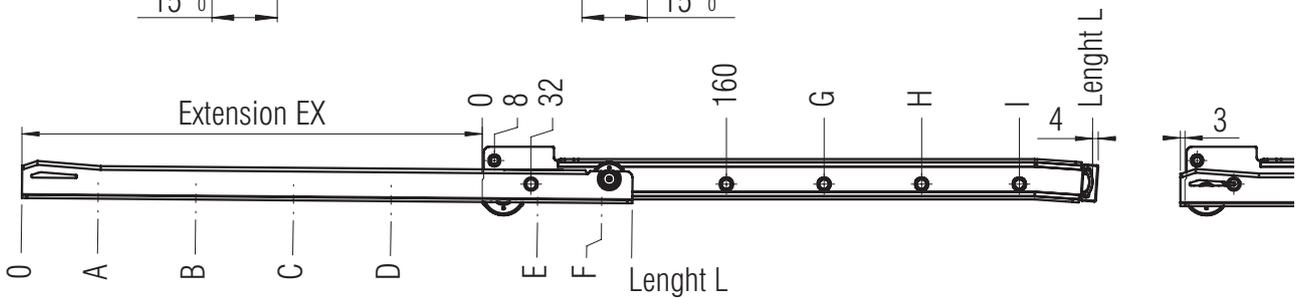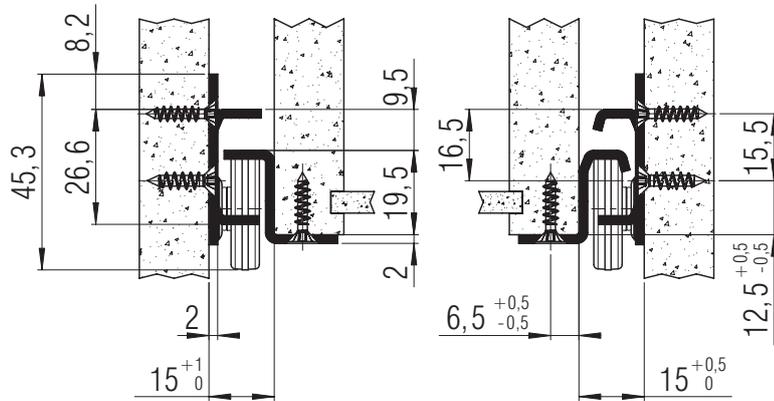

screw holes for 3,5 mm spax screws

L mm	EX mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Weight per pair (kg)	Order No. white
300	212	46	142	238	270			256			0,90	▶ 1349
350	262	32	192	288	320			288			1,04	▶ 1350
400	302	18	242	338	370			288			1,18	▶ 1351
450	352	36	292	388	420			288			1,32	▶ 1352
500	402	22	182	342	438	470		288	448		1,46	▶ 1353
550	432	40	168	392	488	520		288	480		1,60	▶ 1354
600	482	26	218	442	538	570		288	544		1,74	▶ 1355
650	532	44	268	492	588	620		288	544		1,88	▶ 1356
700	582	30	190	318	542	638	670	288	544		2,02	▶ 1357
750	612	16	176	368	592	688	720	288	544		2,17	▶ 1358
800	662	34	226	418	642	738	770	288	544	736	2,33	▶ 1359
850	712	20	276	468	692	788	820	288	544	768	2,47	▶ 1360
900	742	38	230	518	742	838	870	288	544	768	2,61	▶ 1361
950	792	24	280	568	792	888	920	288	544	768	2,76	▶ 1362
1000	842	42	330	618	842	938	970	288	544	768	2,89	▶ 1363

Packing Unit: 10 sets per box

▶ prompt delivery

FR 215

SLIDE TYPE:	Regular-Extension Drawer Slide
MOUNTING:	Bottom Mount




WIDTH:	24 mm
LOAD CAPACITY:	dynamic up to 100 kg



MATERIAL: steel, light grey powder coated

FEATURES: delrin* encased steel ball bearings

- SPECIFICATIONS & NOTES:**
- ▶ specially shaped solid delrin* rollers provide excellent and quiet running even under the heaviest loads
 - ▶ return stop for the fully retracted unit
 - ▶ double-sided captive profile
 - ▶ soft rubber back stop
-
- ① suitable for full-extension units FR 7100 and FR 7180
 - ② also in „conductive“ version available

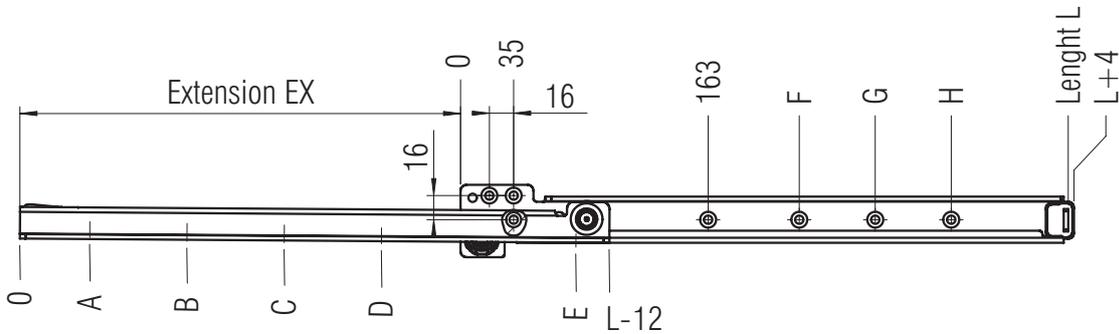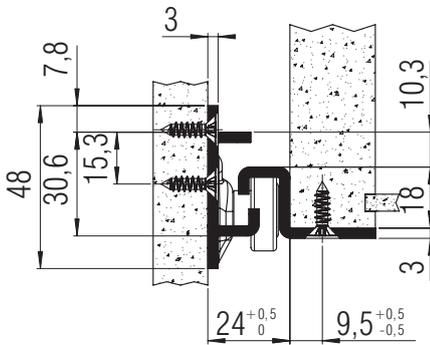

screw holes for 4,5 mm spax screws

L mm	EX mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Weight per pair (kg)	Order No. light grey
400	290	46	238	366			323			*	*
450	340	96	288	416			355			*	*
500	380	50	146	338	466		291	451		2,75	▶ 4182
550	420	68	196	388	516		323	483		3,02	▶ 4183
600	460	54	246	438	566		355	547		3,29	▶ 4184
650	500	40	296	488	616		355	611		3,56	▶ 4185
700	540	58	186	346	538	666	355	515	643	3,83	▶ 4186
750	580	76	204	396	588	716	355	547	675	4,10	▶ 4187
800	620	62	190	446	638	766	355	611	739	4,37	▶ 4188
850	660	80	240	496	688	816	355	611	771	*	*
900	700	66	290	546	738	866	355	611	835	4,91	▶ 4190
950	740	52	340	596	788	916	355	611	899	*	*
1000	780	70	390	646	838	966	355	643	931	5,45	▶ 4192

Packing Unit: 300-750 mm 5 sets per box; 800-1000 mm: 4 sets per box

▶ prompt delivery * on request

FR 215-R

TYPE: Regular-Extension Drawer Slide
Special Design for ceramic tile display

LOAD CAPACITY: dynamic up to **80 kg**



MATERIAL: steel, white powdercoated

FEATURES: solid delrin* rollers

SPECIFICATIONS:



- ▶ cabinet and drawer profile designed with welded frame to drawer profiles
- ▶ cabinet profile with screw holes for 4.5 mm spax screws
- ▶ regular-extension frame unit available in different widths and depths
- ▶ lateral stability provided by double-sided captive profiles
- ▶ solid delrin rollers
- ▶ fields of application: shops and showrooms (displays and store fixtures)

*DuPont (TM) Delrin®



NOTES:

- ▶ FR 215-R 650 framework in AL90061
Frame welded construction + cabinet profile + handle
installation width **703 mm**
for surface measurement **650 x 650 mm**
- ▶ FR 215-R 920 framework in AL90061
Frame welded construction + cabinet profile
installation width **973 mm**
for surface measurement **920 x 920 mm**
- ▶ FR 215-R 1250 framework in AL90061
Frame welded construction + cabinet profile
installation width **1303 mm**
for surface measurement **1250 x 920 mm**
AL9006 = whitealuminium

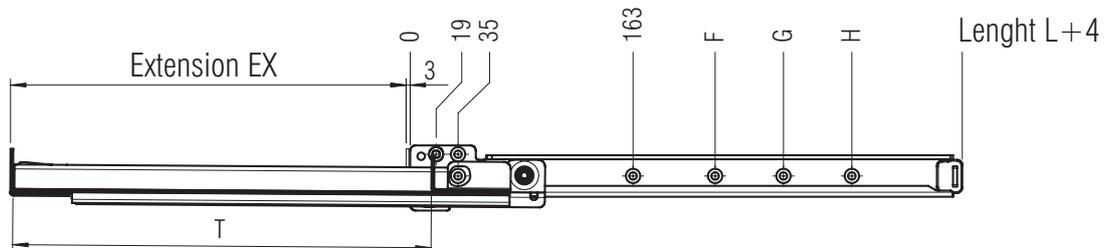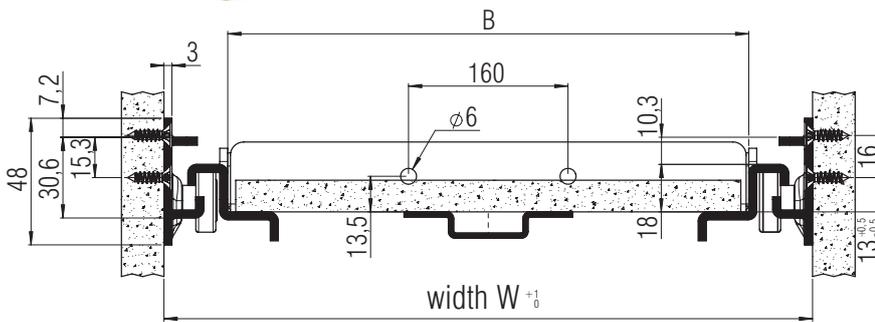

screw holes for 4,5 spax screws

Dimensions mm	W mm	L mm	EX mm	B mm	T mm	F mm	G mm	H mm	Weight	Order No.
650 x 650	703	750	600	656	656	355	547	675	*	*
920 x 920	973	1000	800	926	926	355	643	931	*	*
1250 x 920	1303	1000	800	1256	926	355	643	931	*	*

Packing Unit (per box): **on request**

*** on request**

FR 311

SLIDE TYPE:	Regular-Extension Drawer Slide for shelves and drawers
MOUNTING:	Top Mount

WIDTH:	14 mm
LOAD CAPACITY:	dynamic up to 30 kg



MATERIAL: steel, white powder coated



FEATURES: delrin* encased steel ball bearings and solid delrin* rollers

SPECIFICATIONS & NOTES:

- ▶ Attaches to the underside of a work surface
- ▶ the overrun clip in the cabinet profile prevents the drawer or shelf from accidentally disengaging
- ▶ stop in the cabinet profile

① the ideal drawer runner for adding drawers or shelves to an existing work surface

*DuPont (TM) Delrin®

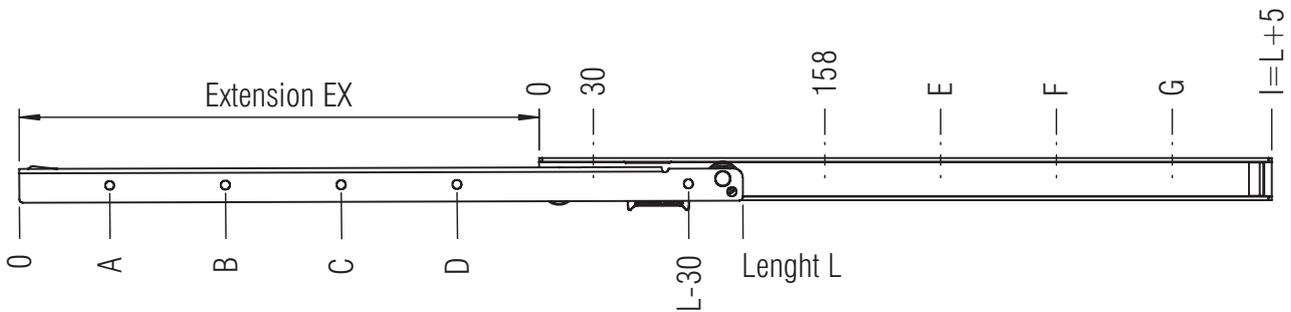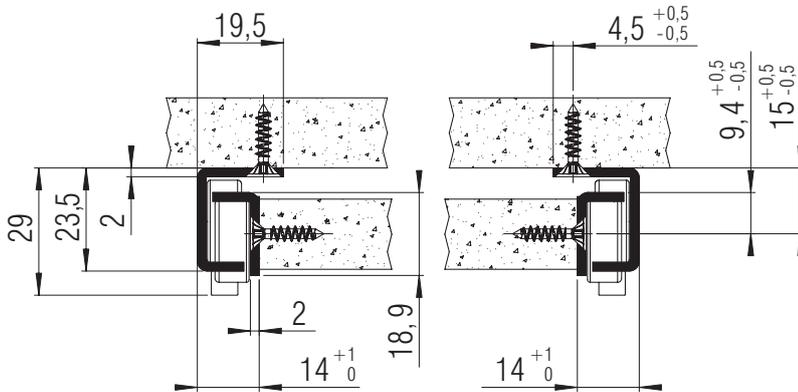

screw holes for 3,5 mm spax screws

L mm	EX mm	A mm	B mm	C mm	D mm	I mm	E mm	F mm	G mm	Weight per pair (kg)	Order No. white
300	192	46	142			305	254			0,76	▶ 3093
350	242	32	192			355	286			0,87	▶ 3094
400	287	50	242			405	350			0,97	▶ 3095
450	337	36	292			455	350			1,10	▶ 3096
500	387	22	150	342		505	350	446		1,22	▶ 3097
550	437	40	200	392		555	350	478		1,34	▶ 3098
600	487	26	250	442		605	350	542		1,45	▶ 3099
650	537	76	300	492		655	350	542		*	*
700	577	30	158	350	542	705	350	542	670	*	*
750	627	16	176	400	592	755	350	542	702	*	*

Packing Unit: 20 sets per box

▶ prompt delivery * on request

FR 5000

SLIDE TYPE:	Full-Extension Linear Ball Bearing Drawer Slide - Telescopic-Action
MOUNTING:	Side Mount


WIDTH:	12,7 mm
LOAD CAPACITY:	dynamic up to 45 kg



MATERIAL:	steel, galvanized
------------------	-------------------

FEATURES:	linear steel ball bearings
------------------	----------------------------

SPECIFICATIONS:
<ul style="list-style-type: none"> ▶ universal hole pattern ▶ drawer removal by depressing lever in drawer profile ▶ stay-closed feature holds drawer in closed position ▶ tolerance absorbing mounting tabs

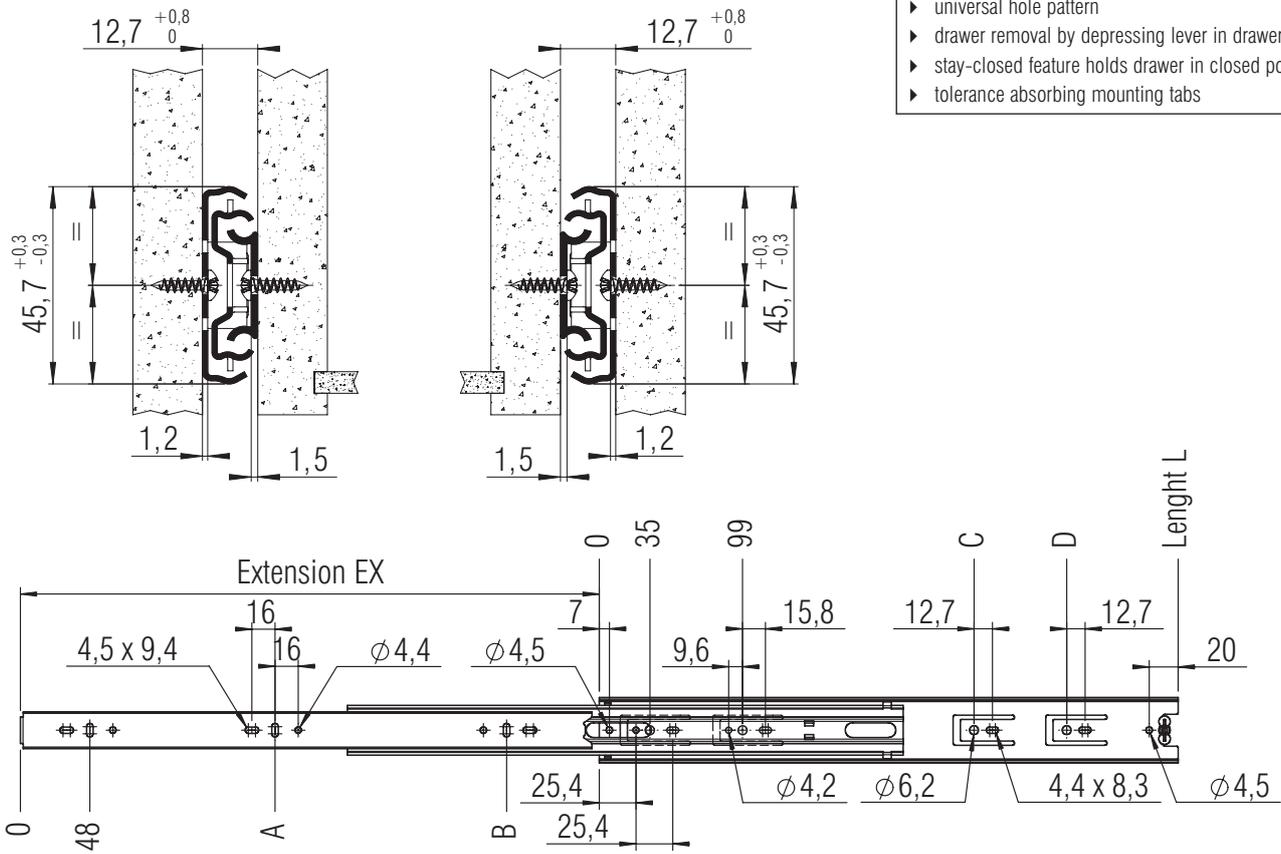

screw holes for 3,5 mm spax screws

L mm	EX mm	A mm	B mm	C mm	D mm	Weight per pair (kg)	Order No. galvanized
250	250	208		195		0,73	▶ 5050
300	302	240		227		0,89	▶ 5051
350	354	144	304	291		1,07	▶ 5052
400	400	176	336	323		1,17	▶ 5053
450	452	208	400	323	387	1,35	▶ 5054
500	515	240	464	323	451	1,53	▶ 5055
550	558	240	496	323	451	1,68	▶ 5056
600	600	272	560	355	515	1,83	▶ 5057
650	650	304	592	387	579	1,98	▶ 5058
700	705	304	656	387	611	2,14	▶ 5059

Packing Unit: 10 sets per box

▶ prompt delivery


FR 5000 ASW

ACCESSORY:	Side mount bracket for 5000
MONTAGE:	Side Mount

WIDTH:	14 mm
---------------	-------




Side mount bracket variant 1

Side mount bracket variant 2

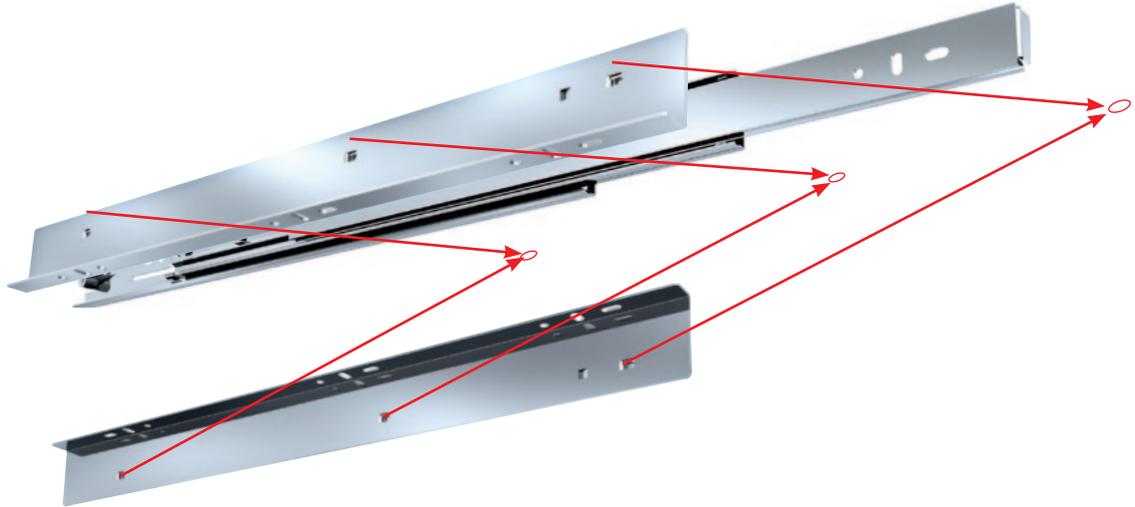

MATERIAL:	steel, bright galvanized
------------------	--------------------------

SPECIFICATIONS:
▶ Special side mount bracket for lateral mounting on FR 5000
▶ For various mounting variants:
- Floor mounting
- Tray mounting
- Surface-mounted slide mounting

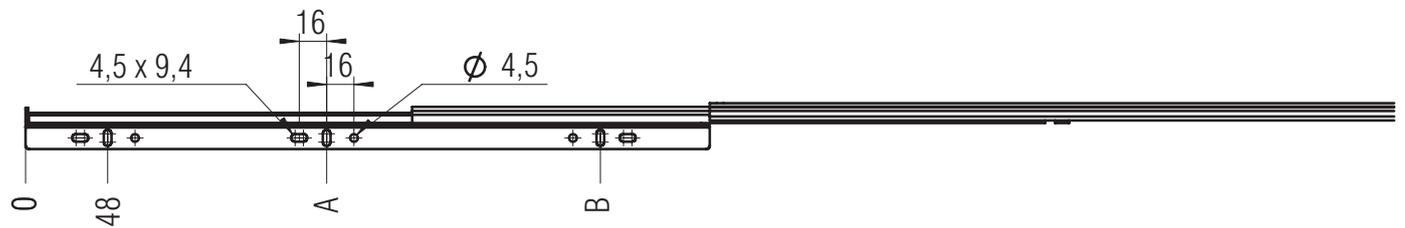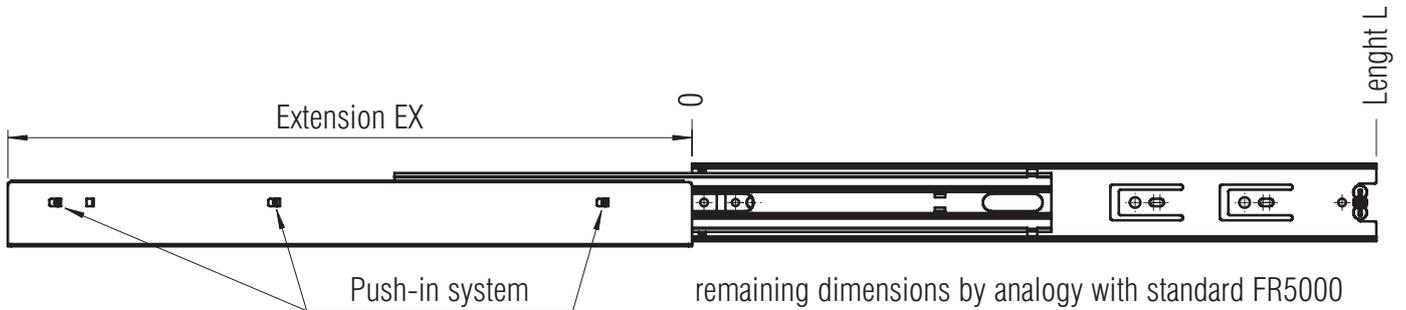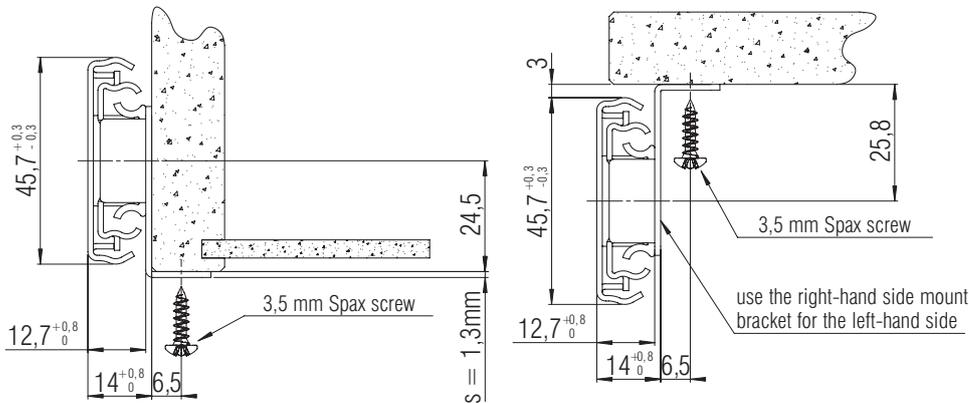

screw holes for 3,5 mm spax screws

Length mount bracket mm	Weight per pair (kg)	Order No. galvanized
400	0,36	▶ 5032
450	0,49	▶ 5033
500	0,46	▶ 5034
550	0,51	▶ 5035

Packing Unit: 30 sets per box ▶ prompt delivery

FR 5001 ECD

SLIDE TYPE:	Full-Extension Linear Ball Bearing Drawer Slide - Telescopic-Action
MOUNTING:	Side Mount

WIDTH:	12,3 mm
LOAD CAPACITY:	dynamic up to 45 kg



ECD



MATERIAL:	steel, galvanized
------------------	-------------------

FEATURES:	linear steel ball bearings
------------------	----------------------------

SPECIFICATIONS:
▶ universal hole pattern
▶ drawer removal by depressing lever in drawer profile
▶ stay-closed feature holds drawer in closed position
▶ tolerance absorbing mounting tabs
⊕ also available with Easy Close Device (ECD)

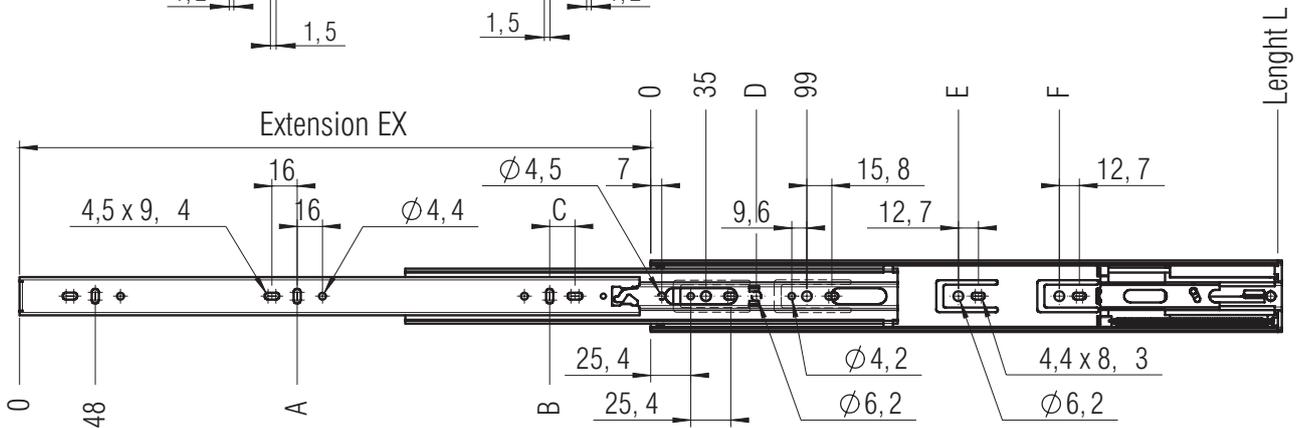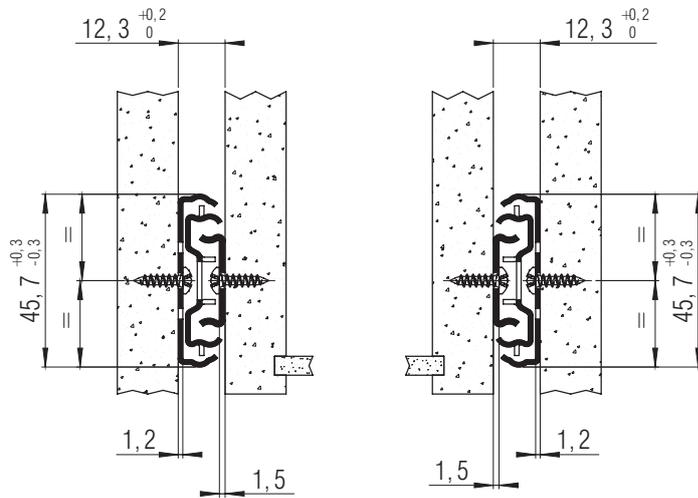

screw holes for 3,5 mm spax screws

L mm	EX mm	A mm	B mm	C mm	D mm	E mm	F mm	Weight per pair (kg)	Order No. galvanized
300	300	240			67	195		0,85	▶ 5061
350	350	144	272	16	67	227		1,00	▶ 5062
400	400	176	336	16		259		1,15	▶ 5063
450	450	208	400			259	323	1,30	▶ 5064
500	500	240	432	16		259	387	1,45	▶ 5065
550	550	240	496			259	419	1,60	▶ 5066
600	600	272	528	16		259	483	1,75	▶ 5067
650	650	304	592	16		259	515	1,90	▶ 5068
700	700	304	624	16		259	579	2,05	▶ 5069
700	705	304	656			387	611	2,14	▶ 5059

Packing Unit: 10 sets per box

▶ prompt delivery

Fulterer

FR 5036

SLIDE TYPE:	Full-Extension Linear Ball Bearing Drawer Slide - Telescopic-Action
MOUNTING:	Side Mount



WIDTH:	12,7 mm
LOAD CAPACITY:	dynamic up to 30 kg



MATERIAL: steel, bright galvanized

FEATURES: linear steel ball bearings

- SPECIFICATIONS:**
- ▶ universal hole pattern
 - ▶ drawer removal possible
 - ▶ tolerance absorbing mounting tabs
 - ▶ **self-closing**

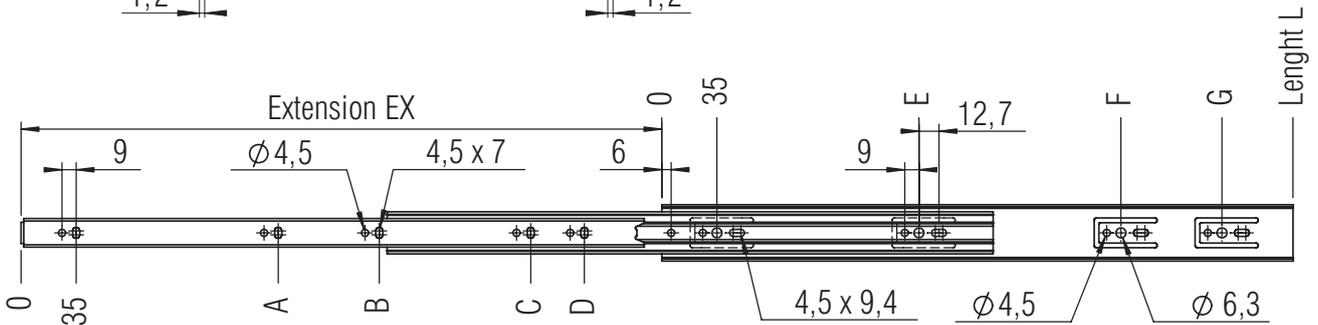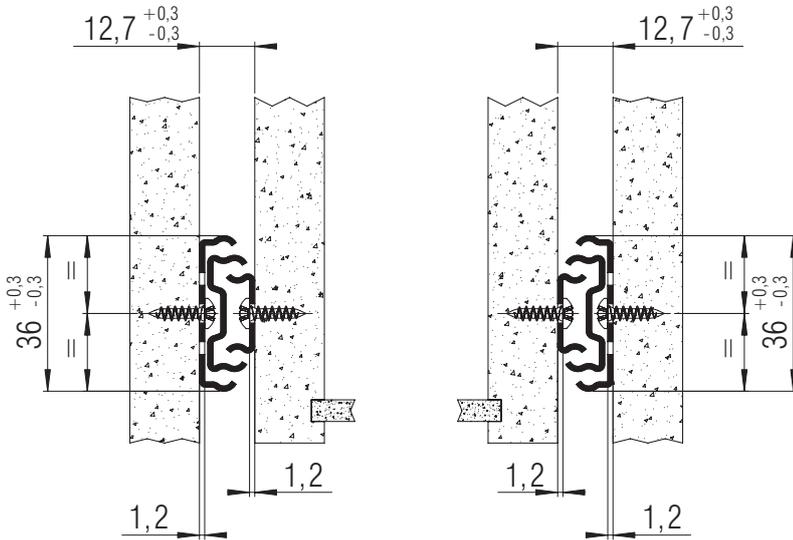

screw holes for 3,5 mm spax screws

L mm	EX mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Weight per pair (kg)	Order No. galvanized
250	254	207				131			0,58	▶ 5080
300	305	163	257			195			0,69	▶ 5081
350	356	163	307			163	259		0,82	▶ 5082
400	406	163	357			163	291		0,92	▶ 5083
450	457	163	355	407		163	355		1,06	▶ 5084
500	508	163	227	387	457	163	323	387	1,15	▶ 5085
550	559	163	259	451	507	163	323	451	1,27	▶ 5086
600	610	163	259	451	557	163	355	483	1,39	▶ 5087

Packing Unit: 20 sets per box

▶ prompt delivery

FR 505 CS

SLIDE TYPE:	Regular-Extension Drawer Slide
MOUNTING:	Bottom Mount




WIDTH:	15 mm
LOAD CAPACITY:	dynamic up to 100 kg



MATERIAL:	stainless steel
------------------	-----------------

FEATURES:	chrome steel ball bearings with integrated nylon gliding ring
------------------	---

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ cabinet and drawer profile with screw holes ▶ lateral stability provided by specially shaped profiles ▶ self-closing ▶ rear backstop
<p>ⓘ on request, also available in a heat resistant version for -40 to +210 °C.</p>

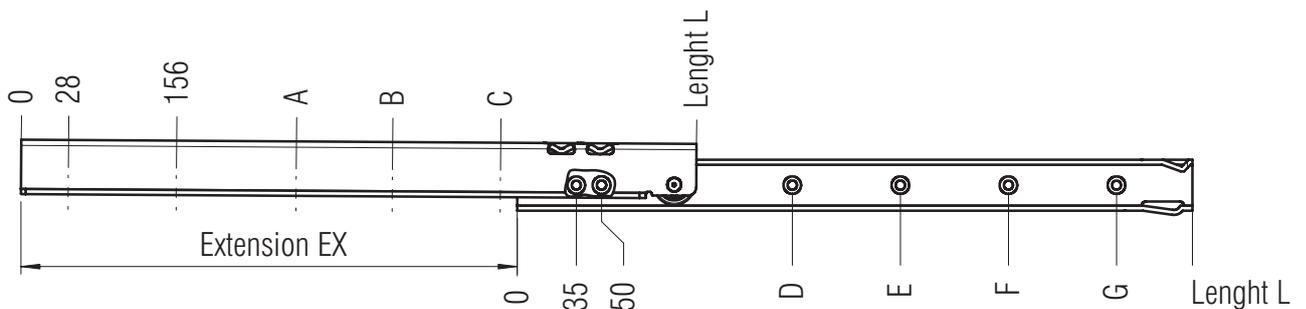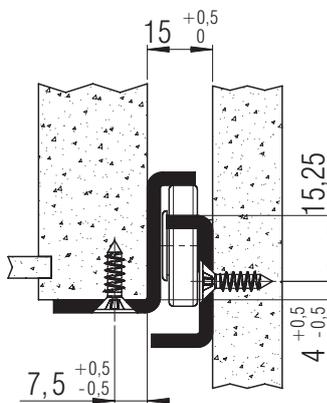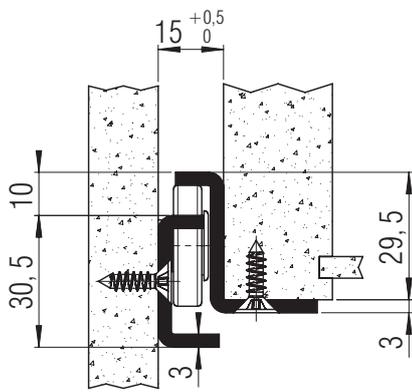

screw holes for 4,5 mm spax screws

L mm	EX mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Weight per pair (kg)	Order No.
400	294	348			163	355			2,08	▶ 1060
450	344	348			163	355			2,33	▶ 1061
500	394	348	444		163	355	451		2,57	▶ 1062
550	444	348	476		163	355	483		2,82	▶ 1063
600	494	348	540		195	355	547		3,06	▶ 1064
650	544	348	540		163	355	547		3,31	▶ 1065
700	584	380	540	636	163	355	547	643	3,55	▶ 1066
750	634	380	540	636	163	355	547	643	3,80	▶ 1067

Packing Unit: 5 sets per box

▶ prompt delivery

FR 505 CS-F

SLIDE TYPE:	Regular-Extension Drawer Slide with Folding Frame
MOUNTING:	Bottom Mount




WIDTH:	15 mm
LOAD CAPACITY:	dynamic up to 100 kg



MATERIAL:	stainless steel
------------------	-----------------

FEATURES:	chrome steel ball bearings with integrated nylon gliding ring
------------------	---

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ cabinet and drawer profile with screw holes ▶ lateral stability provided by specially shaped profiles ▶ folding frame version (see Fig. 2) ▶ delivery: not folded – requires very little packing and storage space (see Fig. 1) <hr/> <p>① quick assembly – with a simple folding action you get a very stable cabinet frame, which can be fixed to the side or back panel</p>

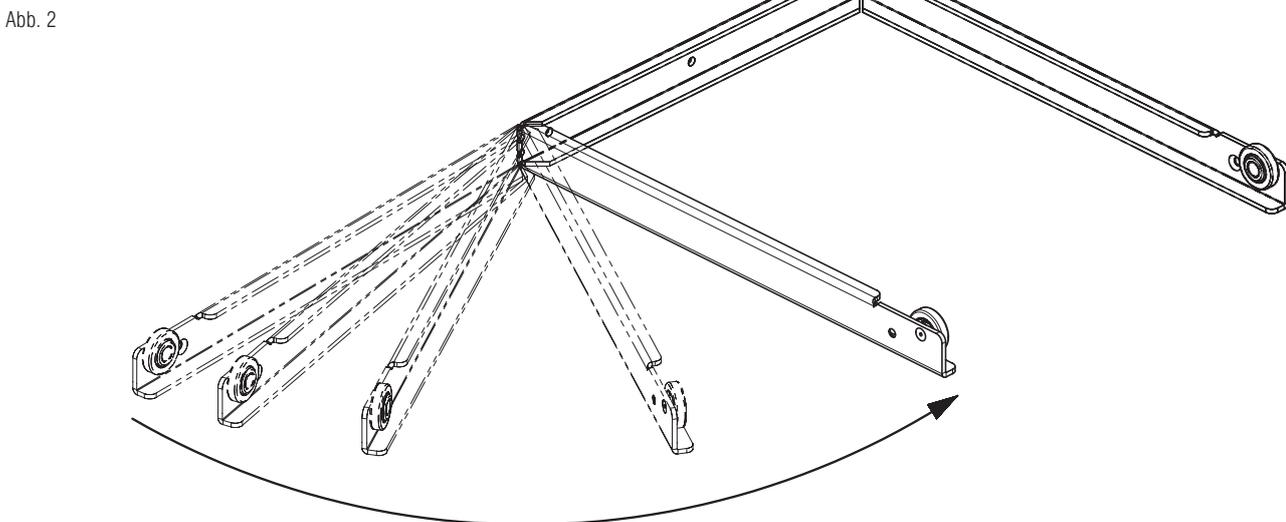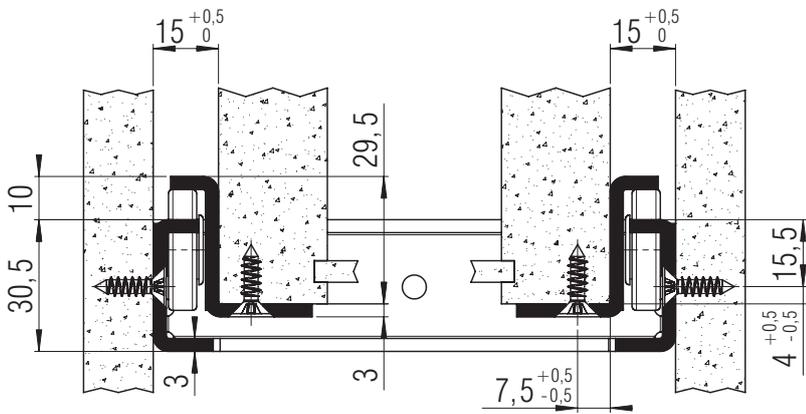

Dimensions, minimum order quantity and lead time on request

FR 505-T

SLIDE TYPE:	Door Display Slide
MOUNTING:	Top Mount



WIDTH:	min. 73 mm
LOAD CAPACITY:	dynamic up to 80 kg



MATERIAL: steel, powder coated

FEATURES: delrin*-encased steel ball bearings

- SPECIFICATIONS:**
- ▶ for use in all types of showrooms and shops with display walls, door panels etc.
 - ▶ offers absolute lateral stability as a pre-mounted unit with a special profile form
 - ▶ light, rigid and silent movement via special roller assembly
 - ▶ simple assembly via countersunk fixing holes for M6 countersunk screws
 - ▶ built-in friction stop in the closed and extended position

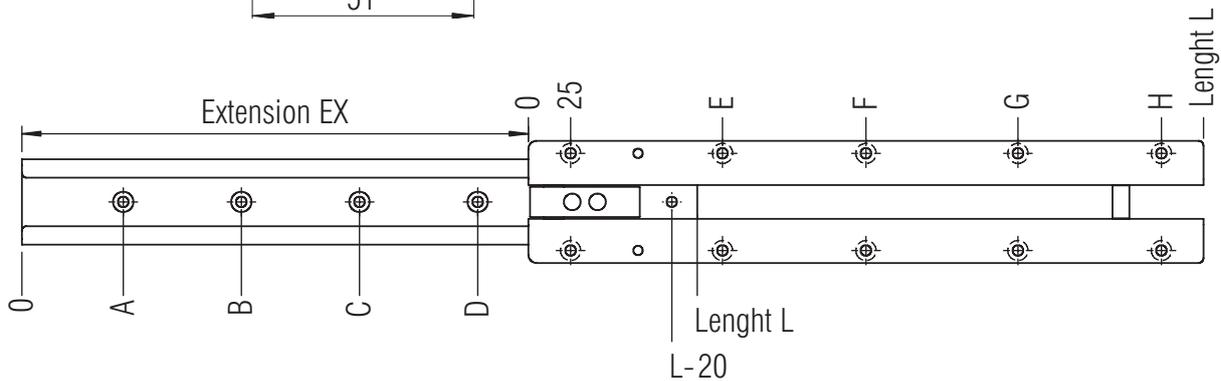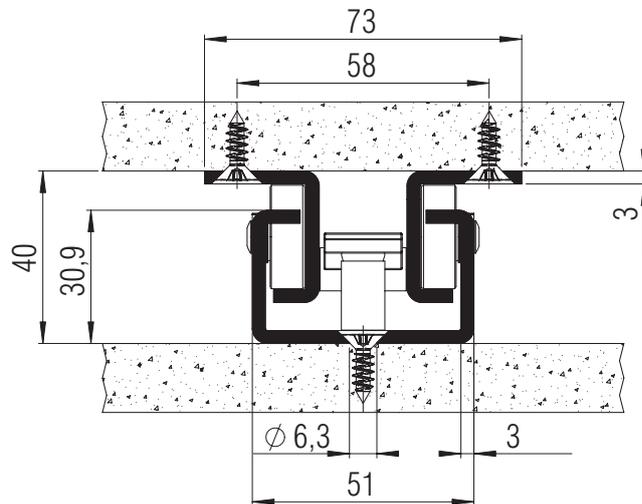

screw holes for 5 mm spax screws / M6 countersunk screws

L mm	EX mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Weight per set (kg)	Order No. black	Order No. white
450	340	60	250			115	340			*	*	*
500	375	60	300			115	390			*	*	*
600	450	60	400			115	490			*	*	*
700	525	210	450			115	540			*	*	*
800	600	210	550			115	640			*	*	*
900	675	160	600			115	690			*	*	*
995	750	160	700			115	785			5,73	▶ 80134	*
1050	790	25	275	525	775	275	525	775	1025	*	*	*
1100	825	160	700			115	215	870		*	*	*


Packing Unit: 4 sets per box

▶ prompt delivery * on request

FR 5052

SLIDE TYPE:	Full-Extension Linear Ball Bearing Drawer Slide - Telescopic-Action
MOUNTING:	Side Mount



WIDTH:	12,9 mm
LOAD CAPACITY:	dynamic up to 90 kg

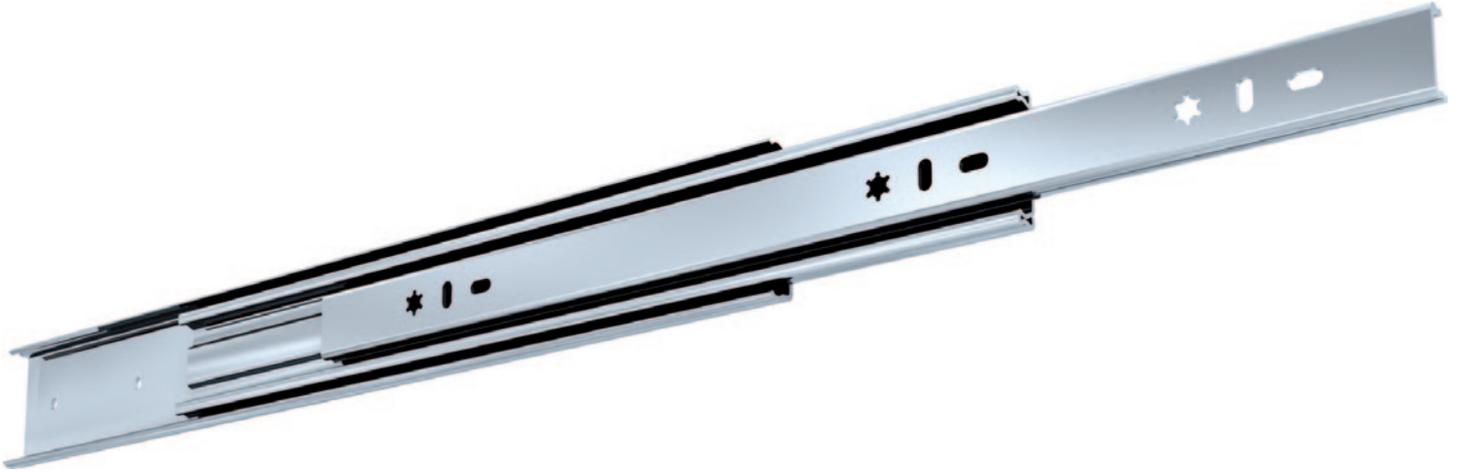

MATERIAL:	steel, bright galvanized
------------------	--------------------------

FEATURES:	linear steel ball bearings
------------------	----------------------------

SPECIFICATIONS:
▶ universal hole pattern
▶ Drawer can be lifted out by pressing down the release lever in the drawer rail
▶ Retainer holds the drawer securely in the closed position

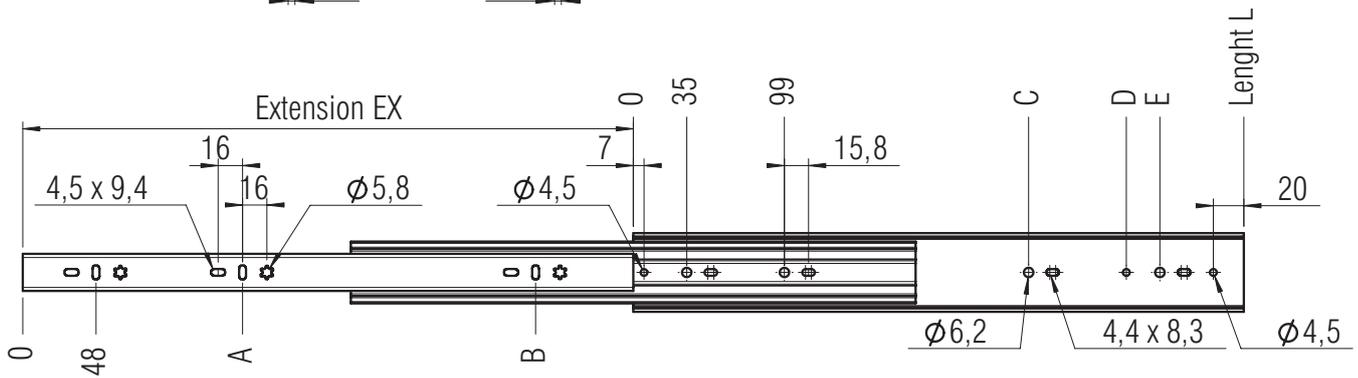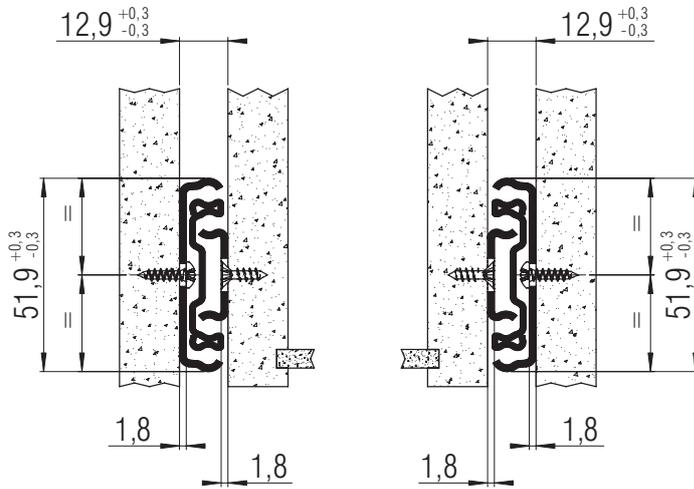

screw holes for 3,5 mm spax screws

L mm	EX mm	A mm	B mm	C mm	D mm	E mm	Weight per pair (kg)	Order No. galvanized
350*	354	112	304	259			1,59	▶ 5152
400*	400	144	336	259	323		1,83	▶ 5153
450*	452	176	400	259	323	387	2,05	▶ 5154
500**	515	176	464	259	323	451	2,36	▶ 5155
550**	558	208	496	259	323	451	2,69	▶ 5156
600***	600	240	560	259	323	515	2,80	▶ 5157
650***	650	240	560	259	323	579	3,05	▶ 5158
700***	705	272	656	259	323	611	3,30	▶ 5159

Packing Unit (per box): *10 sets **8 sets ***6 sets

▶ prompt delivery

Fulterer

FR 506-B

SLIDE TYPE:	Regular-Extension, Heavy Duty Slide
MOUNTING:	Bottom Mount

WIDTH:	min. 89 mm
LOAD CAPACITY:	dynamic up to 100 kg





MATERIAL:	steel, powder coated
------------------	----------------------

FEATURES:	solid delrin* rollers
------------------	-----------------------



SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ ideally suited for displays, exhibits and store fixtures ▶ absolute lateral stability provided by specially shaped profiles ▶ light, rigid and silent movement via special roller assembly ▶ simple assembly of the pullout unit via countersunk fixing holes for M6 countersunk screws
<ul style="list-style-type: none"> ① available with top guide on request ② special designs available on request

*DuPont (TM) Delrin®

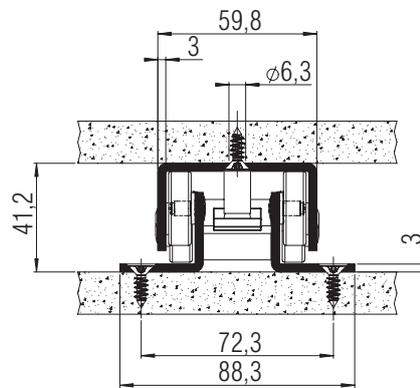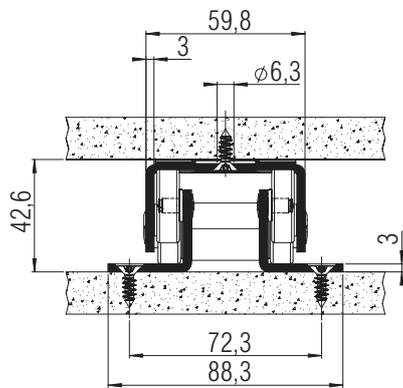

with roll-out prevention

without roll-out prevention

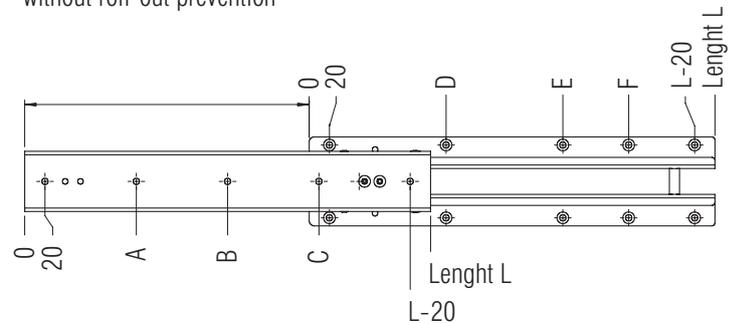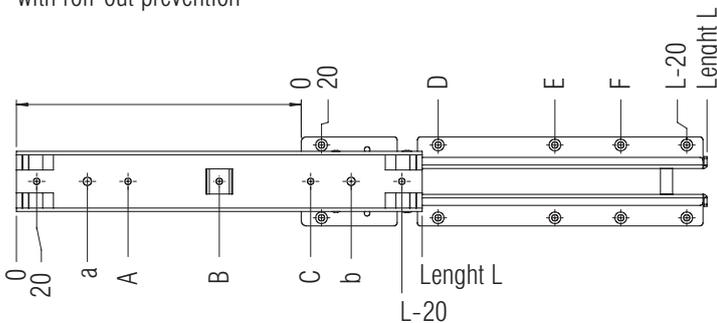

screw holes for 5 mm spax screws / M6 countersunk screws

L mm	EX mm	A mm	B mm	C mm	a mm	b mm	D mm	E mm	F mm	Weight per set (kg)	Order No.
400	280		200					250		*	*
450	330		225					275		*	*
500	380		250		70	372,6		300		*	*
550	430		275		70	372,6		325		*	*
600	480		300		126	467		350		*	*
650	520	172,5	325	477,5	126	467	197,5	375	502,5	*	*
700	560	185	350	515	126	467	210	400	540	*	*
750	600	197,5	375	552,5			222,5	425	577,5	*	*
800	640	210	400	590			235	450	615	*	*
850	680	222,5	425	627,5			247,5	475	652,5	*	*
900	720	235	450	665			260	500	690	*	*
950	760	247,5	475	702,5			272,5	525	727,5	*	*
1000	800	260	500	740			285	550	765	*	*
1050	840	272,5	525	777,5			297,5	575	802,5	*	*

Packing Unit: **on request**

*** on request**

FR 6000

SLIDE TYPE:	Full-Extension Drawer Slide - Progressive-Action
MOUNTING:	Side Mount

WIDTH:	15 mm
LOAD CAPACITY:	dynamic up to 50 kg





MATERIAL: steel or white powder coated

FEATURES: delrin* encased steel ball bearings

- SPECIFICATIONS:**
- ▶ excellent lateral stability provided by specially shaped profiles
 - ▶ with over-extension of at least 30 mm (standard)
 - ▶ holdout catch on middle profile for easy drawer insertion
 - ▶ double holes at front of cabinet profile reinforce against heaviest loads
 - ▶ double-sided captive profile
 - ▶ soft stop

*DuPont (TM) Delrin®

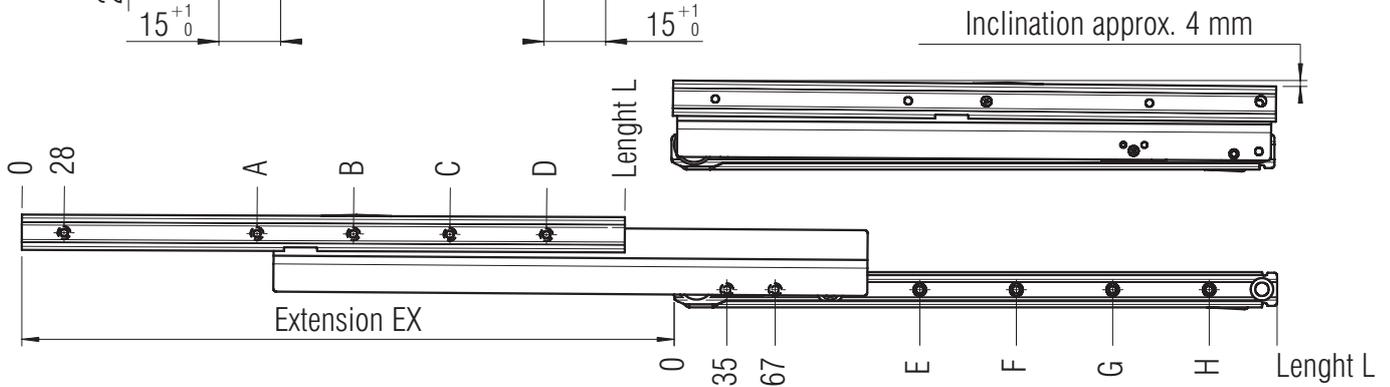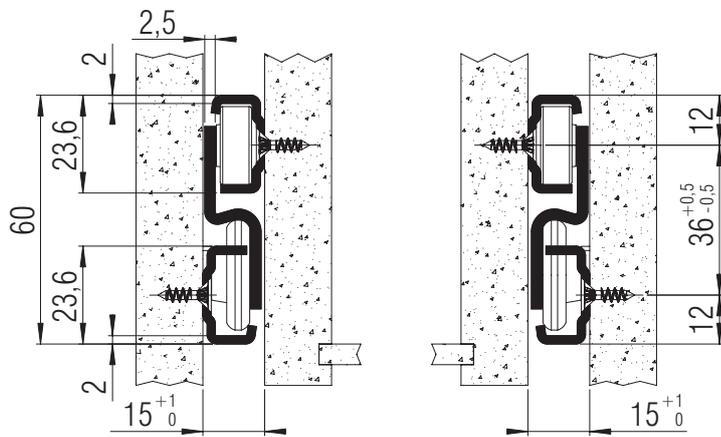

screw holes for 3,5 mm spax screws

L mm	EX mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Weight per pair (kg)	Order No. white
300	300	124	252			131	259			1,49	▶ 3149
350	380	156	284			163	291			1,73	▶ 3150
400	430	156	316			163	323			1,96	▶ 3151
450	480	188	380			195	387			2,20	▶ 3152
500	530	156	284	412		163	291	419		2,43	▶ 3153
550	580	156	316	476		163	323	483		2,67	▶ 3154
600	630	188	348	540		195	355	515		2,89	▶ 3155
650	680	188	380	572		195	387	579		3,17	▶ 3156
700	730	124	252	476	636	163	323	483	643	3,40	▶ 3157
750	780	156	284	508	700	195	355	515	675	3,64	▶ 3158
800	830	188	316	540	732	195	355	547	739	3,87	▶ 3159

Packing Unit: 6 sets per box

▶ prompt delivery

FR 6000-T

SLIDE TYPE:	Regular-Extension Drawer Slide for pull-out shelves and keyboards
MOUNTING:	Side Mount

WIDTH:	15 mm
LOAD CAPACITY:	dynamic up to 30 kg





MATERIAL:	steel, grey powder coated
------------------	---------------------------

FEATURES:	solid delrin* rollers
------------------	-----------------------

SPECIFICATIONS:
<ul style="list-style-type: none"> ▶ laterally stable Regular-Extension Drawer slide ▶ locked in extended position by overrun clip ▶ assembly to the side panel for screwing in the row of holes 32 mm ▶ assembly to the shelf for screwing, side mount <hr/> <p>Ⓜ observe the following sequence, as the shelf is not demountable once it is has been installed:</p> <ol style="list-style-type: none"> 1. screw on the cabinet profile to the side 2. mount the shelf profile and pull out as far as the locking position 3. insert the shelf and screw on <hr/> <p>Ⓜ other lengths available on request</p>

*DuPont (TM) Delrin®

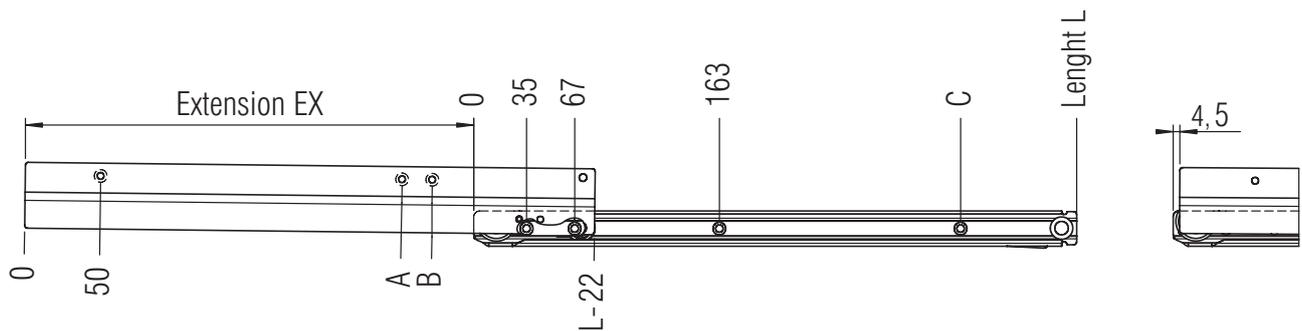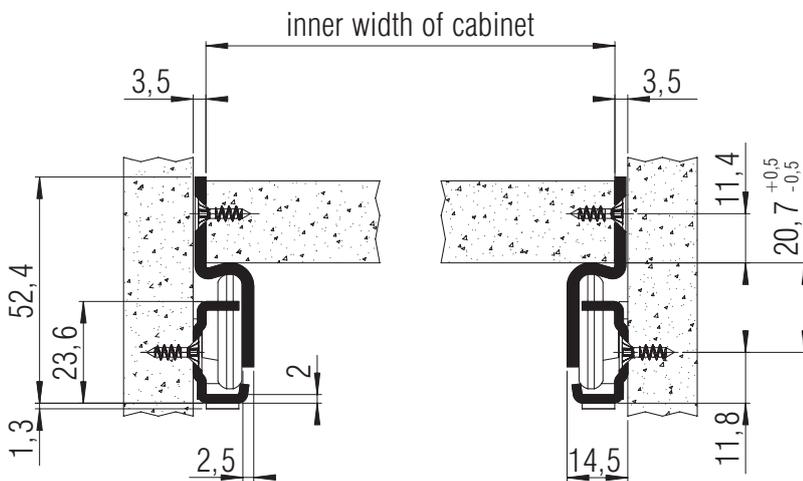

screw holes for 3,5 mm spax screws

L mm	EX mm	A mm	B mm	C mm	Weight per pair (kg)	Order No. light grey
350	247,5	200	220	291	1,21	▶ 7271
400	297,5	250	270	323	1,38	▶ 7272

Packing Unit: 10 sets per box

▶ prompt delivery, other lengths on request

Fulterer

FR 6010

SLIDE TYPE:	Full-Extension Drawer Slide - Telescopic-Action
MOUNTING:	Side Mount


WIDTH:	15 mm
LOAD CAPACITY:	dynamic up to 50 kg




MATERIAL: steel, galvanized

FEATURES: delrin* encased steel ball bearings

- SPECIFICATIONS:**
- ▶ excellent lateral stability provided by specially shaped profiles
 - ▶ with over-extension of at least 30 mm (standard)
 - ▶ holdout catch on middle profile for easy drawer insertion
 - ▶ double holes at front of cabinet profile reinforce against heaviest loads
 - ▶ double-sided captive profile
 - ▶ soft stop

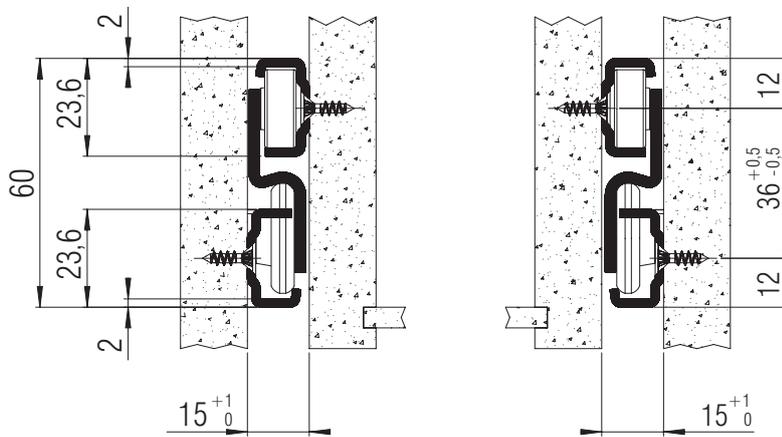

Inclination approx. 4 mm

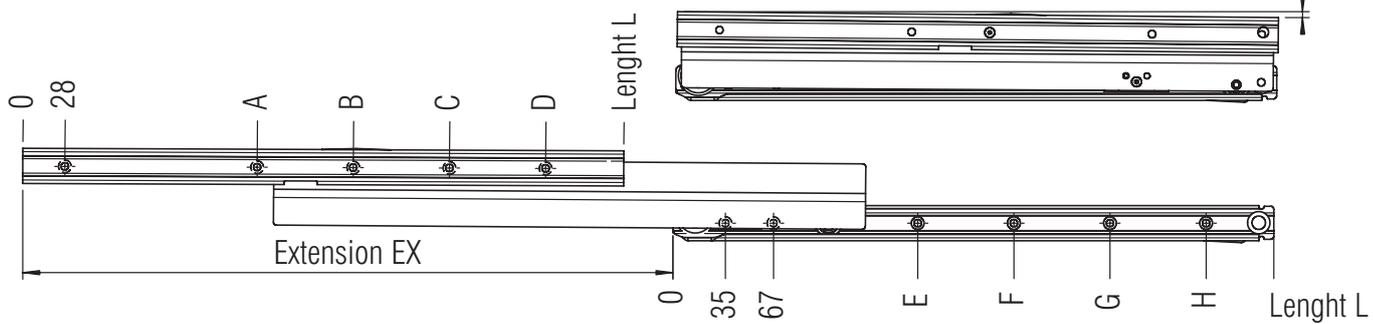

screw holes for 3,5 mm spax screws

L mm	EX mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Weight per pair (kg)	Order No. galvanized
300	300	124	252			131	259			1,51	▶ 2500
350	380	156	284			163	291			1,74	▶ 2501
400	430	156	316			163	323			1,97	▶ 2502
450	480	188	380			195	387			2,20	▶ 2503
500	530	156	284	412		163	291	419		2,43	▶ 2504
550	580	156	316	476		163	323	483		2,67	▶ 2505
600	630	188	348	540		195	355	515		2,90	▶ 2506
650	680	188	380	572		195	387	579		*	*
700	730	124	252	476	636	163	323	483	643	*	*
750	780	156	284	508	700	195	355	515	675	*	*
800	830	188	316	540	732	195	355	547	739	*	*

Packing Unit: 6 sets per box

▶ prompt delivery * on request

FR 6010 CS

SLIDE TYPE:	Full-Extension Drawer Slide - Telescopic-Action
MOUNTING:	Side Mount

WIDTH:	15 mm
LOAD CAPACITY:	dynamic up to 50 kg (full-ext.)




MATERIAL:	stainless steel
------------------	-----------------

FEATURES:	chrome steel ball bearings with integrated nylon gliding ring or solid delrin* rollers
------------------	--

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ cabinet and drawer profile with screw holes ▶ high lateral stability through specially formed middle profile ▶ middle profile with locking device for easy assembly ▶ with over-extension of at least 30 mm (standard) ▶ double-sided captive profile ▶ self-closing ▶ soft stop <hr/> <p>① compatible with regular-extension drawer slides FR 1051 CS, FR 2051 CS and FR 2071 CS</p> <hr/> <p>② on request, also available in a heat resistant version for -40 to +210 °C</p>

*DuPont (TM) Delrin®

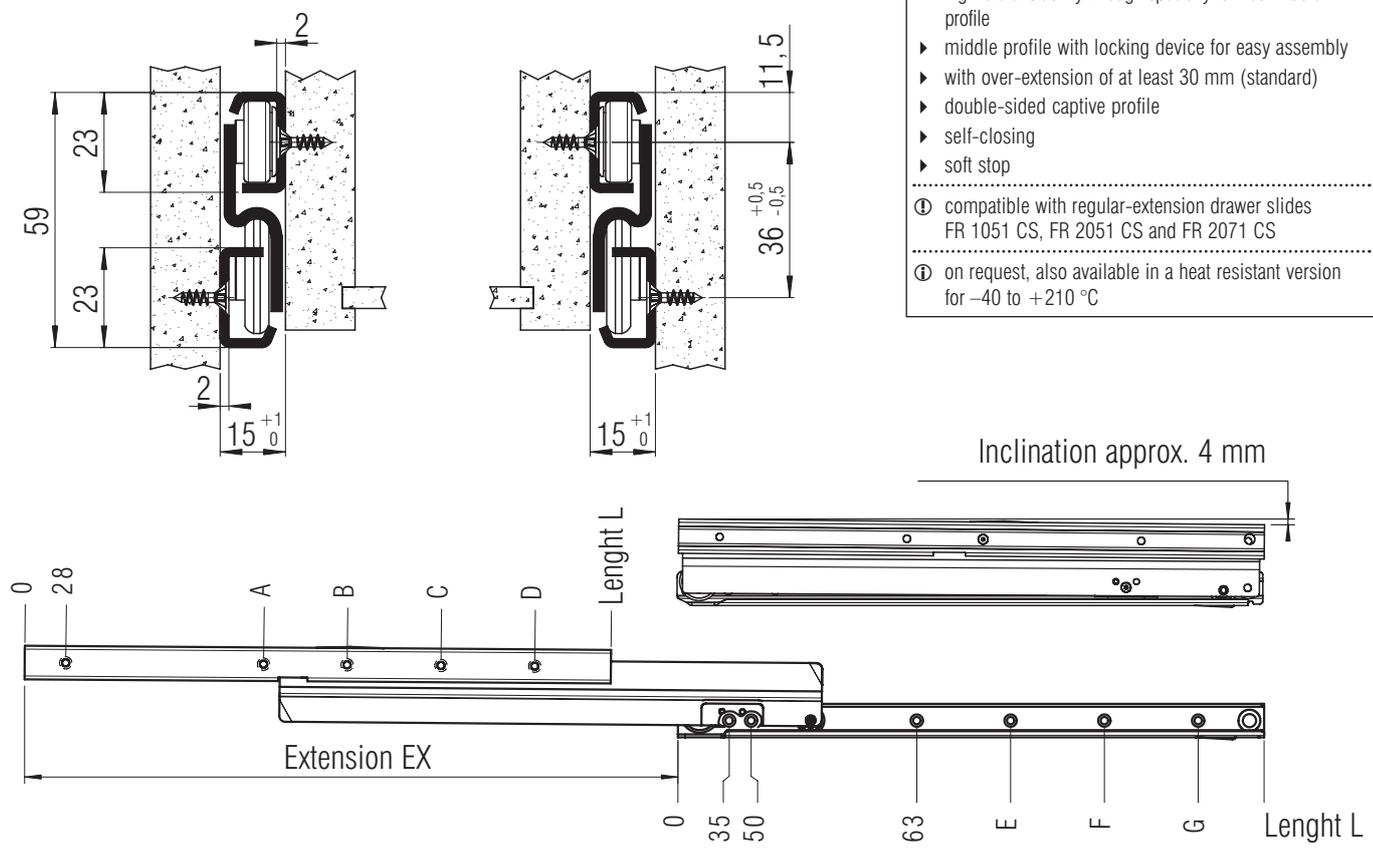

screw holes for 3,5 mm spax screws

L mm	EX mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Weight per pair (kg)	Order No. delrin rollers	Order No. heatresistant	Order No. steel ball bearings
300	320	124	284			259			1,52	*	*	▶ 1068
350	395	156	284			291			1,75	*	▶ 2521	▶ 1069
400	445	156	348			355			1,98	▶ 90214	▶ 2522	▶ 1070
450	495	156	348			355			2,19	▶ 90215	*	▶ 1071
500	545	156	348	444		355	451		2,42	▶ 90216	▶ 2524	▶ 1072
550	595	156	348	476		355	483		2,66	▶ 90217	▶ 2525	▶ 1073
600	645	156	348	540		355	547		2,89	▶ 90218	▶ 2526	▶ 1074
650	695	156	348	540		355	547		3,12	▶ 90219	*	▶ 1075
700	745	156	380	540	636	355	547	643	3,40	*	*	▶ 1076
750	795	156	348	540	636	355	547	643	3,58	*	*	▶ 1077

Packing Unit: 6 sets per box

▶ prompt delivery * on request

FR 6500

SLIDE TYPE:	Full-Extension Drawer Slide - Telescopic-Action
MOUNTING:	Bottom Mount



WIDTH:	12 mm
LOAD CAPACITY:	dynamic up to 50 kg



MATERIAL:	steel or white powder coated
------------------	------------------------------

FEATURES:	solid delrin* rollers, silent rollers
------------------	---------------------------------------

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ lateral stability provided by specially shaped profiles ▶ with impact-absorbing stop and overrun safety clip already mounted in middle profile ▶ easy mounting and removal of middle profile ▶ special reinforcement of middle profile ▶ special geometry of backstops and self-closing features ensures quiet operation and precise guidance of middle profile ▶ with over-extension (standard) ▶ double-sided captive profile ▶ self-closing
<p>① compatible with regular-extension drawer slides FR 2021, FR 2022 and the FR 2026 in the 32 mm system</p>

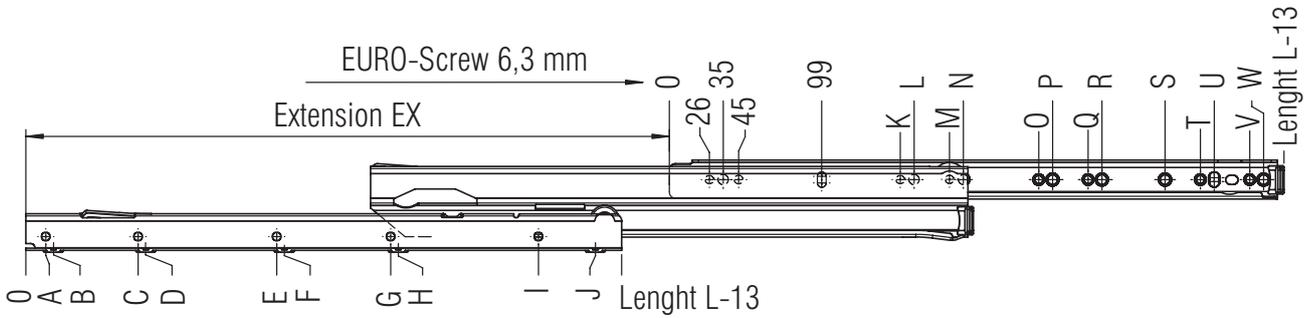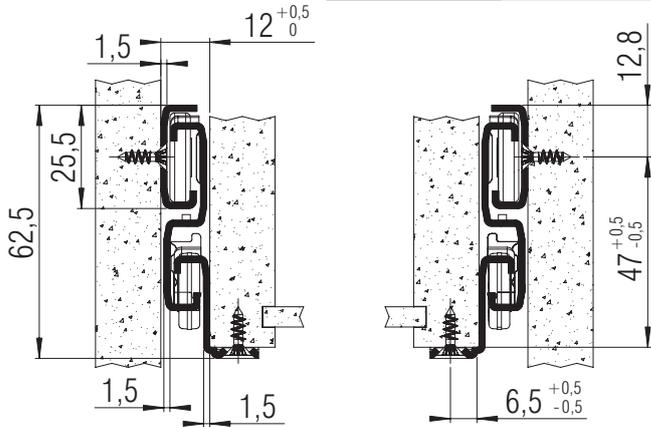

screw holes for 3,5 mm spax screws

L	EX	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	Weight per pair kg	Order No. white	
200	200			42							170	122	131	154	163										0,79	▶ 1200
250	250		28								220	186	195	218	227										0,97	▶ 1201
300	320		46		142						270	250		282			227					259		1,18	▶ 1202	
350	370	27	32	187	192					283	320	250		282	291		227					259		1,36	▶ 1203	
400	420	13	18	237	242					333	370	250		282	291		227					259		1,54	▶ 1204	
450	470	31	36	287	292					383	420	250	259	282	291		387	410				419		1,73	▶ 1205	
500	550	17	22	113	118	337	342			433	470	250	259	282	291	442	419	474	483			451		1,94	▶ 1206	
550	570	35	40	163	168	387	392			483	520	250	259	282	291	506	483	538				515		2,11	▶ 1207	
600	620	21	26	213	218	437	442			533	570	250	259	282	291	506	483	538	547			515		2,29	▶ 1208	
650	670	39	44	263	268	487	492			583	620	250	259	282	291	506	483	538	547			515		2,48	▶ 1260	
700	750	25	30	185	190	313	318	537	542	633	670	250	259	282	291	506	483	538	547			515		2,67	▶ 1261	
750	770	43	48	235	240	363	368	587	592	683	720	250	259	282	291	506	515	538	547	675	698	707	730	2,85	▶ 1262	
800	820	29	34	221	226	413	418	637	642	733	770	250	259	282	291	506	515	538	547	739	762	771		3,05	▶ 1263	

Packing Unit: 10 sets per box

▶ prompt delivery

FR 7100

SLIDE TYPE:	Full-Extension Drawer Slide - Progressive-Action
MOUNTING:	Bottom Mount


WIDTH:	24 mm
LOAD CAPACITY:	dynamic up to 100 kg (full-ext.) dynamic up to 90 kg (over-ext.)



MATERIAL:	steel, bright galvanized or light grey powder coated
------------------	--

FEATURES:	solid delrin* rollers
------------------	-----------------------

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ cabinet and drawer profile with screw holes ▶ high lateral stability through specially formed middle profile and guide rollers ▶ ideal running characteristic and smoothness of running through integrated progressive-action ▶ safety clip mounted in middle profile ▶ double-sided captive profile ▶ self closing
<ul style="list-style-type: none"> ① compatible with regular-extension drawer slide FR 115 and FR 215 ② on request: available with 60 mm over-extension

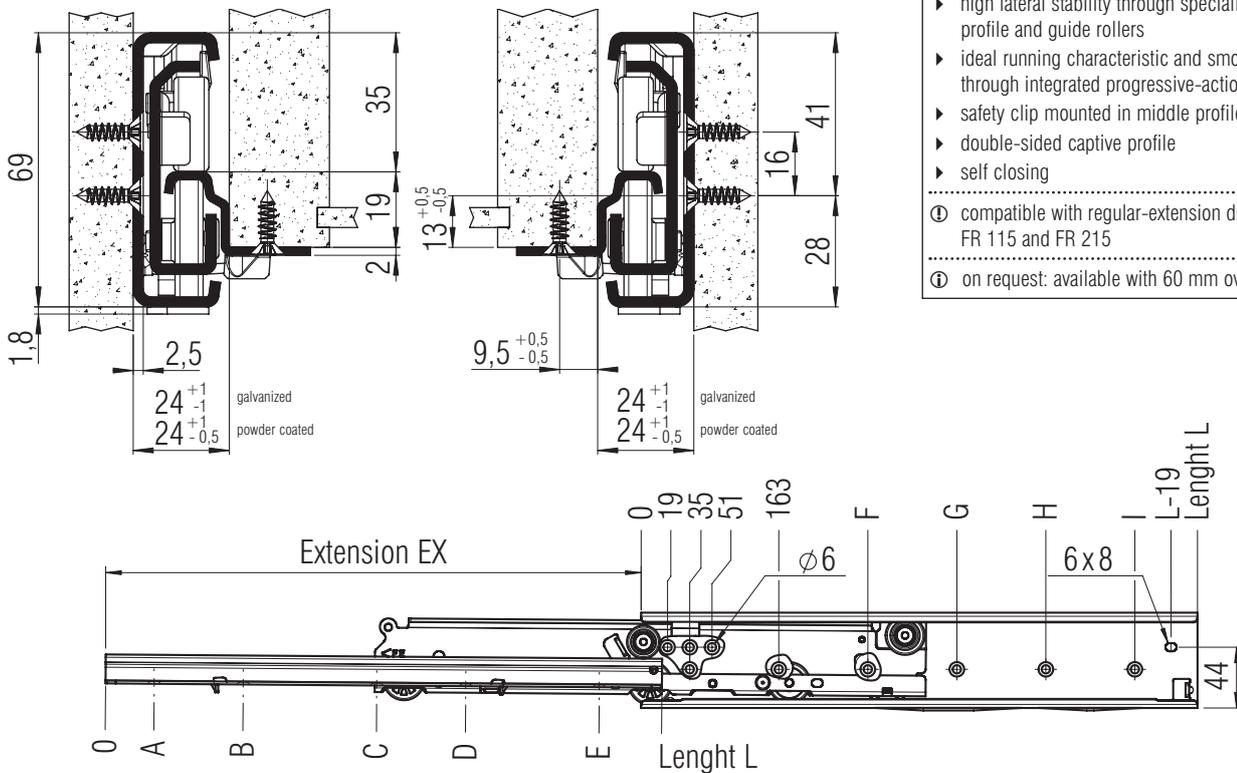

screw holes for 4,5 mm spax screws

L mm	EX full-ext.	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Weight per pair (kg)	Order No. light grey
400	385	46	238	366			323	387			3,64	▶ 7100
450	435	32	288	416			355	419			4,11	▶ 7101
500	485	50	146	370	466		291	451			4,57	▶ 7102
550	535	36	196	420	516		323	483			5,04	▶ 7103
600	585	22	246	438	566		355	547			5,50	▶ 7104
650	635	40	296	488	616		355	611			5,97	▶ 7105
700	685	26	186	346	538	666	355	515	643		6,43	▶ 7106
750	735	44	204	396	588	716	355	547	675		6,90	▶ 7107
800	785	30	190	446	638	766	355	611	739		*	*
850	835	48	240	464	688	816	355	611	771		*	*
900	885	34	290	578	738	866	355	611	835		*	*
950	935	20	340	628	788	916	355	611	771	899	*	*
1000	985	38	390	646	838	966	355	643	771	931	*	*

Packing Unit: 4 sets per box

▶ prompt delivery * minimum order quantity and lead time on request!

FR 7100 CS

SLIDE TYPE:	Full-Extension Drawer Slide - Progressive-Action
MOUNTING:	Bottom Mount

WIDTH:	24 mm
LOAD CAPACITY:	dynamic up to 120 kg (full-ext.) dynamic up to 105 kg (over-ext.)





MATERIAL:	stainless steel
------------------	-----------------

FEATURES:	solid delrin* rollers
------------------	-----------------------

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ cabinet profile with holes and drawer profile without holes for welding ▶ high lateral stability through specially formed middle profile and guide rollers ▶ ideal running characteristic and smoothness of running through integrated progressive-action ▶ safety clip mounted in middle profile ▶ double-sided captive profile ▶ self closing, soft stop
<ul style="list-style-type: none"> ① also available with 60 mm over-extension ② on request, also available as heat resistant model (up to 110° C) – load capacity 90 kg (full-ext.), 80 kg (over-ext.)

*DuPont (TM) Delrin®

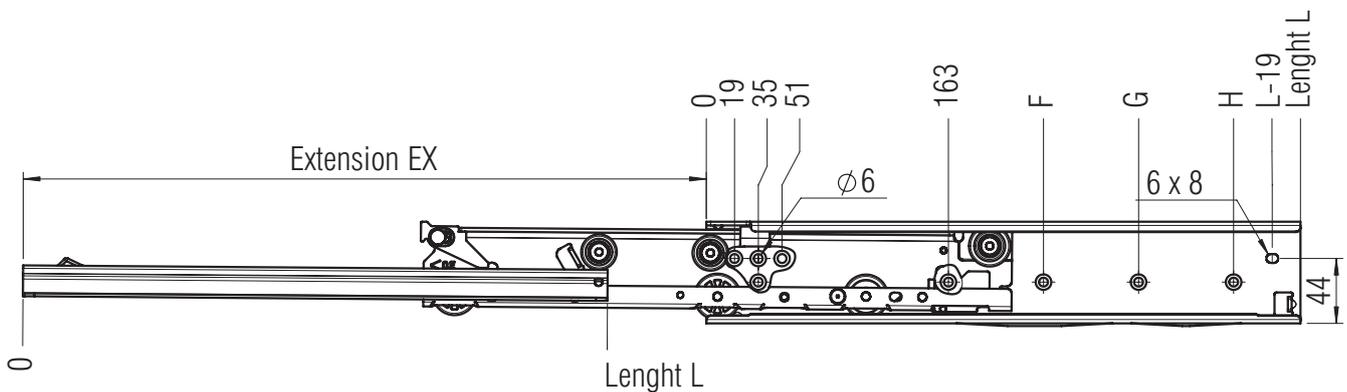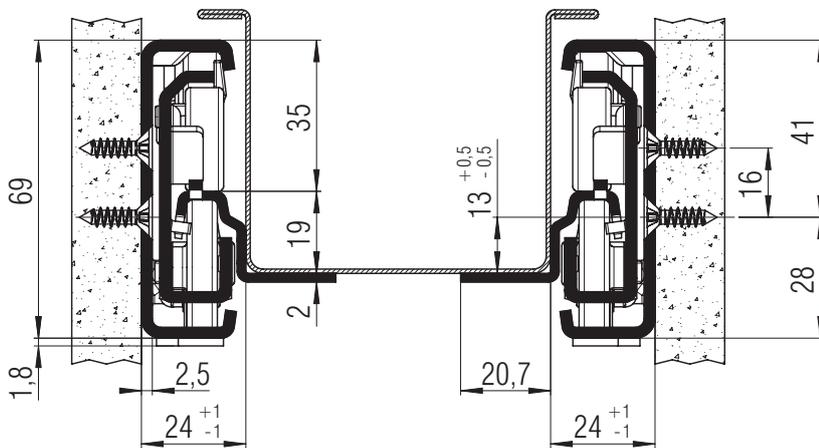

screw holes for 4,5 mm spax screws

L mm	EX full-ext.	EX over-ext.	F mm	G mm	H mm	Weight per pair (kg)	Order No. full-ext.	Order No. over-ext.
400	385	460	323			3,64	▶ 7130	*
450	435	510	355			4,11	▶ 7131	*
500	485	560	291	451		4,57	▶ 7132	*
550	535	610	323	483		5,04	▶ 7133	*
600	585	660	355	547		5,50	▶ 7134	*
650	635	710	355	611		5,97	▶ 7135	*
700	685	760	355	515	643	6,43	▶ 7136	*
750	735	810	355	547	675	6,90	▶ 7137	*

Packing Unit: 400-600 mm: 4 sets per box; 650-750 mm: 2 sets per box

▶ prompt delivery * minimum order quantity and lead time on request!

FR 7101 CS

SLIDE TYPE:	Full-Extension Drawer Slide - Progressive-Action
MOUNTING:	Side Mount



WIDTH:	24 mm
LOAD CAPACITY:	dynamic up to 120 kg (full-ext.) dynamic up to 105 kg (over-ext.)



MATERIAL:	stainless steel
------------------	-----------------

FEATURES:	solid delrin* rollers
------------------	-----------------------

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ cabinet profile with holes for welding and drawer profile without holes for welding ▶ high lateral stability through specially formed middle profile and guide rollers ▶ ideal running characteristic and smoothness of running through integrated progressive-action ▶ safety clip mounted in middle profile ▶ double-sided captive profile ▶ self closing, soft stop <hr/> <p>① also available with 60 mm over-extension</p> <p>② on request, also available as heat resistant model (up to 110° C) – load capacity 90 kg (full-ext.), 80 kg (over-ext.)</p>

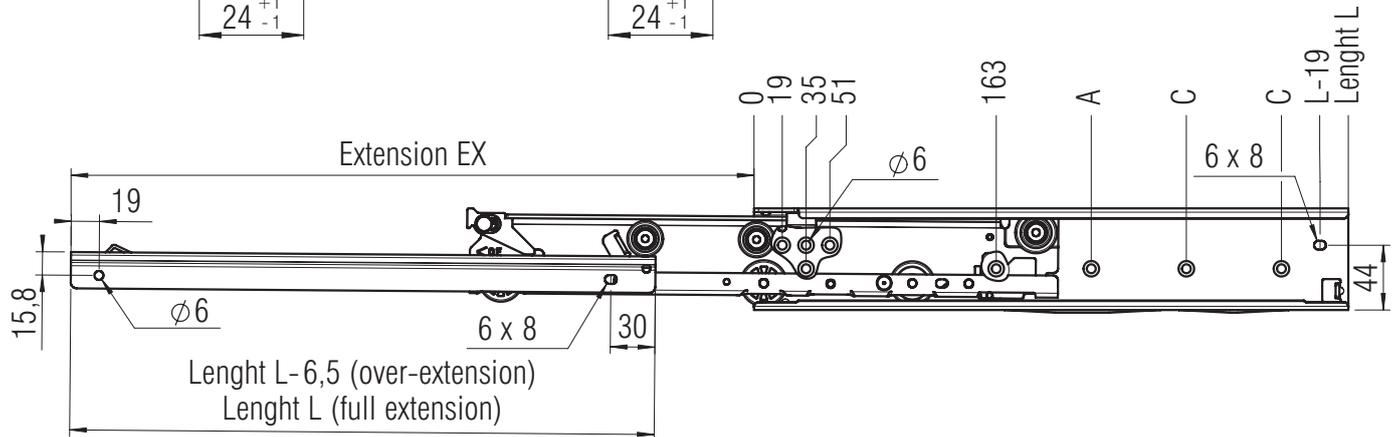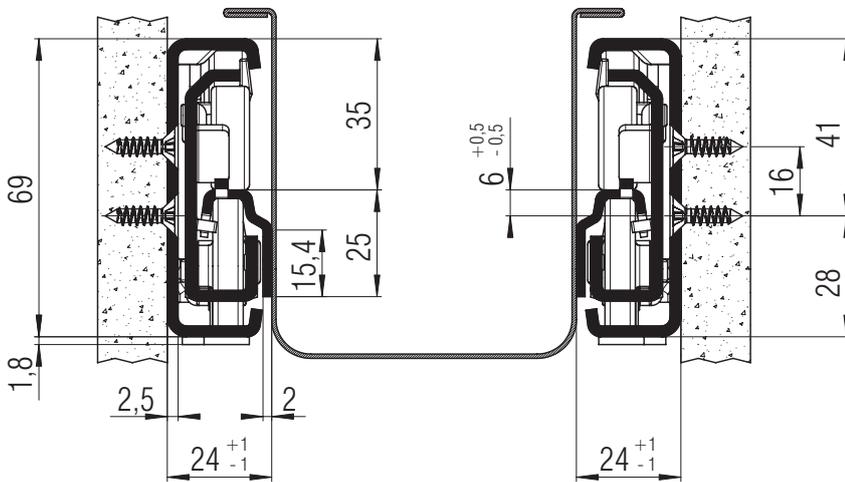

screw holes for 4,5 mm spax screws

L mm	EX full-ext.	EX over-ext.	A mm	B mm	C mm	Weight per pair (kg)	Order No. full-ext.	Order No. over-ext.
400	385	460	323			3,44	▶ 7110	*
450	435	510	355			3,88	▶ 7111	*
500	485	560	291	451		4,32	▶ 7112	▶ 7122
550	535	610	323	483		4,76	▶ 7113	▶ 7123
600	585	660	355	547		5,20	▶ 7114	▶ 7124
650	635	710	355	611		5,64	▶ 7115	*
700	685	760	355	515	643	6,08	▶ 7116	*
750	735	810	355	547	675	6,52	▶ 7117	*

Packing Unit: 4 sets per box

▶ prompt delivery * minimum order quantity and lead time on request!

FR 712 CS

LOCKING SYSTEM




stainless locking catch to hold drawer shut

MATERIAL:

stainless steel

**SPECIFICATIONS:**

- ▶ A positive locking device with a compression spring
- ▶ CS lock pin

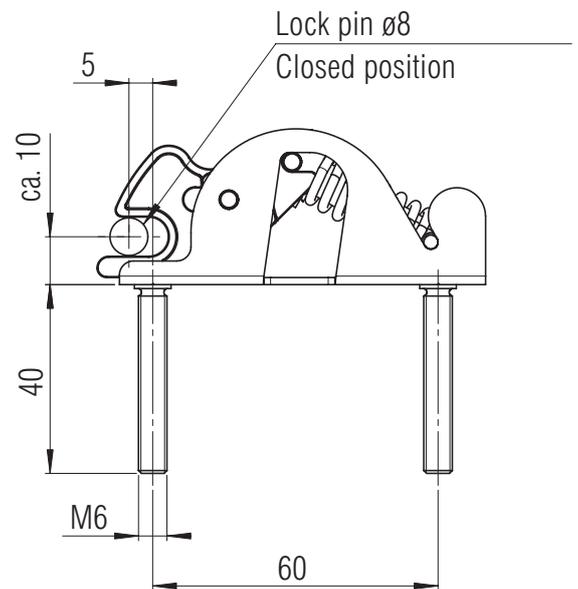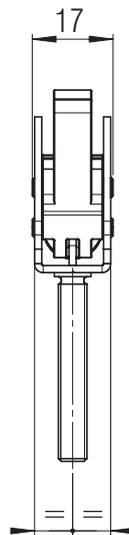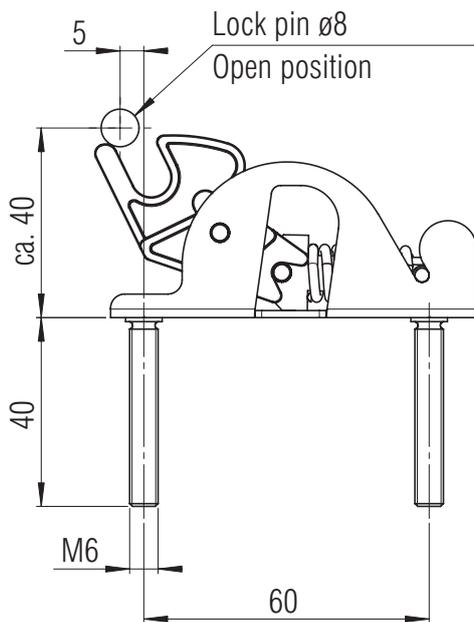**Type****Order No.****Locking System**

▶ 6100067

Packing Unit: 1 piece

▶ prompt delivery

Fulterer

FR 7180

SLIDE TYPE:	Full-Extension Drawer Slide - Progressive-Action
MOUNTING:	Bottom Mount

WIDTH:	24 mm
LOAD CAPACITY:	dynamic up to 200 kg (full-ext.)




MATERIAL:	steel, galvanized or lightgrey powdercoated
------------------	---

FEATURES:	solid delrin* rollers
------------------	-----------------------

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ cabinet and drawer profile with screw holes ▶ high lateral stability through specially formed middle profile and guide rollers ▶ ideal running characteristic and smoothness of running ▶ safety clip mounted in middle profile ▶ double-sided captive profile ▶ self-closing
<p>① compatible with regular-extension drawer slide FR 115 and FR 215</p>

*DuPont (TM) Delrin®

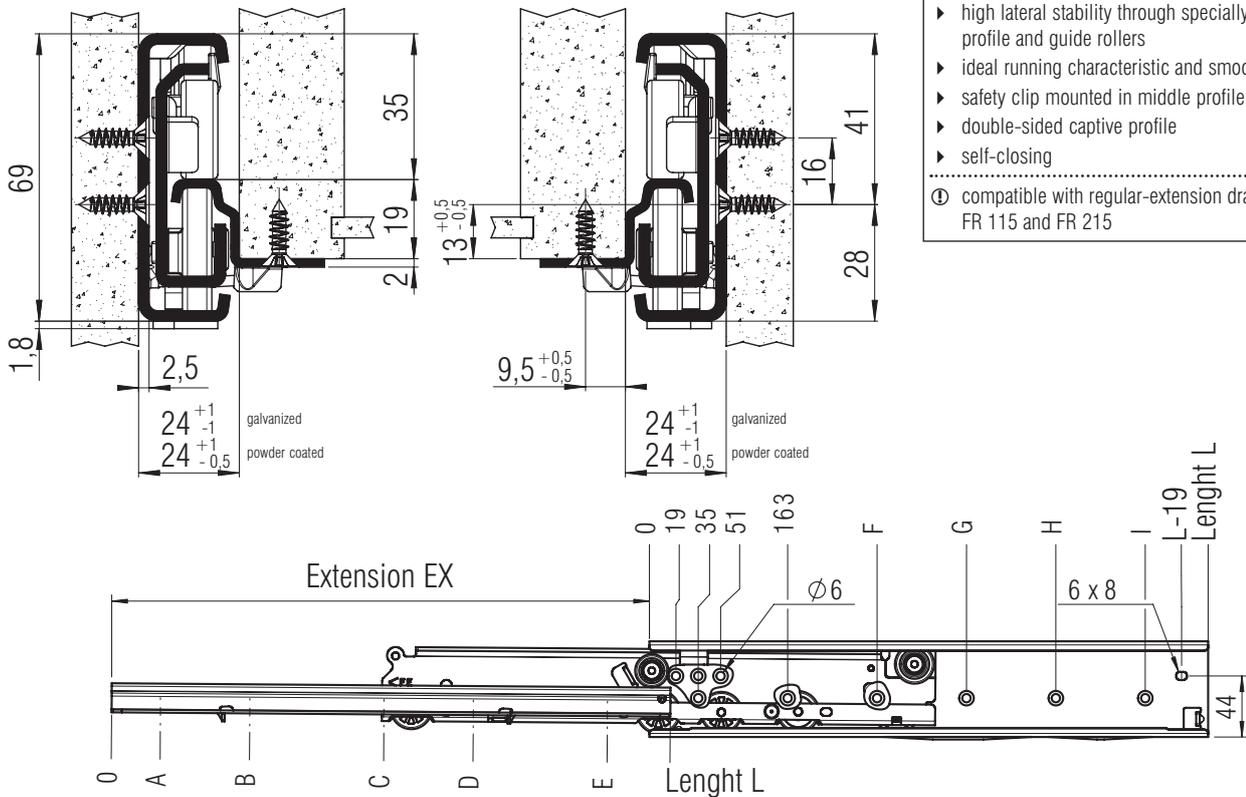

screw holes for 4,5 mm spax screws

L mm	EX full-ext.	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Weight per pair (kg)	Order No. galvanized	Order No. lightgrey
400	385	46	238	366			323	387			3,64	▶ 7150	*
450	435	32	288	416			355	419			4,11	▶ 7151	*
500	485	50	146	370	466		291	451			4,57	▶ 7152	*
550	535	36	196	420	516		323	483			5,04	▶ 7153	*
600	585	22	246	438	566		355	547			5,50	▶ 7154	*
650	635	40	296	488	616		355	611			5,97	▶ 7155	*
700	685	26	186	346	538	666	355	515	643		6,43	▶ 7156	*
750	735	44	204	396	588	716	355	547	675		6,90	▶ 7157	*
800	785	30	190	446	638	766	355	611	739		7,36	▶ 7158	*
850	835	48	240	464	688	816	355	611	771		7,83	▶ 7159	*
900	885	34	290	578	738	866	355	611	835		8,29	▶ 7160	*
950	935	20	340	628	788	916	355	611	771	899	8,76	▶ 7161	*
1000	985	38	390	646	838	966	355	643	771	931	9,22	▶ 7162	▶ 7182

Packing Unit: 400-600 mm: 4 sets per box; 650-1000 mm: 2 sets per box

▶ prompt delivery *on request

FR 771

TYPE:	Progressive action full-extension pantry pull out slide with top slide
MOUNTING:	Bottom Mount

WIDTH:	min. 108 mm min. 110 mm (ECD)
LOAD:	dynamic up to 120 kg


ECD



MATERIAL:	steel, white powder coated
------------------	----------------------------

FEATURES:	solid delrin* rollers, delrin*-encased steel ball bearings
------------------	--

SPECIFICATIONS:	<ul style="list-style-type: none"> ▶ deflection in extended and loaded position maximum 5mm ▶ quick and easy installation through unique system ▶ optimum and quiet movement, even under heaviest loads ▶ integrated lateral and height adjustment ▶ top slide for absolute lateral stability ▶ LGA-tested according to DIN 4554 standard at 50,000 cycles ▶ simple assembly of the pullout unit via countersunk fixing holes for M6 countersunk screws <p>ⓘ Do not lubricate the slide anywhere!</p> <p>🆕 NEW - Easy Close System FR 771 ECD option</p>
------------------------	---

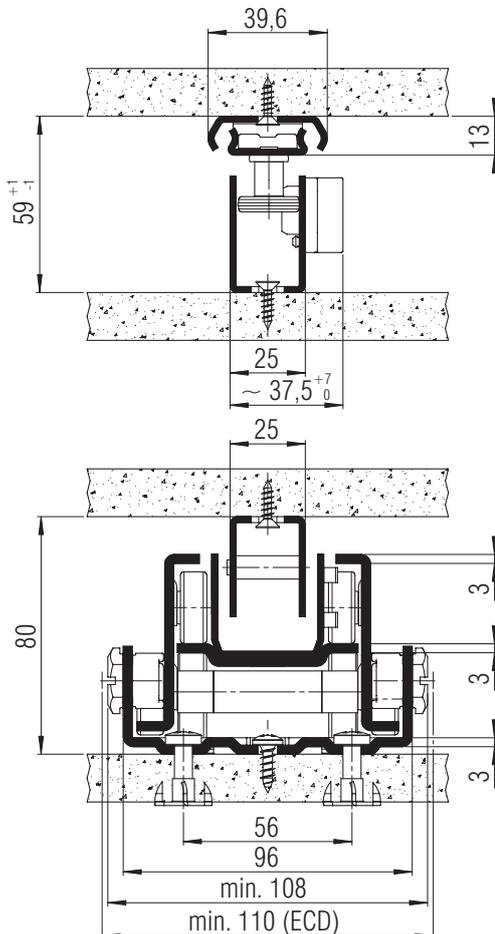

L mm	Weight per set (kg)	Order No.
400	5,35	*
450	5,95	*
500	6,75	*
550	7,35	*
600	7,95	*
650	8,55	*
700	9,15	*
750	9,75	*

Packing Unit:
1 set per box * on request



Fulterer

*Dufren (TM) Delrin®

FR 771

TYPE:	Progressive action full-extension pantry pull out slide with top slide
MOUNTING:	Bottom Mount

WIDTH:	min. 108 mm min. 110 mm (ECD)
LOAD:	dynamic up to 120 kg

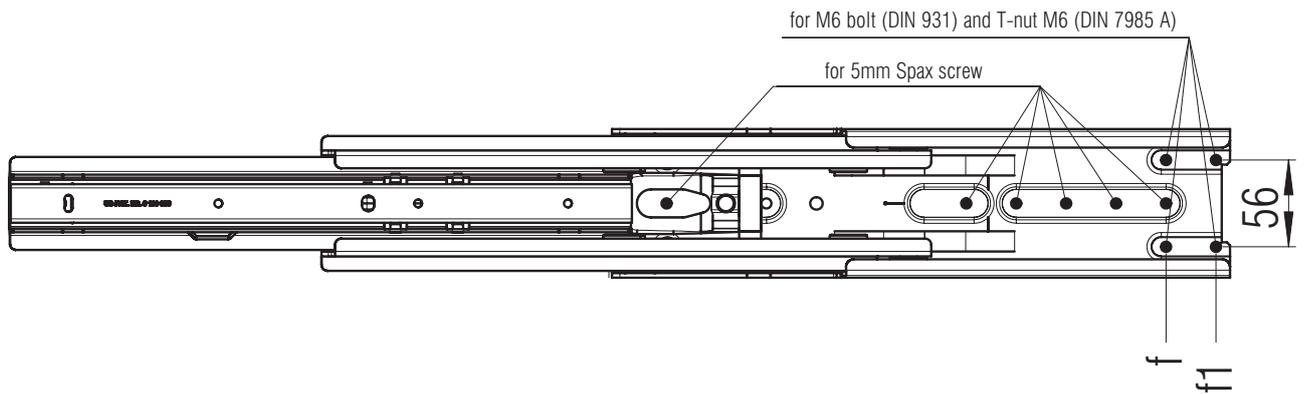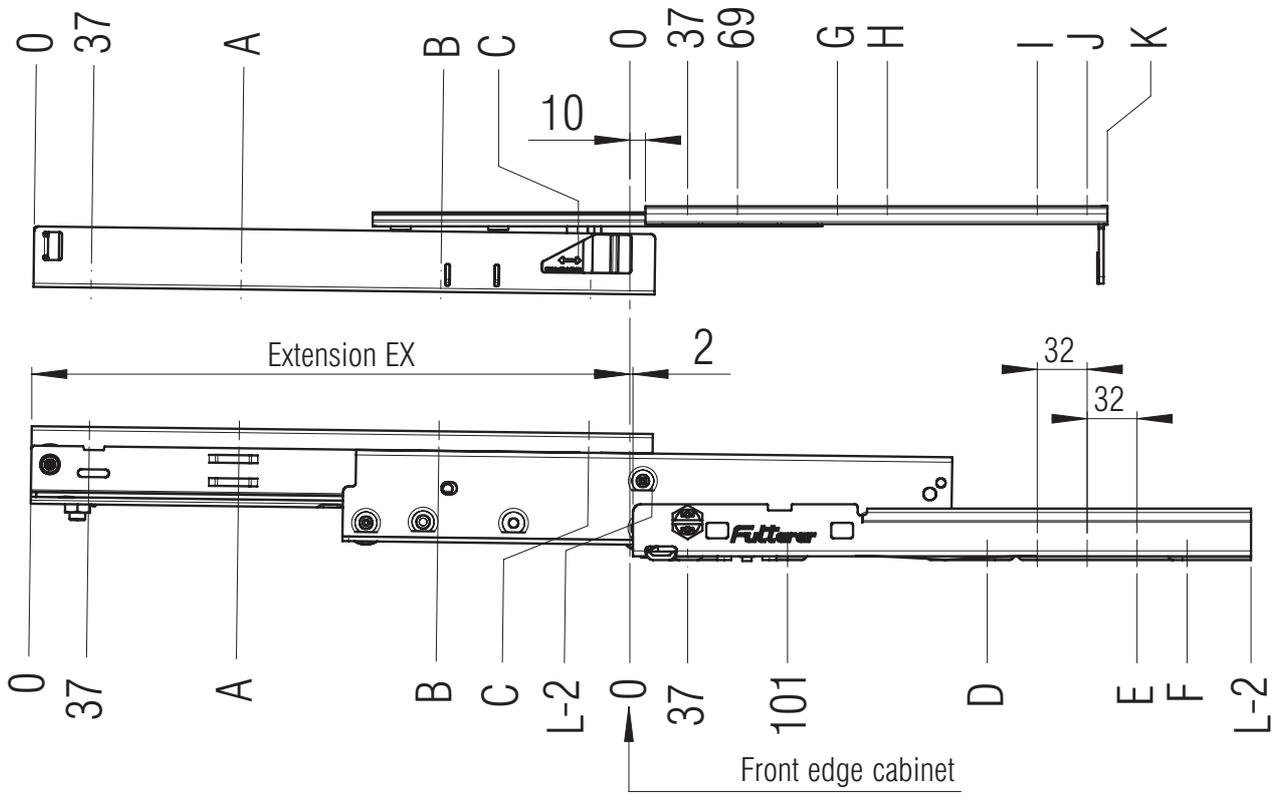

unmarked holes for 4mm (US #6) countersunk screws


L mm	EX mm	A mm	B mm	C mm	D mm	E mm	F mm	f mm	f1 mm	G mm	H mm	I mm	J mm	K mm
400	384	133	261	357	229	357	-	389	-	133	165	261	293	306
450	434	133	261	421	229	389	421	421	-	133	165	261	293	306
500	484	165	325	453	261	421	453	453	485	197	229	357	389	402
550	534	197	357	517	293	485	517	517	-	197	229	357	389	402
600	584	197	389	549	325	517	549	549	581	197	229	357	389	402
650	634	229	421	613	357	549	581	581	613	197	229	357	389	402
700	684	261	485	645	357	613	645	645	677	197	229	357	389	402
750	734	261	485	709	389	645	677	677	709	197	229	357	389	402

FR 775

SLIDE TYPE:	Progressive action full-extension pantry pull out slide with top slide
MOUNTING:	Bottom Mount

WIDTH:	min. 88,5 mm
LOAD CAPACITY:	dynamic up to 75 kg

ECD


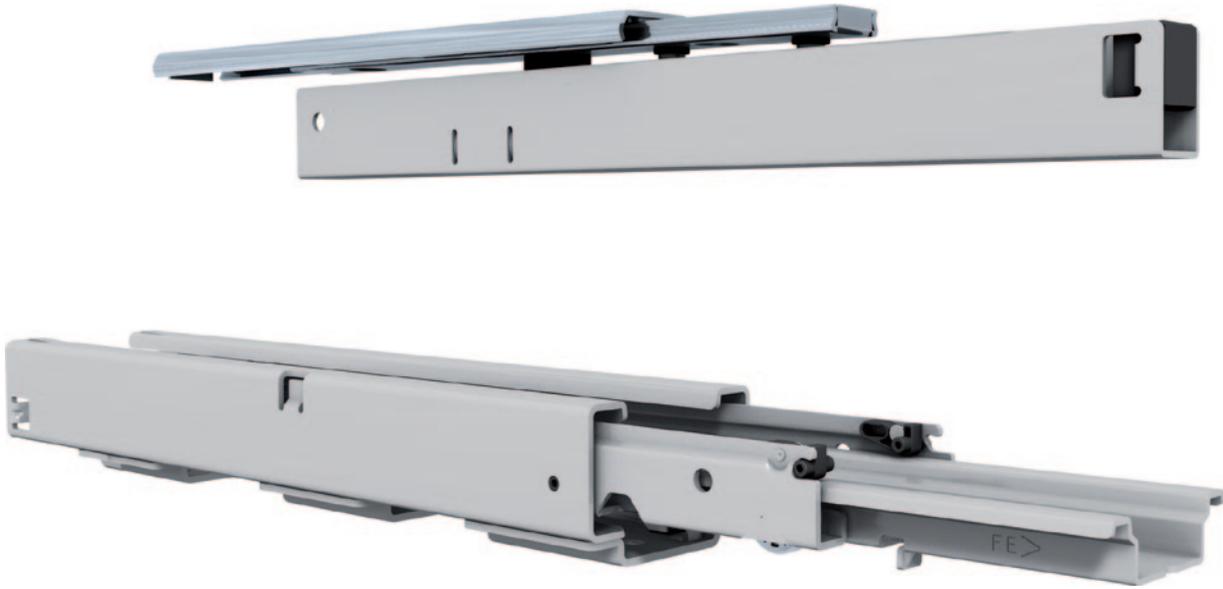


MATERIAL:	steel, powder coated
------------------	----------------------

FEATURES:	delrin* - encased steel ball bearings
------------------	---------------------------------------

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ quick and easy installation through patented system ▶ optimum and quiet movement ▶ integrated lateral and height adjustment ▶ top slide for absolute lateral stability <hr/> <ul style="list-style-type: none"> Ⓜ Do not lubricate the slide anywhere! Ⓜ Recommended maximal cabinet height: 1500mm <hr/> <ul style="list-style-type: none"> Ⓜ Easy Close Device (ECD) option

*DuPont (TM) Delrin®

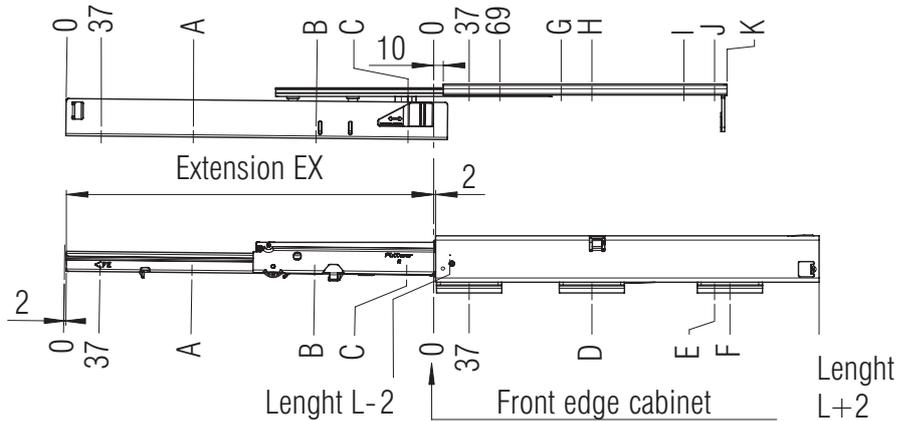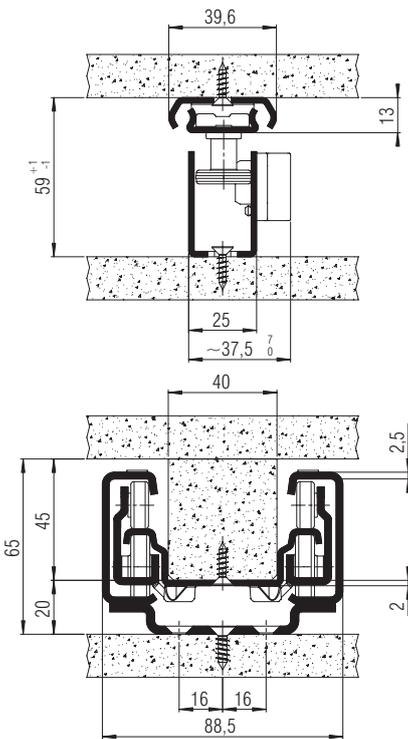

screw holes for 4,0 mm and 5,0 mm spax screws

L mm	EX mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	J mm	K mm	Weight per set (kg)	Order No. white
400	385	133	261	357	-	293	-	133	165	261	293	306	4,25	*
430	415	133	261	389	-	-	325	133	165	261	293	306	4,52	*
450	435	133	261	421	-	-	357	133	165	261	293	306	4,70	*
480	465	165	325	453	-	-	389	197	229	357	389	402	5,17	*
500	485	165	325	453	-	-	389	197	229	357	389	402	5,35	*
550	535	197	357	517	-	-	453	197	229	357	389	402	5,80	*
600	585	197	389	549	229	-	485	197	229	357	389	402	6,40	*
650	635	229	421	613	261	-	549	197	229	357	389	402	6,85	*
700	685	261	485	645	293	-	581	197	229	357	389	402	7,30	*
750	735	261	485	709	325	-	645	197	229	357	389	402	7,75	*

Packing Unit: **1 set per box**

* on request


Fulterer

FR 777

SLIDE TYPE:	Progressive action full-extension pantry pull out slide with top slide
MOUNTING:	Bottom Mount

MEASURES:	min. 124 mm min. 158 mm (ECD)
CAPACITY:	dynamic up to 200 kg


ECD

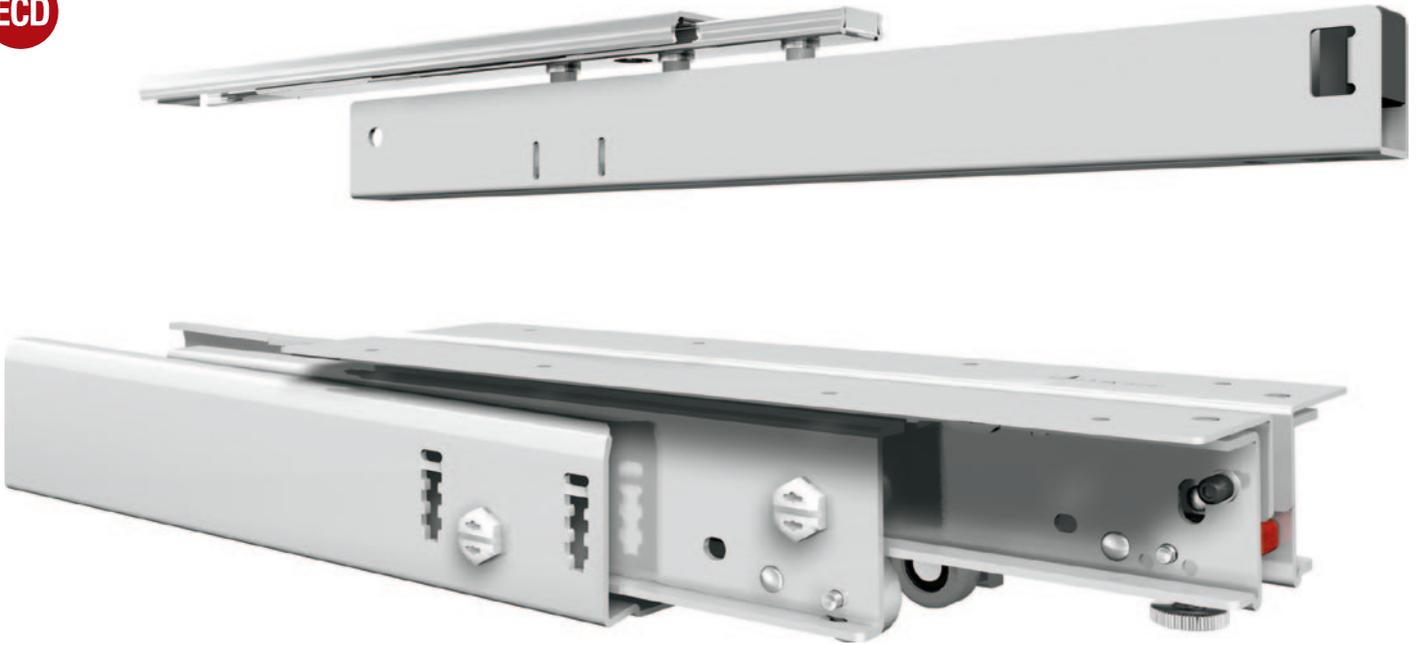

MATERIAL:	steel, white powder coated
------------------	----------------------------

FEATURES:	solid delrin* rollers, delrin*-encased steel ball bearings
------------------	--

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ no deflection in fully extended position ▶ quick and easy installation through unique system ▶ optimum and quiet movement, even under heaviest loads ▶ integrated lateral and height adjustment ▶ top slide for absolute lateral stability ▶ LGA-tested according to DIN 4554 standard at 50,000 cycles ▶ simple assembly of the pullout unit via countersunk fixing holes for M6 countersunk screws
<p>ⓘ Do not lubricate the slide anywhere!</p> <p>Ⓜ Easy Close System FR 777 ECD option</p>

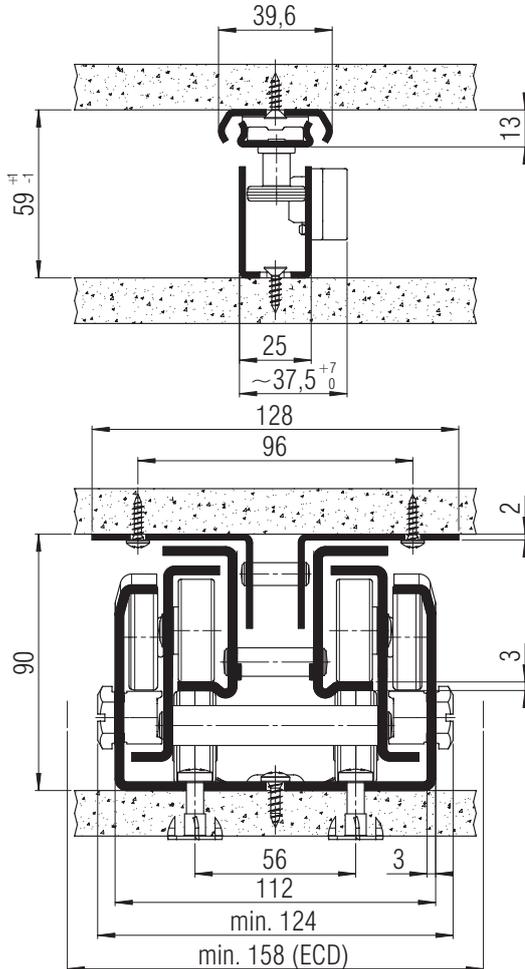



L mm	Weight per set (kg)	Order No.
400	8,70	▶ 7720
450	9,65	▶ 7721
500	10,80	▶ 7722
550	11,75	▶ 7723
600	12,70	▶ 7724
650	13,65	▶ 7725
700	14,60	▶ 7726
750	15,55	▶ 7727
800	16,50	▶ 7728
850	17,45	▶ 7729
900	18,40	▶ 7730
950	19,35	▶ 7731
1000	20,30	▶ 7732
1100	22,20	▶ 7733

Packing Unit:	▶ prompt delivery
1 set per box	

FR 777

SLIDE TYPE:	Progressive action full-extension pantry pull out slide with top slide
MOUNTING:	Bottom Mount

MEASURES:	min. 124 mm min. 158 mm (ECD)
CAPACITY:	dynamic up to 200 kg

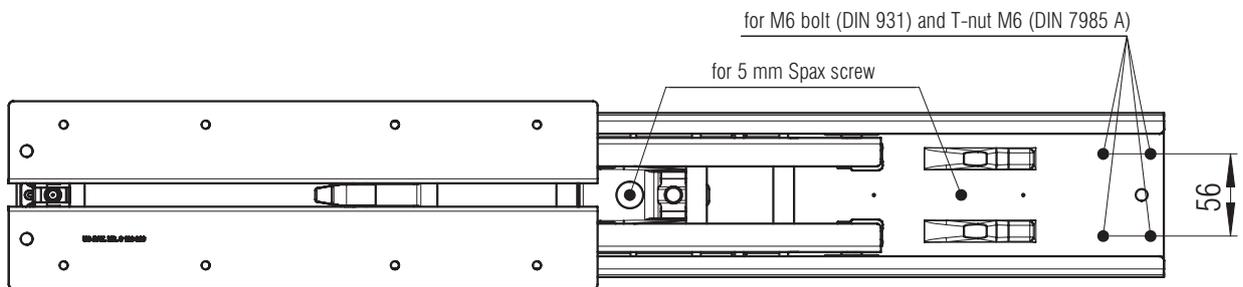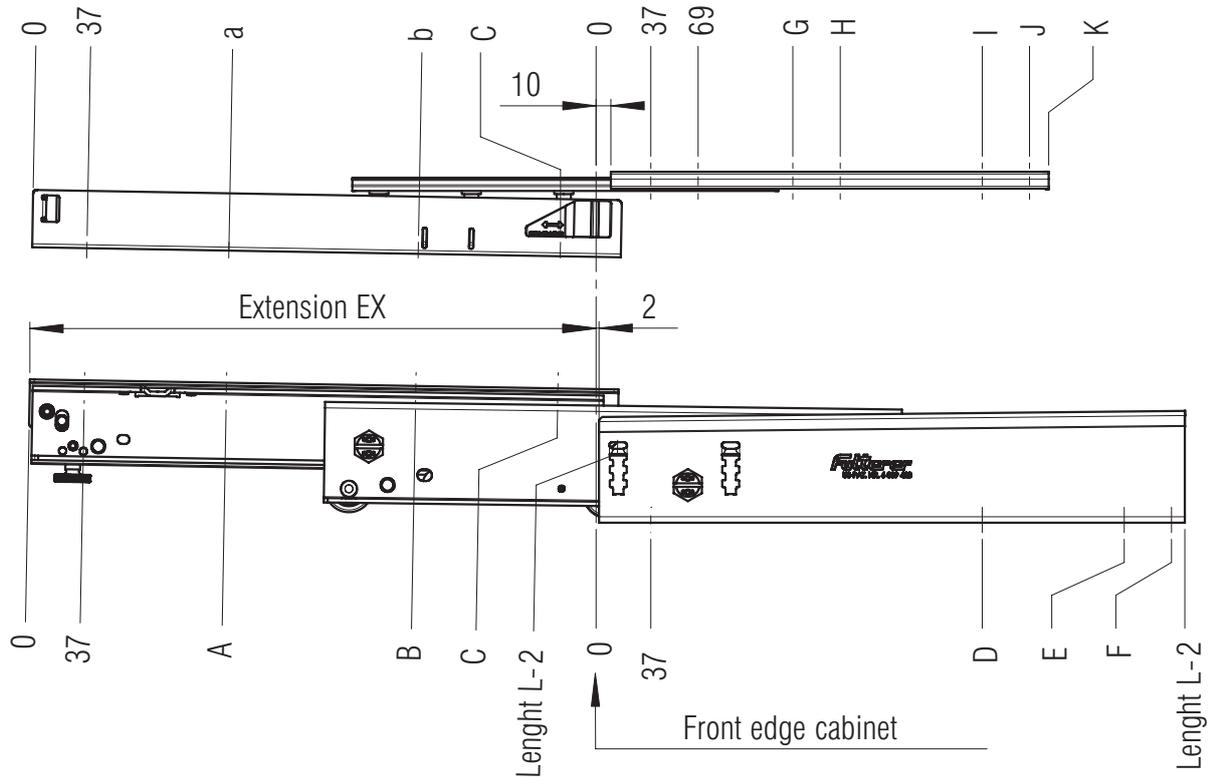


unmarked holes for 4mm (US #6) countersunk screws

L mm	EX mm	A mm	a mm	B mm	b mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	J mm	K mm
400	384	133	133	261	261	357	-	357	389	133	165	261	293	306
450	434	133	133	261	261	421	-	389	421	133	165	261	293	306
500	484	165	165	325	325	453	-	421	453	197	229	357	389	402
550	534	197	197	357	357	517	-	485	517	197	229	357	389	402
600	584	197	197	389	357	549	-	517	549	197	229	357	389	402
650	634	229	229	421	421	613	-	581	613	197	229	357	389	402
700	684	261	261	485	485	645	549	613	645	197	229	357	389	402
750	734	261	261	485	485	709	581	677	709	197	229	357	389	402
800	784	293	293	549	549	773	645	741	773	197	229	357	389	402
850	834	293	293	549	549	805	677	773	805	197	229	357	389	402
900	884	325	325	581	581	869	709	837	869	197	229	357	389	402
950	934	325	325	613	613	901	741	869	901	197	229	357	389	402
1000	984	325	325	645	645	965	773	933	965	197	229	357	389	402
1100	1084	389	357	741	741	1061	869	1029	1061	197	229	357	389	402

FR 777

SLIDE TYPE:	Progressive action full-extension pantry pull out unit with top slide
MOUNTING:	Bottom Mount

MEASURES:	min. 124 mm min. 158 mm (ECD)
CAPACITY:	dynamic up to 200 kg

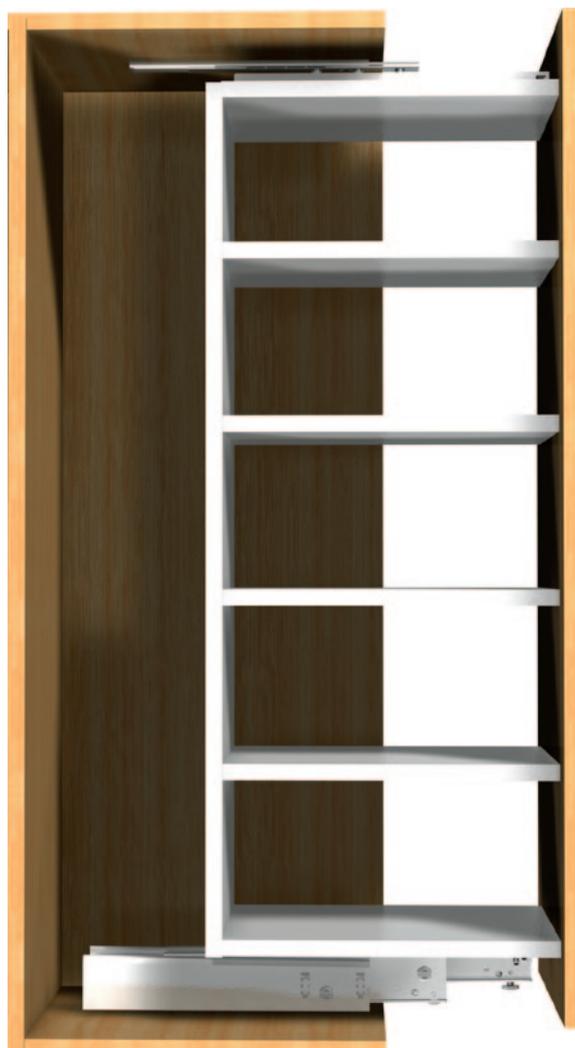


FR 777 ECD

EASY-CLOSE SYSTEM

Sliding absorption system
Upgrade set for pantry pull out
slide FR 777

MATERIAL:

Plastic, steel

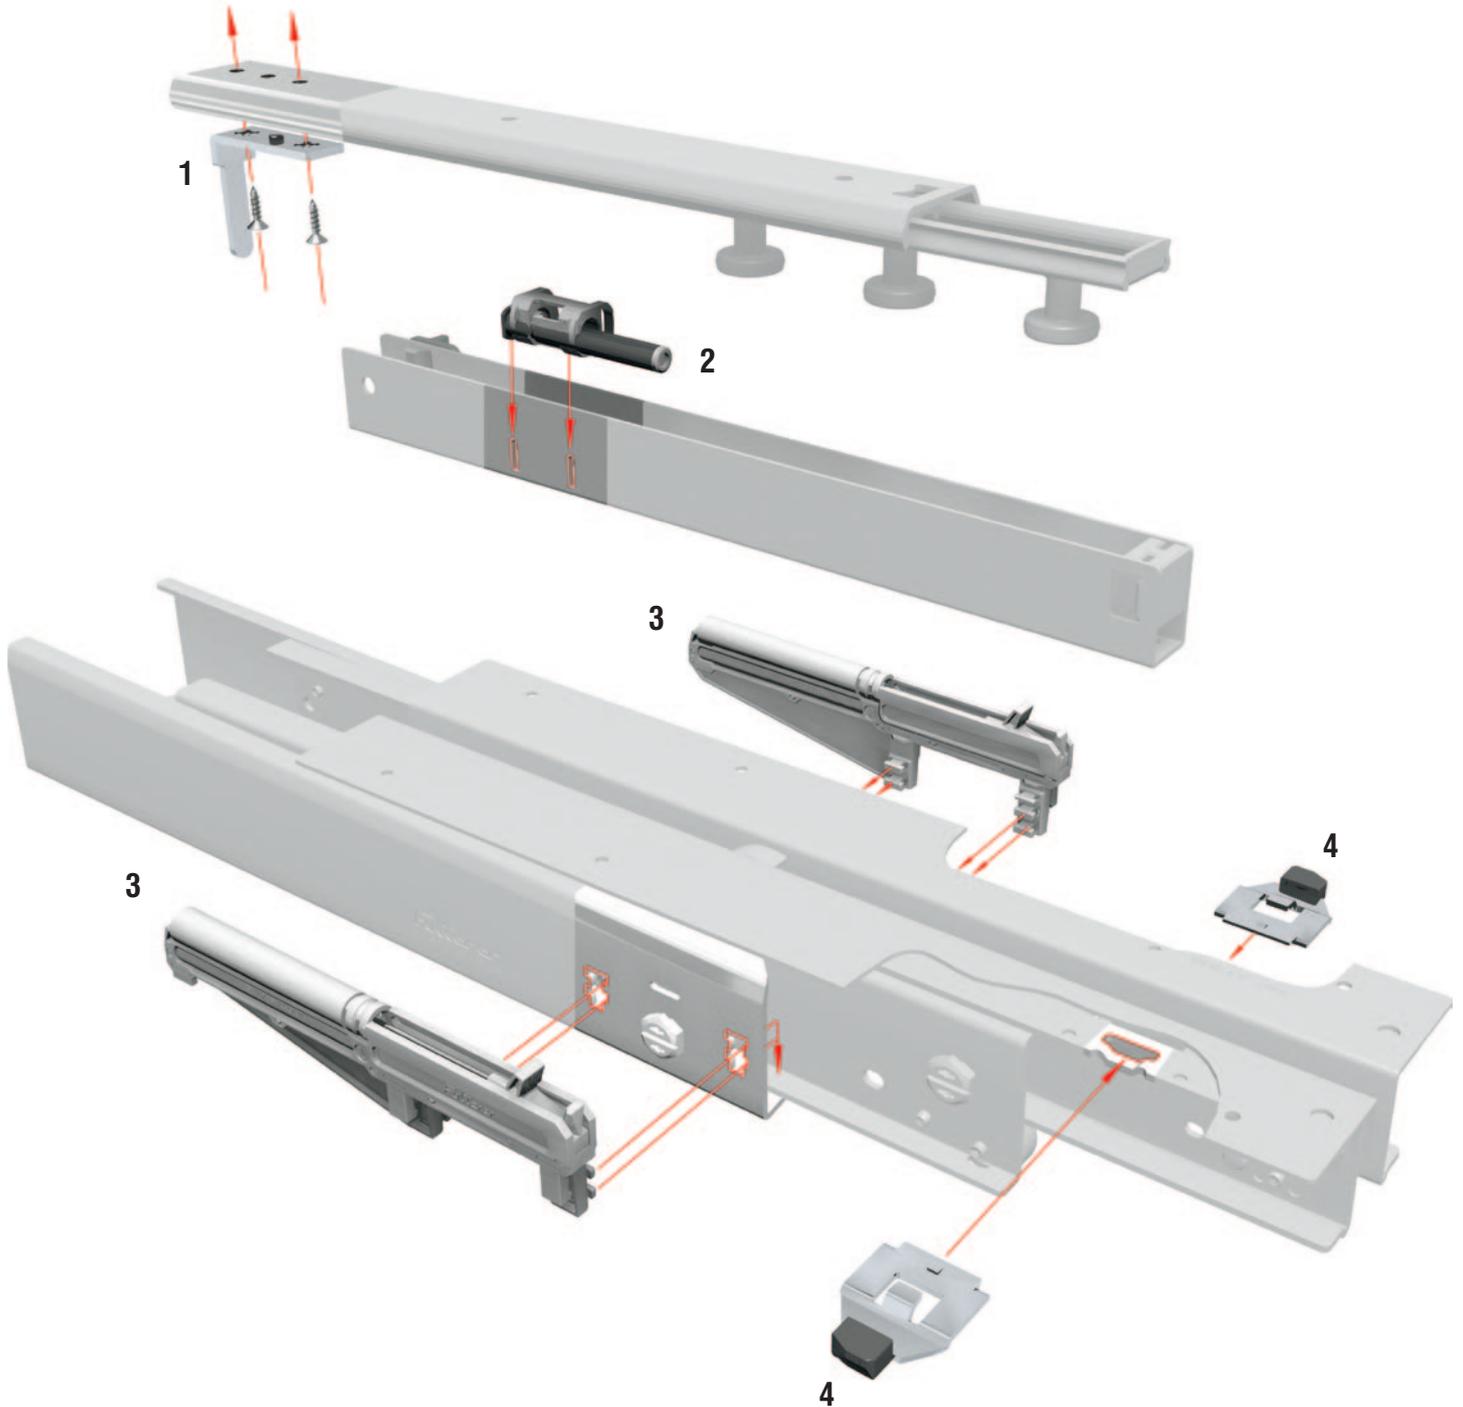

DELIVERY SPECIFICATIONS:

top slide:

- 1 x Strike, screw mounted
2 x Screw
- 1 x Dampening Cylinder, snap-on

bottom slide:

- 2 x Easy Close Dampening Cylinder, snap-on
 - 2 x Follower, snap-on
- assembly instructions

ASSEMBLY:

- ▶ **top slide:**
assemble 1 and 2 as illustrated
- ▶ **bottom slide:**
snap 3 and 4 into place as illustrated

FUNCTION:

- ▶ the easy close automatic/self-closing and slam-resistant function is not compromised by varying load conditions
- ▶ During the last 75 mm of the closing motion the pull-out is decelerated and then softly pulled closed all the way.
- ▶ no pinching of fingers
- ▶ no contents falling over, etc.

Designation

FR 777 ECS – Upgrade set for pantry pull out unit FR 777

Packing Unit: 1 set per polybag

Order No.

▶ 3430

▶ prompt delivery

Fulterer

FR 785 CS



SLIDE TYPE:	Progressive-Action Full-Extension Drawer Slide
MOUNTING:	Side Mount

WIDTH:	18 mm
LOAD CAPACITY:	dynamic up to 60 kg (full-ext.) dynamic up to 48 kg (over-ext.)

	ORDER OPTIONALLY
	SM-021 Easy Close Device
	Order No.: ▶ 82503
	Packing Unit: 1 set per polybag





MATERIAL:	stainless steel
------------------	-----------------

FEATURES:	solid delrin* rollers
------------------	-----------------------

SPECIFICATIONS & NOTES:

- ▶ cabinet and drawer profile with screw holes
 - ▶ high lateral stability through specially formed middle profile (material thickness 2 mm) and guide rollers
 - ▶ ideal running characteristic and smoothness of running through integrated progressive-action
 - ▶ safety clip mounted in middle profile
 - ▶ double-sided captive profile
 - ▶ self closing, soft stop
-
- ① compatible with regular-extension drawer slide FR 1052 CS
 - ② also available with 60 mm over-extension
 - ③ also available with **Easy Close Device (ECD)**
 - ④ on request, also available as heat resistant model (up to 110° C) – load capacity 45 kg (full-ext.), 35 kg (over-ext.)

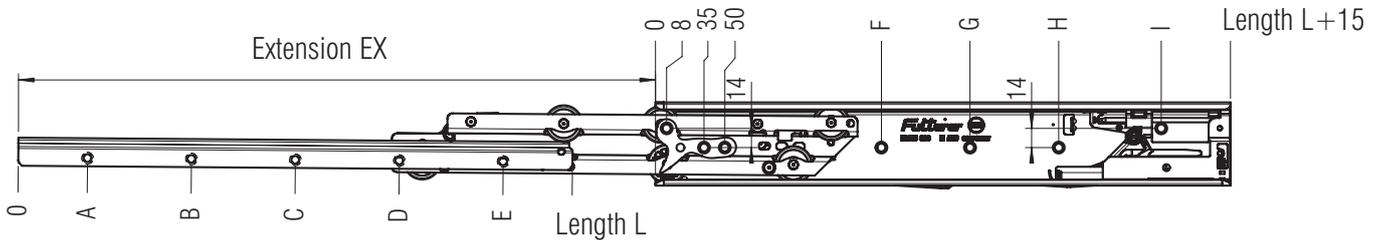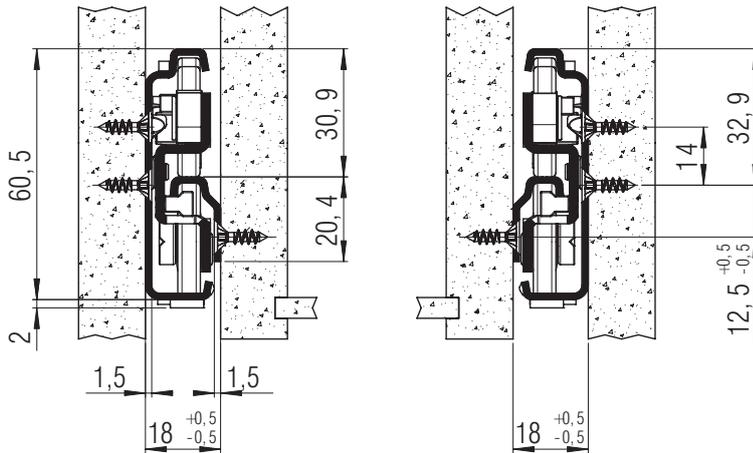

screw holes for 3,5 mm spax screws

L mm	EX full-ext.	EX over-ext.	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Weight per pair (kg)	Order No. full-ext.	Order No. over-ext.
335	320	395	28	156	316			163			315	*	*	*
350	335	410	28	156	316			163			315	*	▶ 8522	*
385	370	445	28	156	348			163			350	*	*	*
400	385	460	28	156	380			163			365	*	▶ 8524	*
435	420	495	28	156	316	412		163	323		400	*	*	*
450	435	510	28	156	316	412		163	355		415	*	▶ 8526	*
485	470	545	28	156	348	444		163	355		450	*	*	*
500	485	560	28	156	348	476		163	355		465	*	▶ 8528	*
535	520	595	28	156	348	508		163	355		500	*	*	*
550	535	610	28	156	348	508		163	355		515	*	▶ 8530	*
585	570	645	28	156	348	540		195	355		550	*	*	*
600	585	660	28	156	348	572		195	355		565	*	▶ 8532	*
635	620	695	28	156	348	604		163	355	547	600	*	*	*
650	635	710	28	156	348	604		163	355	547	615	*	▶ 8534	*
685	670	745	28	156	348	540	668	163	355	547	650	*	*	*
700	685	760	28	156	348	540	668	163	355	547	665	*	▶ 8536	*
735	720	795	28	156	348	572	700	163	355	547	700	*	*	*
750	735	810	28	156	348	572	732	163	355	547	715	*	*	*

Packing Unit: **5 sets per box**

▶ prompt delivery * on request

FR 785 CS ECD

SLIDE TYPE:	Progressive-Action Full-Extension Drawer Slide
MOUNTING:	Side Mount

WIDTH:	18 mm
LOAD CAPACITY:	dynamic up to 60 kg (full-ext.) dynamic up to 48 kg (over-ext.)

ECD





NSF

MATERIAL:	stainless steel
------------------	-----------------

FEATURES:	solid delrin* rollers
------------------	-----------------------

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ cabinet and drawer profile with screw holes ▶ high lateral stability through specially formed middle profile (material thickness 2 mm) and guide rollers ▶ ideal running characteristic and smoothness of running through integrated progressive-action ▶ safety clip mounted in middle profile ▶ double-sided captive profile
<ul style="list-style-type: none"> Easy Close Device (ECD) integrated
<ul style="list-style-type: none"> compatible with regular-extension drawer slide FR 1052 CS
<ul style="list-style-type: none"> also available with 60 mm over-extension

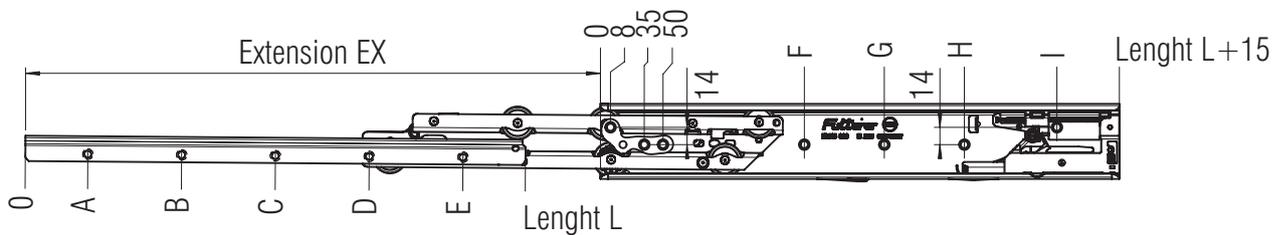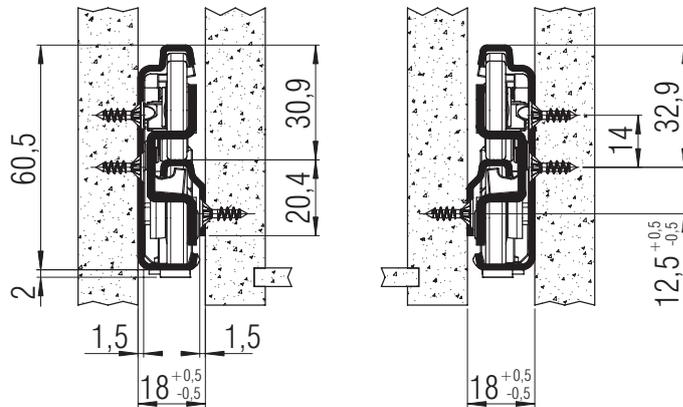

screw holes for 3,5 mm spax screws

L mm	EX full-ext.	EX over-ext.	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Weight per pair (kg)	Order No. full-ext.	Order No. over-ext.
335	320	395	28	156	316			163			300	*	*	*
350	335	410	28	156	316			163			315	*	▶ 8122	*
385	370	445	28	156	348			163			350	*	*	*
400	385	460	28	156	380			163			365	*	▶ 8124	*
435	420	495	28	156	316	412		163	323		400	*	*	*
450	435	510	28	156	316	412		163	355		415	*	▶ 8126	*
485	470	545	28	156	348	444		163	355		450	*	*	*
500	485	560	28	156	348	476		163	355		465	*	▶ 8128	*
535	520	595	28	156	348	508		163	355		500	*	*	*
550	535	610	28	156	348	508		163	355		515	*	▶ 8130	▶ 8150
585	570	645	28	156	348	540		195	355		550	*	*	*
600	585	660	28	156	348	572		195	355		565	*	▶ 8132	▶ 8154
635	620	695	28	156	348	604		163	355	547	600	*	*	*
650	635	710	28	156	348	604		163	355	547	615	*	▶ 8134	*
685	670	745	28	156	348	540	668	163	355	547	650	*	*	*
700	685	760	28	156	348	540	668	163	355	547	665	*	▶ 8136	*
735	720	795	28	156	348	572	700	163	355	547	700	*	*	*
750	735	810	28	156	348	572	732	163	355	547	715	*	*	*

Packing Unit: on request

▶ prompt delivery * on request

Fulterer

*DuPont (TM) Delrin®

FR 785 CS-AC

SLIDE TYPE:	Full-Extension Drawer Slide - Progressive-Action
MOUNTING:	Side Mount



WIDTH:	18 mm
LOAD CAPACITY:	dynamic up to 60 kg (full-ext.) dynamic up to 48 kg (over-ext.)



MATERIAL:	stainless steel
------------------	-----------------

FEATURES:	solid delrin* rollers
------------------	-----------------------

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ cabinet profile with bayonet mounting tabs ▶ drawer profile without screw holes ▶ high lateral stability through specially formed middle profile (material thickness 2 mm) and guide rollers ▶ ideal running characteristic and smoothness of running through integrated progressive-action ▶ safety clip mounted in middle profile ▶ double-sided captive profile ▶ self closing, soft stop <hr/> <p>① tool-less quick assembly of the cabinet profile</p> <p>① standard grid rail (see drawing)</p> <hr/> <p>⊕ also available with Easy Close Device (ECD)</p> <p>① on request, also available as heat resistant model (up to 110° C) – load capacity 45 kg (full-ext.), 35 kg (over-ext.)</p>

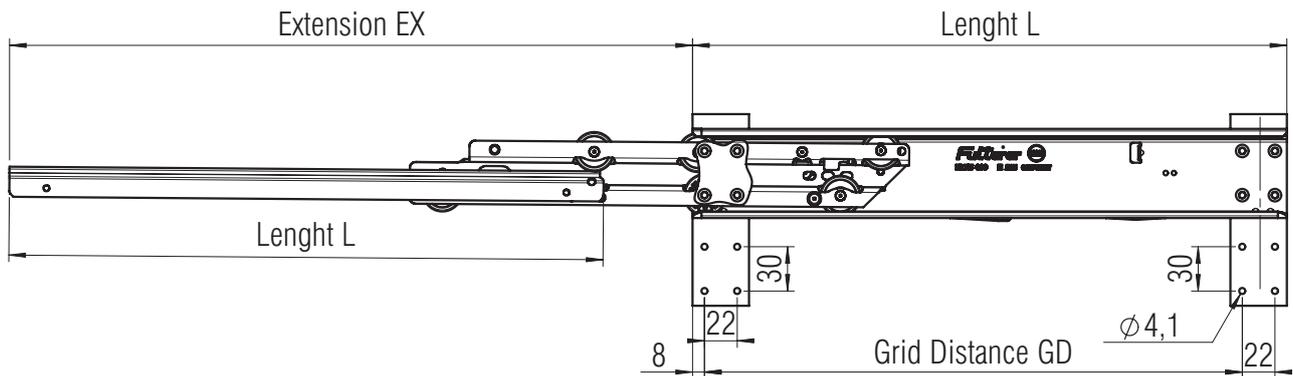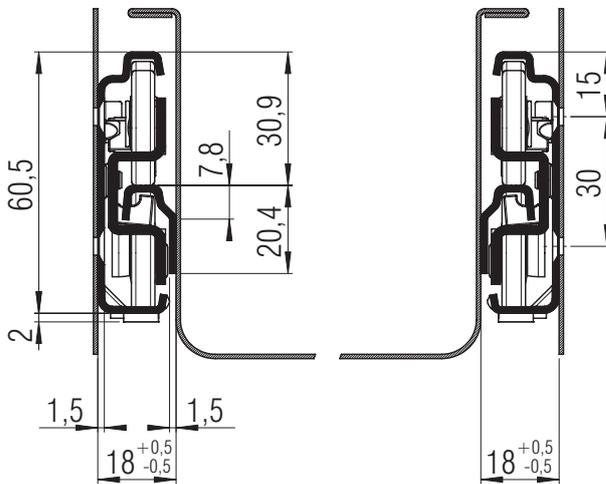

L mm	EX full-ext.	EX over-ext.	GD mm	Weight per pair (kg)	Order No. full-ext.	Order No. over-ext.
350	335	410	312	*	*	*
400	385	460	362	*	*	*
450	435	510	412	*	*	*
500	485	560	462	*	*	*
550	535	610	512	*	*	*
600	585	660	562	*	*	*
650	635	710	612	*	*	*
700	685	760	662	*	*	*
750	735	810	712	*	*	*

Packing Unit: on request

* on request

FR 785 CS-S

SLIDE TYPE:	Full-Extension Drawer Slide - Progressive-Action
MOUNTING:	Side Mount

WIDTH:	18 mm
LOAD CAPACITY:	dynamic up to 60 kg (full-ext.) dynamic up to 48 kg (over-ext.)



ECD



MATERIAL:	stainless steel
------------------	-----------------

FEATURES:	solid delrin* rollers
------------------	-----------------------

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ cabinet profile with bayonet mounting tabs ▶ drawer profile without screw holes ▶ high lateral stability through specially formed middle profile (material thickness 2 mm) and guide rollers ▶ ideal running characteristic and smoothness of running through integrated progressive-action ▶ safety clip mounted in middle profile ▶ double-sided captive profile ▶ self closing, soft stop <hr/> <ul style="list-style-type: none"> ① compatible with regular-extension drawer slide FR 1052 CS-S ① tool-less quick assembly of the cabinet profile ① standard grid rail (see drawing) <hr/> <ul style="list-style-type: none"> Ⓜ also available with Easy Close Device (ECD) ① on request, also available as heat resistant model (up to 110° C) – load capacity 45 kg (full-ext.), 35 kg (over-ext.)

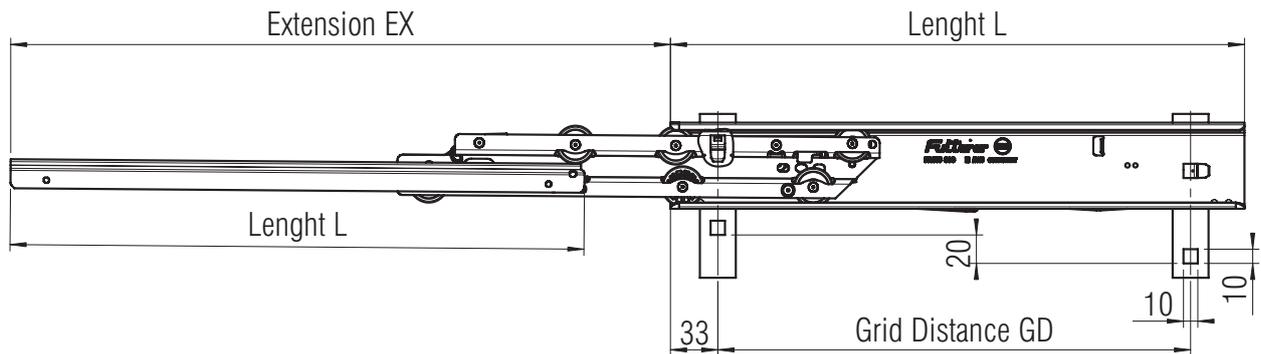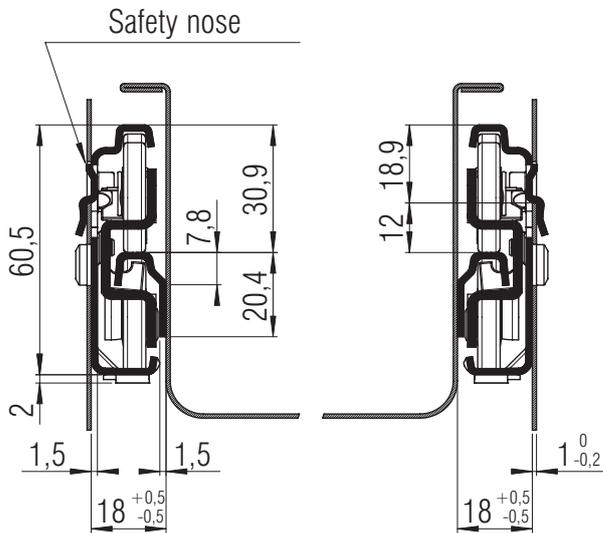

L mm	EX full-ext.	EX over-ext.	GD mm	Weight per pair (kg)	Order No. full-ext.	Order No. over-ext.
350	335	410	279,5	*	*	*
400	385	460	329,5	*	*	*
450	435	510	379,5	*	*	*
500	485	560	429,5	*	*	*
550	535	610	479,5	*	*	*
600	585	660	529,5	*	*	*
650	635	710	579,5	*	*	*
700	685	760	629,5	*	*	*
750	735	810	679,5	*	*	*

Packing Unit: **on request**

* **on request**

FR 785 CS-SC

SLIDE TYPE:	Full-Extension Drawer Slide - Progressive-Action
MOUNTING:	Side Mount



WIDTH:	18 mm
LOAD CAPACITY:	dynamic up to 60 kg (full-ext.) dynamic up to 48 kg (over-ext.)



MATERIAL:	stainless steel
------------------	-----------------

FEATURES:	solid delrin* rollers
------------------	-----------------------

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ cabinet profile with bayonet mounting tabs ▶ drawer profile without screw holes ▶ high lateral stability through specially formed middle profile (material thickness 2 mm) and guide rollers ▶ ideal running characteristic and smoothness of running through integrated progressive-action ▶ safety clip mounted in middle profile ▶ double-sided captive profile ▶ self closing, soft stop <hr/> <ul style="list-style-type: none"> ① compatible with regular-extension drawer slides FR 1052 CS-SC and FR 1052 SCC-SC ① tool-less quick assembly of the cabinet profile ① standard grid rail (see drawing) <hr/> <ul style="list-style-type: none"> Ⓜ also available with Easy Close Device (ECD) ① on request, also available as heat resistant model (up to 110° C) – load capacity 45 kg (full-ext.), 35 kg (over-ext.)

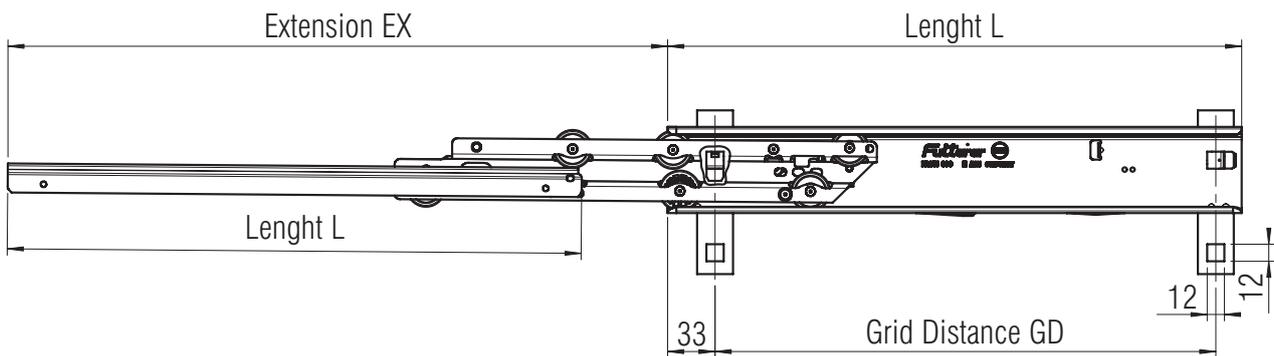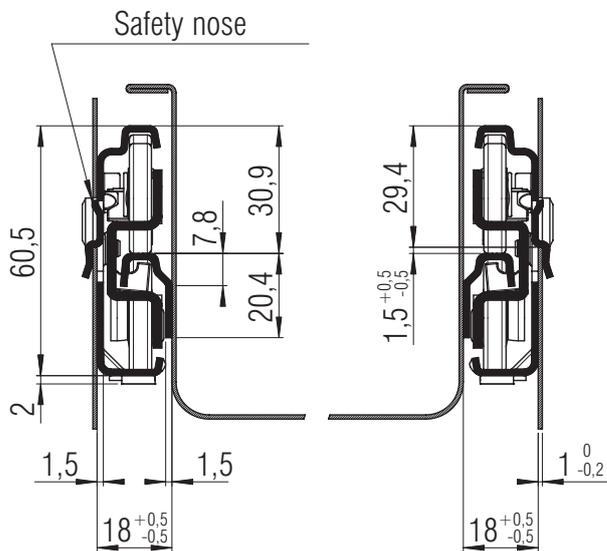

L mm	EX full-ext.	EX over-ext.	GD mm	Weight per pair (kg)	Order No. full-ext.	Order No. over-ext.
350	335	410	299	1,50	▶ 5351	*
400	385	460	349	1,74	▶ 5352	*
450	435	510	399	1,98	▶ 5353	*
500	485	560	449	2,22	▶ 5354	*
550	535	610	499	2,46	▶ 5355	*
600	585	660	549	2,70	▶ 5356	*
650	635	710	599	2,94	▶ 5357	*
700	685	760	649	3,18	▶ 5358	*
750	735	810	699	3,42	▶ 5359	*

Packing Unit: 4 sets per box

▶ prompt delivery

FR 785 CS-SC

SLIDE TYPE:	Progressive-Action Full-Extension Drawer Slide
MOUNTING:	Side Mount

WIDTH:	18 mm
LOAD CAPACITY:	dynamic up to 60 kg (full-ext.) dynamic up to 48 kg (over-ext.)



	ORDER OPTIONALLY
	SM-021 Easy Close Device
	Order No.: ▶ 82503
	Packing Unit: 1 set per polybag





MATERIAL:	stainless steel
------------------	-----------------

FEATURES:	solid delrin* rollers
------------------	-----------------------

SPECIFICATIONS & NOTES:

- ▶ cabinet profile with bayonet mounting tabs
 - ▶ drawer profile without screw holes
 - ▶ high lateral stability through specially formed middle profile (material thickness 2 mm) and guide rollers
 - ▶ ideal running characteristic and smoothness of running through integrated progressive-action
 - ▶ safety clip mounted in middle profile
 - ▶ double-sided captive profile
 - ▶ self closing, soft stop
-
- ① compatible with regular-extension drawer slides FR 1052 CS-SC and FR 1052 SCC-SC
 - ① tool-less quick assembly of the cabinet profile
 - ① standard grid rail (see drawing)
-
- ⊕ also available with **Easy Close Device (ECD)**
 - ① on request, also available as heat resistant model (up to 110° C) – load capacity 45 kg (full-ext.), 35 kg (over-ext.)

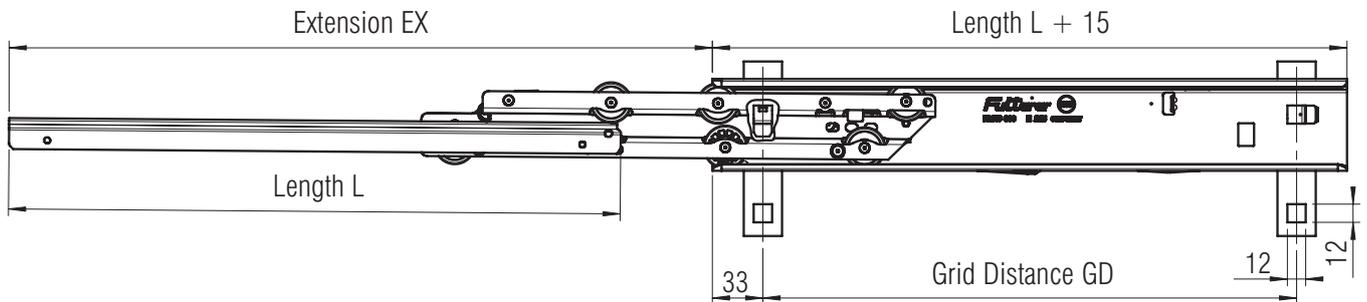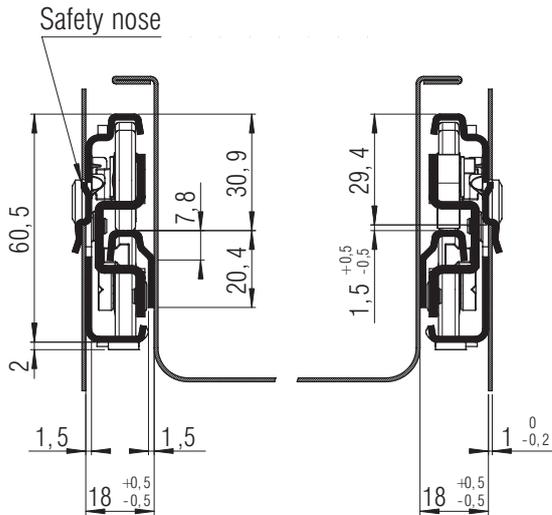

L mm	EX full-ext.	EX over-ext.	GD mm	Weight per pair (kg)	Order No. full-ext.	Order No. over-ext.
335	320	395	299	*	*	*
350	335	410	299	*	*	*
385	370	445	349	*	*	*
400	385	460	349	1,74	▶ 8324	*
435	420	495	399	*	*	*
450	435	510	399	1,98	▶ 8326	*
485	470	545	449	*	*	*
500	485	560	449	2,22	▶ 8328	*
535	520	595	499	*	*	*
550	535	610	499	2,46	▶ 8330	*
585	570	645	549	*	*	*
600	585	660	549	2,70	▶ 8332	*
635	620	695	599	*	*	*
650	635	710	599	*	*	*
685	670	745	649	*	*	*
700	685	760	649	*	*	*
735	720	795	699	*	*	*
750	735	810	699	*	*	*

Packing Unit: **5 sets per box**

▶ prompt delivery * on request

FR 785 ECD

SLIDE TYPE:	Full-Extension Drawer Slide - Progressive-Action
MOUNTING:	Side Mount

WIDTH:	18 mm
LOAD CAPACITY:	dynamic up to 55 kg (full-ext.) dynamic up to 40 kg (over-ext.)





MATERIAL:	steel, bright galvanized or white powder coated
------------------	---

FEATURES:	solid delrin* rollers
------------------	-----------------------

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ cabinet and drawer profile with screw holes ▶ high lateral stability through specially formed middle profile and guide rollers ▶ ideal running characteristic and smoothness of running through integrated progressive-action ▶ safety clip mounted in middle profile ▶ double-sided captive profile ▶ self-closing ▶ soft stop
<p>Easy Close Device (ECD) integrated</p> <p>① on request compatible regular-extension Drawer Slide is available</p> <p>① on request available with 60 mm over-extension</p>

*DuPont (TM) Delrin®

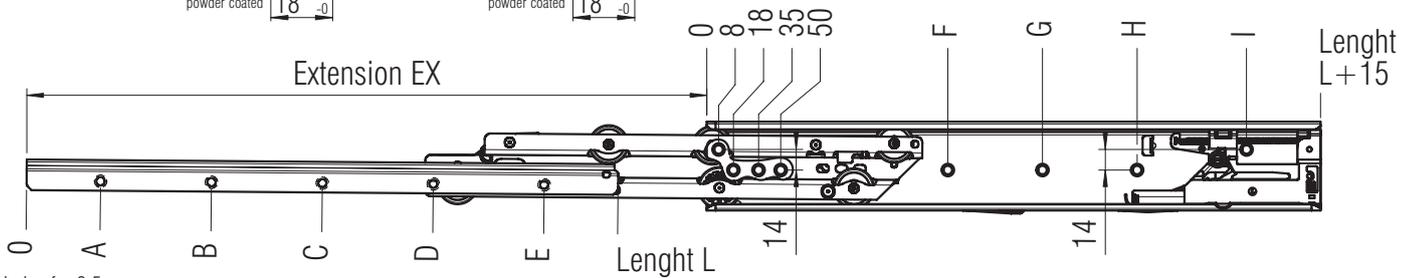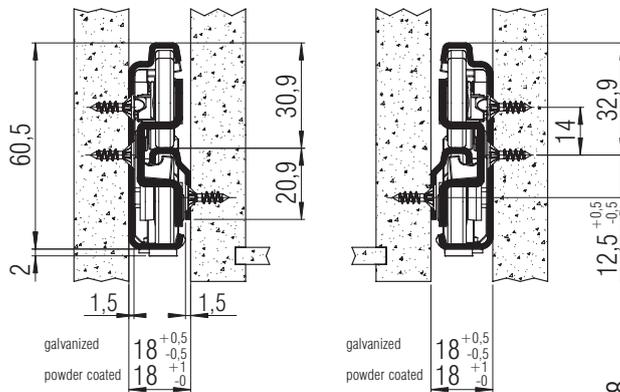

screw holes for 3,5 mm spax screws

L mm	EX full-ext.	EX over-ext.	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Weight per pair (kg)	Order No. full-ext. white
335	320	395	28	156	316			163			300	1,58	*
350	335	410	28	156	316			163			315	1,65	*
385	370	445	28	156	348			163			350	1,82	*
400	385	460	28	156	380			163			365	1,89	*
435	420	495	28	156	316	412		163	323		400	2,06	*
450	435	510	28	156	316	412		163	355		415	2,13	*
485	470	545	28	156	348	444		163	355		450	2,30	*
500	485	560	28	156	348	476		163	355		465	2,37	*
535	520	595	28	156	348	508		163	355		500	2,54	*
550	535	610	28	156	348	508		163	355		515	2,61	*
585	570	645	28	156	348	540		195	355		550	2,78	*
600	585	660	28	156	348	572		195	355		565	2,85	*
635	620	695	28	156	348	604		163	355	547	600	3,02	*
650	635	710	28	156	348	604		163	355	547	615	3,09	*
685	670	745	28	156	348	540	668	163	355	547	650	3,26	*
700	685	760	28	156	348	540	668	163	355	547	665	3,33	*
735	720	795	28	156	348	572	700	163	355	547	700	3,50	*
750	735	810	28	156	348	572	732	163	355	547	715	3,57	*

Packing Unit: 5 sets per box

* minimum order quantity and lead time on request!

FR 786 CS

SLIDE TYPE:	Full-Extension Drawer Slide - Progressive-Action
MOUNTING:	Bottom Mount

WIDTH:	18 mm
LOAD CAPACITY:	dynamic up to 60 kg (full-ext.) dynamic up to 48 kg (over-ext.)





MATERIAL:	stainless steel
------------------	-----------------

FEATURES:	solid delrin* rollers
------------------	-----------------------

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ cabinet and drawer profile with screw holes ▶ high lateral stability through specially formed middle profile (material thickness 2 mm) and guide rollers ▶ ideal running characteristic and smoothness of running through integrated progressive-action ▶ safety clip mounted in middle profile ▶ double-sided captive profile ▶ self closing, soft stop <hr/> <ul style="list-style-type: none"> ① compatible with regular-extension drawer slide FR 1052 CS ② also available with 60 mm over-extension ③ also available with Easy Close Device (ECD) ④ on request, also available as heat resistant model (up to 110° C) – load capacity 45 kg (full-ext.), 35 kg (over-ext.)

*DuPont (TM) Delrin®

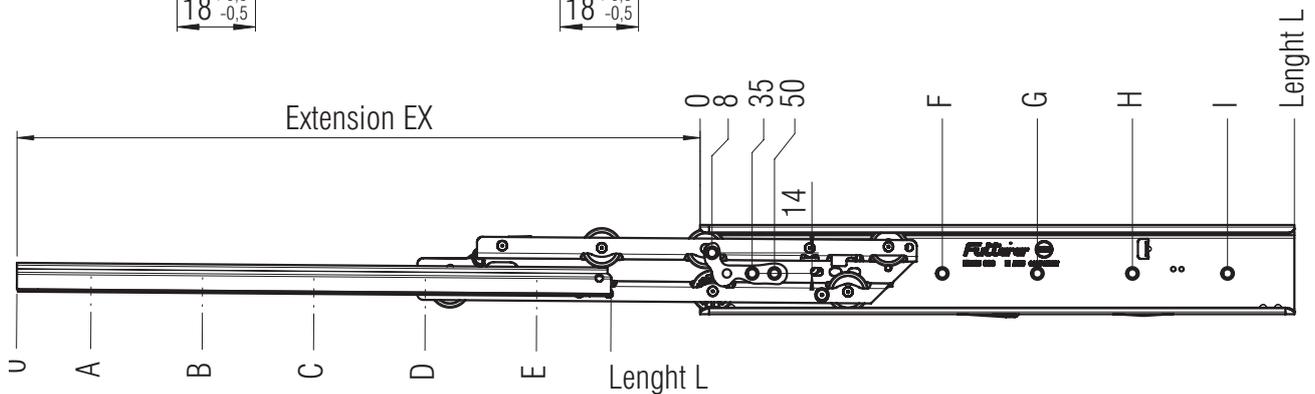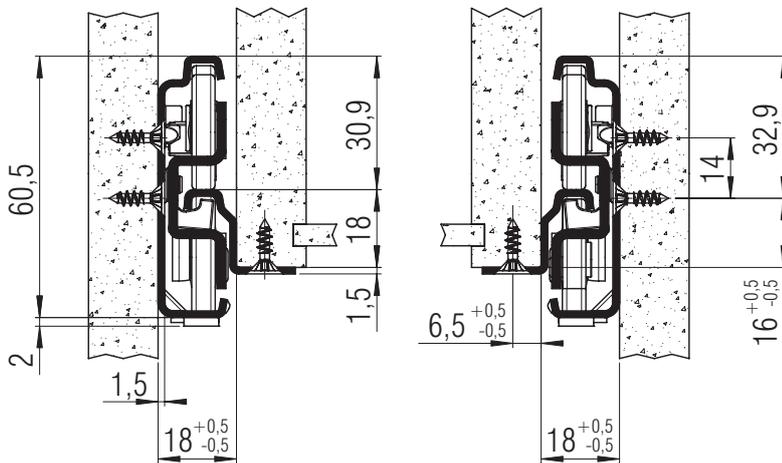

screw holes for 3,5 mm spax screws

L mm	EX full-ext.	EX over-ext.	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Weight per pair (kg)	Order No. full-ext.	Order No. over-ext.
350	335	410	28	156	316			163	291			*	*	*
400	385	460	28	156	380			163	355			*	*	*
450	435	510	28	156	316	412		163	355			*	*	*
500	485	560	28	156	348	476		163	355	451		*	*	*
550	535	610	28	156	348	508		163	355	483		*	*	*
600	585	660	28	156	348	572		195	355	547		*	*	*
650	635	710	28	156	348	604		163	355	547		*	*	*
700	685	760	28	156	348	540	668	163	355	547	643	*	*	*
750	735	810	28	156	348	572	732	163	355	547	643	*	*	*

Packing Unit: 5 sets per box

▶ prompt delivery * on request



FR 786 CS ECD

SLIDE TYPE:	Full-Extension Drawer Slide - Progressive-Action
MOUNTING:	Bottom Mount


WIDTH:	18 mm
LOAD CAPACITY:	dynamic up to 60 kg (full-ext.) dynamic up to 48 kg (over-ext.)



MATERIAL:	stainless steel
------------------	-----------------

FEATURES:	solid delrin* rollers
------------------	-----------------------

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ cabinet and drawer profile with screw holes ▶ high lateral stability through specially formed middle profile (material thickness 2 mm) and guide rollers ▶ ideal running characteristic and smoothness of running through integrated progressive-action ▶ safety clip mounted in middle profile ▶ double-sided captive profile ▶ Easy Close Device (ECD) integrated
<ul style="list-style-type: none"> ① compatible with regular-extension drawer slide FR 1052 CS ② also available with 60 mm over-extension

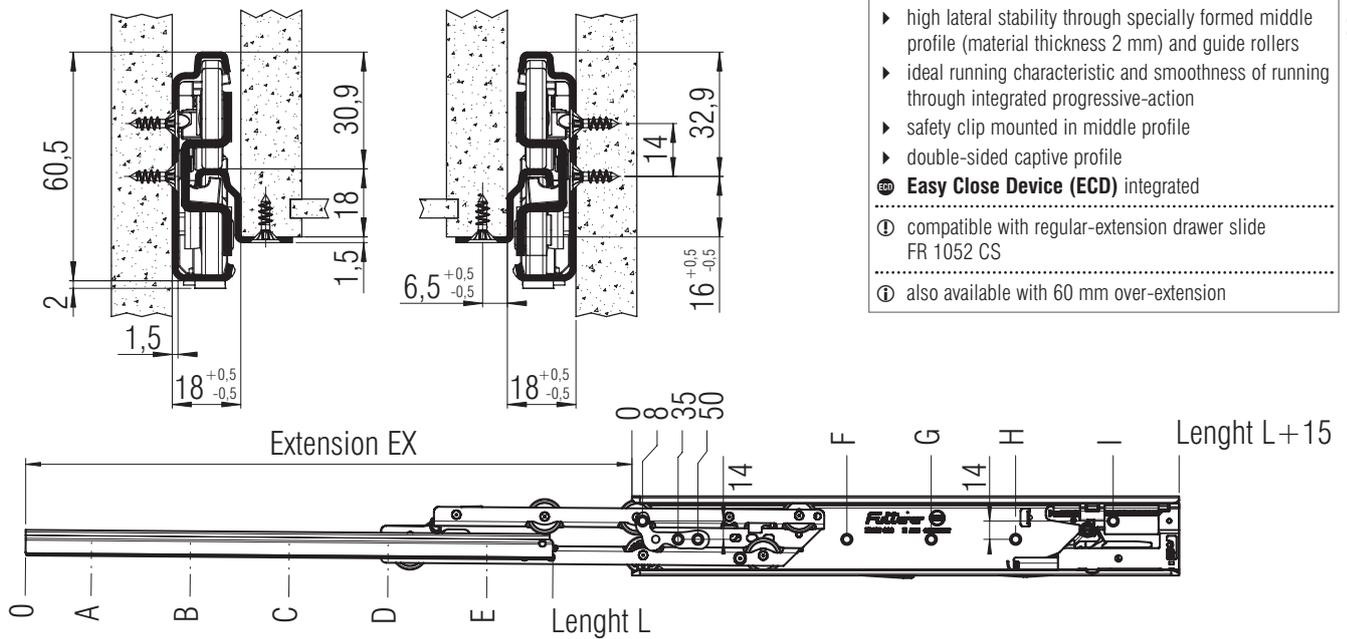

screw holes for 3,5 mm spax screws

L mm	EX full-ext.	EX over-ext.	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Weight per pair (kg)	Order No. full-ext.	Order No. over-ext.
335	320	395	28	156	316			163			300	*	*	*
350	335	410	28	156	316			163			315	*	▶ 8222	*
385	370	445	28	156	348			163			350	*	*	*
400	385	460	28	156	380			163			365	*	▶ 8224	*
435	420	495	28	156	316	412		163	323		400	*	*	*
450	435	510	28	156	316	412		163	355		415	*	▶ 8226	*
485	470	545	28	156	348	444		163	355		450	*	*	*
500	485	560	28	156	348	476		163	355		465	*	▶ 8228	*
535	520	595	28	156	348	508		163	355		500	*	*	*
550	535	610	28	156	348	508		163	355		515	*	▶ 8230	▶ 8250
585	570	645	28	156	348	540		195	355		550	*	*	*
600	585	660	28	156	348	572		195	355		565	*	▶ 8232	▶ 8254
635	620	695	28	156	348	604		163	355	547	600	*	*	*
650	635	710	28	156	348	604		163	355	547	615	*	▶ 8234	*
685	670	745	28	156	348	540	668	163	355	547	650	*	*	*
700	685	760	28	156	348	540	668	163	355	547	665	*	▶ 8236	*
735	720	795	28	156	348	572	700	163	355	547	700	*	*	*
750	735	810	28	156	348	572	732	163	355	547	715	*	*	*

Packing Unit: on request

▶ prompt delivery * on request



*DuPont (TM) Delrin®

FR 786 ECD

SLIDE TYPE:	Full-Extension Drawer Slide - Progressive-Action
MOUNTING:	Bottom Mount



WIDTH:	18 mm
LOAD CAPACITY:	dynamic up to 55 kg (full-ext.) dynamic up to 40 kg (over-ext.)



MATERIAL:	steel, bright galvanized or white powder coated
------------------	---

FEATURES:	solid delrin* rollers
------------------	-----------------------

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ cabinet and drawer profile with screw holes ▶ high lateral stability through specially formed middle profile and guide rollers ▶ ideal running characteristic and smoothness of running through integrated progressive-action ▶ safety clip mounted in middle profile ▶ double-sided captive profile ▶ self-closing ▶ soft stop
<ul style="list-style-type: none"> Ⓢ Easy Close Device (ECD) integrated
<ul style="list-style-type: none"> Ⓢ on request compatible regular-extension drawer slide is available Ⓢ on request available with 60 mm over-extension

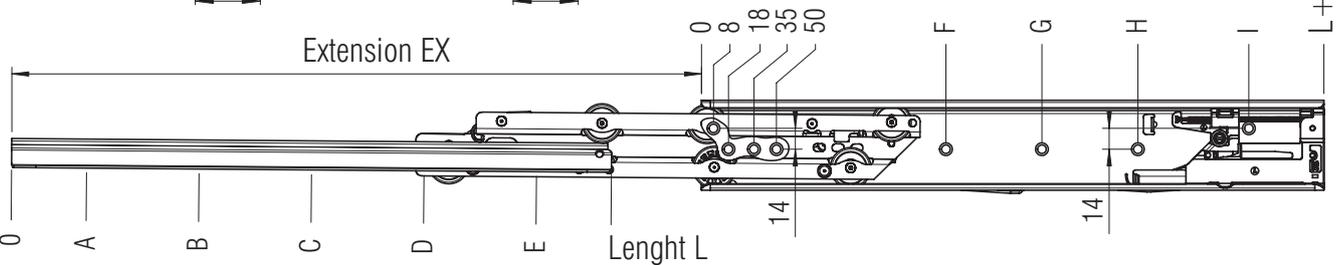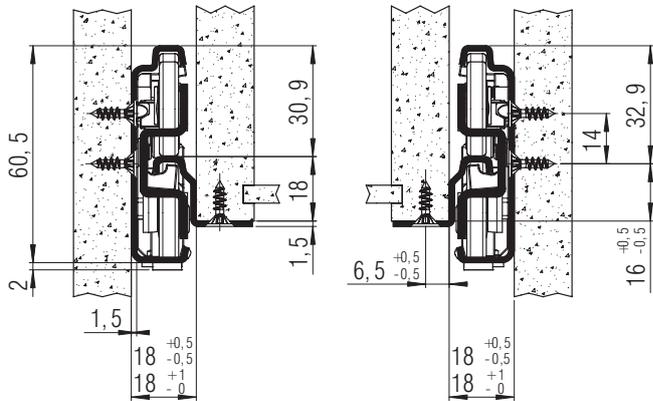

screw holes for 3,5 mm spax screws

L mm	EX full-ext.	EX over-ext.	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Weight per pair (kg)	Order No. full-ext. galvanized	Order No. full-ext. white
335	320	395	28	156	316			163			300	1,68	*	*
350	335	410	28	156	316			163			315	1,76	*	▶ 8201
385	370	445	28	156	348			163			350	1,94	*	*
400	385	460	28	156	380			163			365	2,02	*	▶ 8202
435	420	495	28	156	316	412		163	323		400	2,19	*	*
450	435	510	28	156	316	412		163	355		415	2,27	*	▶ 8203
485	470	545	28	156	348	444		163	355		450	2,45	*	*
500	485	560	28	156	348	476		163	355		465	2,53	*	▶ 8204
535	520	595	28	156	348	508		163	355		500	2,70	*	*
550	535	610	28	156	348	508		163	355		515	2,78	*	▶ 8205
585	570	645	28	156	348	540		195	355		550	2,96	*	*
600	585	660	28	156	348	572		195	355		565	3,04	*	▶ 8206
635	620	695	28	156	348	604		163	355	547	600	3,21	*	*
650	635	710	28	156	348	604		163	355	547	615	3,29	*	*
685	670	745	28	156	348	540	668	163	355	547	650	3,47	*	*
700	685	760	28	156	348	540	668	163	355	547	665	3,55	*	*
735	720	795	28	156	348	572	700	163	355	547	700	3,72	*	*
750	735	810	28	156	348	572	732	163	355	547	715	3,80	*	*

Packing Unit: 5 sets per box

▶ prompt delivery * minimum order quantity and lead time on request!

FR 790

SLIDE TYPE:	Full-Extension Drawer Slide - Progressive-Action
MOUNTING:	Side Mount

WIDTH:	18 mm
LOAD CAPACITY:	dynamic up to 60 kg (full-ext.) dynamic up to 45 kg (over-ext.)



MATERIAL:	steel, bright galvanized or white powder coated
------------------	---



FEATURES:	solid delrin* rollers
------------------	-----------------------

SPECIFICATIONS & NOTES:

- ▶ cabinet and drawer profile with screw holes
- ▶ high lateral stability through specially formed middle profile and guide rollers
- ▶ ideal running characteristic and smoothness of running through integrated progressive-action
- ▶ safety clip mounted in middle profile
- ▶ double-sided captive profile
- ▶ self-closing
- ▶ soft stop

- ① on request compatible regular-extension Drawer Slide is available
- ② on request available with 60 mm over-extension

*DuPont (TM) Delrin®

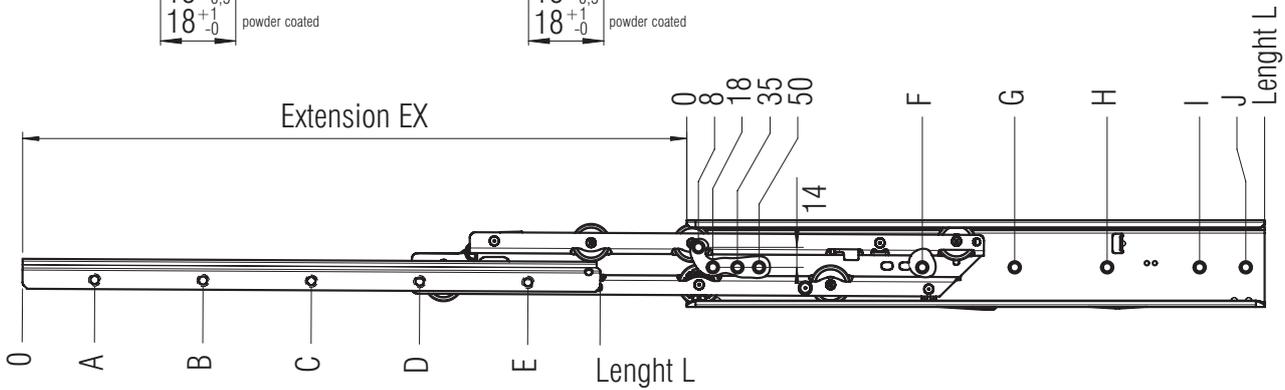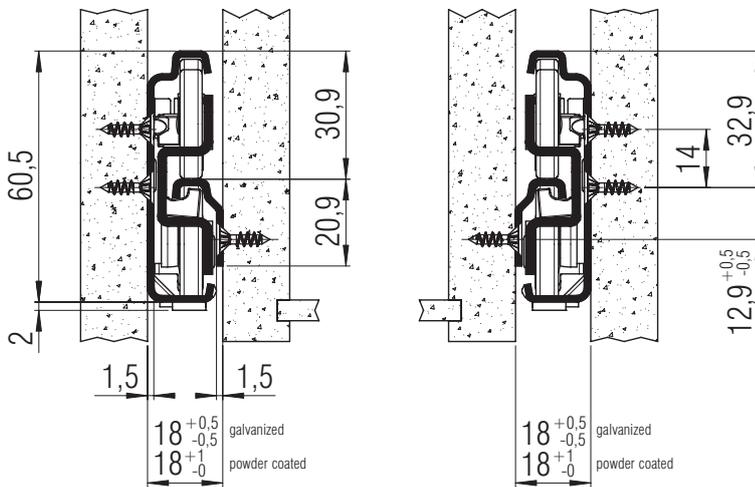

screw holes for 3,5 mm spax screws

L	EX	EX	A	B	C	D	E	F	G	H	I	J	Weight	Order No.	Order No.
mm	full-ext.	over-ext.	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	per pair (kg)	full-ext. galvanized	full-ext. white
350	335	410	28	156	316			163	291	323			1,62	▶ 7960	▶ 7990
400	385	460	28	156	380			163	355	387			1,86	▶ 7961	▶ 7991
450	435	510	28	156	316	412		163	355	387			2,10	▶ 7962	▶ 7992
500	485	560	28	156	348	476		163	355	451	483		2,34	▶ 7963	▶ 7993
550	535	610	28	156	348	508		163	355	483	515		2,58	▶ 7964	▶ 7994
600	585	660	28	156	348	572		195	355	547	579		2,82	▶ 7965	▶ 7995
650	635	710	28	156	348	604		163	355	515	547		3,06	▶ 7966	▶ 7996
700	685	760	28	156	348	540	668	163	355	547	643	675	3,30	▶ 7967	▶ 7997
750	735	810	28	156	348	572	732	163	355	547	611	643	3,54	▶ 7968	▶ 7998

Packing Unit: 5 sets per box

▶ prompt delivery

Fulterer

FR 790 CS

SLIDE TYPE:	Progressive-Action Full-Extension Drawer Slide
MOUNTING:	Side Mount

WIDTH:	18 mm
LOAD CAPACITY:	dynamic up to 68 kg (full-ext.) dynamic up to 53 kg (over-ext.)






MATERIAL:	stainless steel
------------------	-----------------

FEATURES:	solid delrin* rollers
------------------	-----------------------

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ cabinet and drawer profile with screw holes ▶ high lateral stability through specially formed middle profile (material thickness 2 mm) and guide rollers ▶ ideal running characteristic and smoothness of running through integrated progressive-action ▶ safety clip mounted in middle profile ▶ double-sided captive profile ▶ self closing, soft stop
<ul style="list-style-type: none"> ① compatible with regular-extension drawer slide FR 1052 CS ① also available with 60 mm over-extension ① also available as heat resistant model (up to 110° C) – Load Capacity 50 kg (full ext.), 40 kg (over ext.)

*DuPont (TM) Delrin®

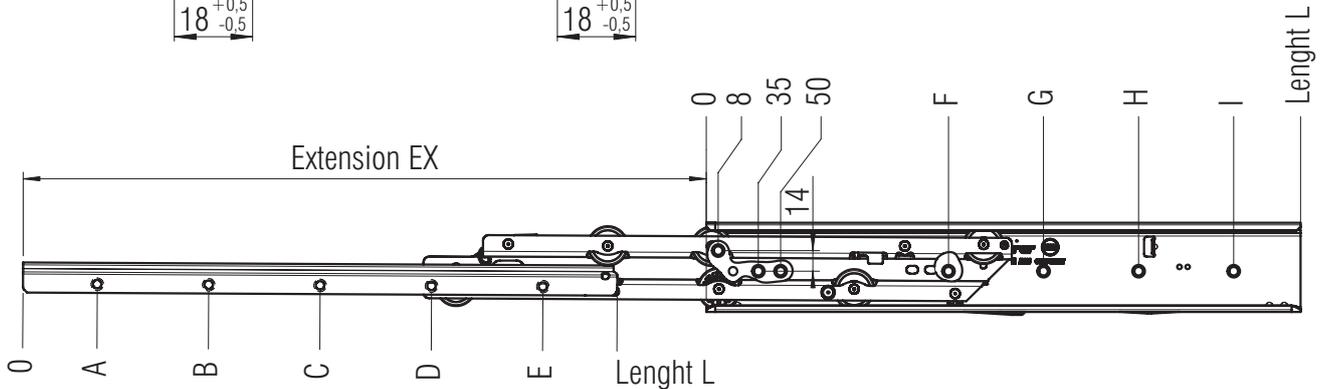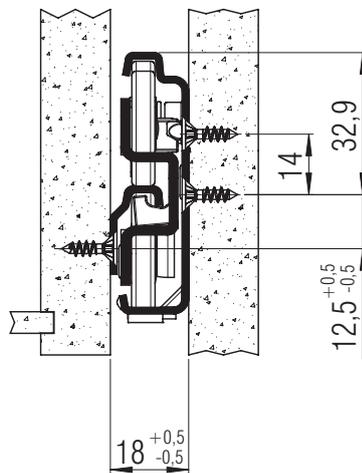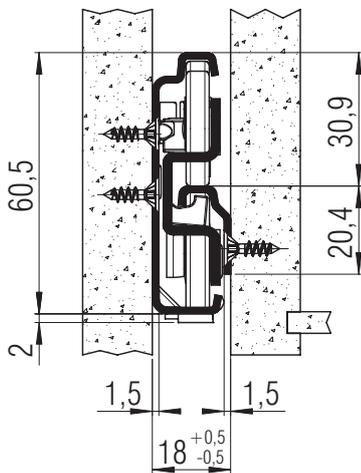

screw holes for 3,5 mm spax screws

L mm	EX full-ext.	EX over-ext.	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Weight per pair (kg)	Order No. full-ext.	Order No. over-ext.	Order No. heat resistant
350	335	410	28	156	316			163	291			1,71	▶ 7900	*	▶ 7970
400	385	460	28	156	380			163	355			1,95	▶ 7901	*	*
450	435	510	28	156	316	412		163	355			2,19	▶ 7902	*	▶ 7972
500	485	560	28	156	348	476		163	355	451		2,43	▶ 7903	*	▶ 7973
550	535	610	28	156	348	508		163	355	483		2,67	▶ 7904	▶ 7924	▶ 7974
600	585	660	28	156	348	572		195	355	547		2,91	▶ 7905	*	▶ 7975
650	635	710	28	156	348	604		163	355	547		3,15	▶ 7906	▶ 7926	▶ 7976
700	685	760	28	156	348	540	668	163	355	547	643	3,39	▶ 7907	*	*
750	735	810	28	156	348	572	732	163	355	547	643	*	*	*	*

Packing Unit: 5 units per box

▶ prompt delivery * on request

FR 790 CS-S

SLIDE TYPE:	Full-Extension Drawer Slide - Progressive-Action
MOUNTING:	Side Mount



WIDTH:	18 mm
LOAD CAPACITY:	dynamic up to 68 kg (full-ext.) dynamic up to 53 kg (over-ext.)



MATERIAL:	stainless steel
------------------	-----------------

FEATURES:	solid delrin* rollers
------------------	-----------------------

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ cabinet profile with bayonet mounting tabs ▶ drawer profile without screw holes ▶ high lateral stability through specially formed middle profile (material thickness 2 mm) and guide rollers ▶ ideal running characteristic and smoothness of running through integrated progressive-action ▶ safety clip mounted in middle profile ▶ double-sided captive profile ▶ self closing, soft stop <hr/> <ul style="list-style-type: none"> ① compatible with regular-extension drawer slide CS-S ① tool-less quick assembly of the cabinet profile ① standard grid rail (see drawing) <hr/> <ul style="list-style-type: none"> ① on request, also available as heat resistant model (up to 110° C) – load capacity 50 kg (full-ext.), 40 kg (over-ext.)

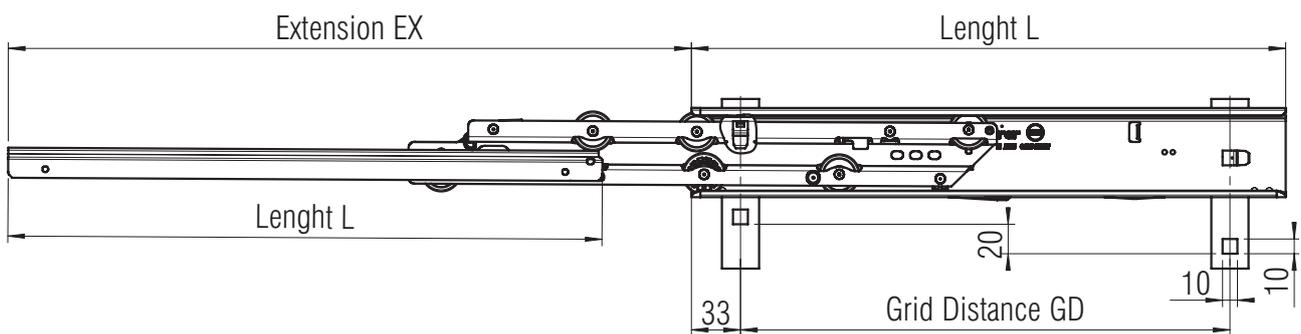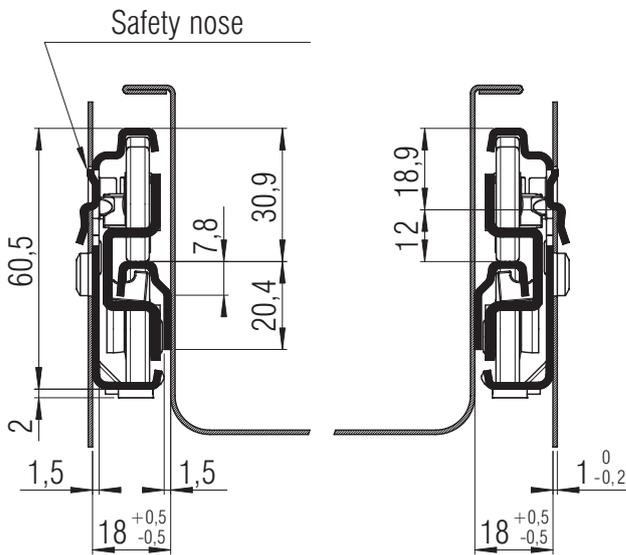

L mm	EX full-ext.	EX over-ext.	GD mm	Weight per pair (kg)	Order No. full-ext.	Order No. over-ext.
350	335	410	279,5	1,62	*	*
400	385	460	329,5	1,68	*	*
450	435	510	379,5	2,10	*	*
500	485	560	429,5	2,34	*	*
550	535	610	479,5	2,58	*	*
600	585	660	529,5	2,82	*	*
650	635	710	579,5	3,06	*	*
700	685	760	629,5	3,30	*	*
750	735	810	679,5	3,54	*	*

Packing Unit: **on request** * **on request**

FR 790 CS-SC

SLIDE TYPE:	Full-Extension Drawer Slide - Progressive-Action
MOUNTING:	Side Mount

WIDTH:	18 mm
LOAD CAPACITY:	dynamic up to 68 kg (full-ext.) dynamic up to 53 kg (over-ext.)





MATERIAL:	stainless steel
------------------	-----------------

FEATURES:	solid delrin* rollers
------------------	-----------------------

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ cabinet profile with bayonet mounting tabs ▶ drawer profile without screw holes ▶ high lateral stability through specially formed middle profile (material thickness 2 mm) and guide rollers ▶ ideal running characteristic and smoothness of running through integrated progressive-action ▶ safety clip mounted in middle profile ▶ double-sided captive profile ▶ self closing, soft stop <hr/> <ul style="list-style-type: none"> ① compatible with regular-extension drawer slide CS-S ① tool-less quick assembly of the cabinet profile ① standard grid rail (see drawing) <hr/> <ul style="list-style-type: none"> ① on request, also available as heat resistant model (up to 110° C) – load capacity 50 kg (full-ext.), 40 kg (over-ext.)

*DuPont (TM) Delrin®

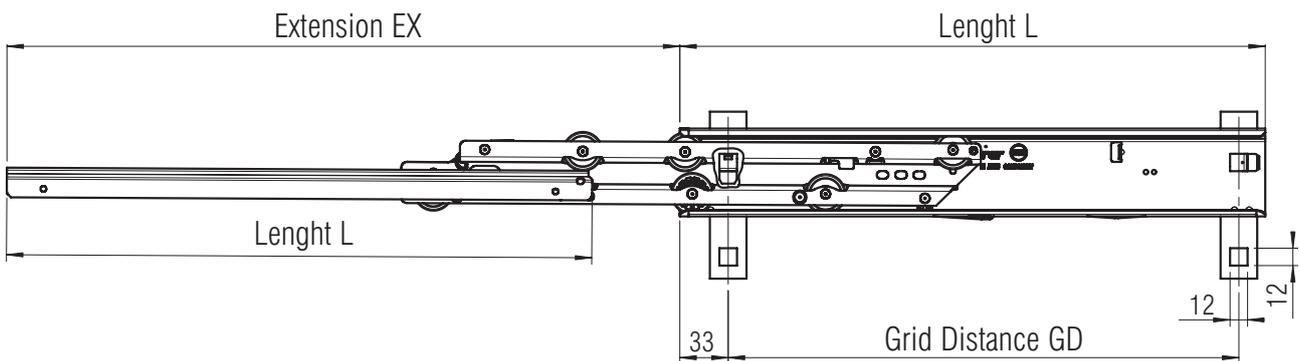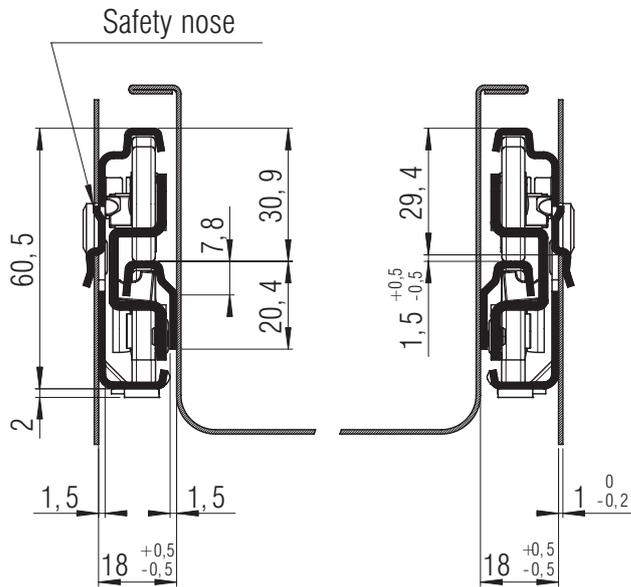

L mm	EX full-ext.	EX over-ext.	GD mm	Weight per pair (kg)	Order No. full-ext.	Order No. over-ext.
350	335	410	299	1,62	*	*
400	385	460	349	1,68	*	▶ 8021
450	435	510	399	2,10	*	*
500	485	560	449	2,34	*	▶ 8023
550	535	610	499	2,58	*	▶ 8024
600	585	660	549	2,82	*	▶ 8025
650	635	710	599	3,06	*	▶ 8026
700	685	760	649	3,30	*	▶ 8027
750	735	810	699	3,54	*	*

Packing Unit: 5 units per box

▶ prompt delivery * on request

FR 791

SLIDE TYPE:	Full-Extension Drawer Slide - Progressive-Action
MOUNTING:	Bottom Mount

WIDTH:	18 mm
LOAD CAPACITY:	dynamic up to 60 kg (full-ext.) dynamic up to 45 kg (over-ext.)





MATERIAL:	steel, bright galvanized or white powder coated
------------------	---

FEATURES:	solid delrin* rollers
------------------	-----------------------

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ cabinet and drawer profile with screw holes ▶ high lateral stability through specially formed middle profile and guide rollers ▶ ideal running characteristic and smoothness of running through integrated progressive-action ▶ safety clip mounted in middle profile ▶ double-sided captive profile ▶ self-closing ▶ soft stop
<ul style="list-style-type: none"> ① on request compatible regular-extension drawer slide is available ② on request available with 60 mm over-extension

*DuPont (TM) Delrin®

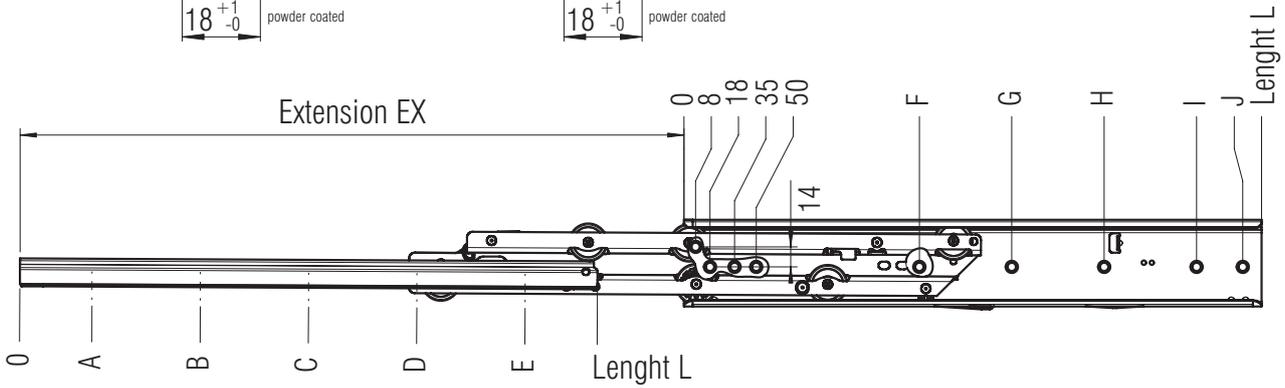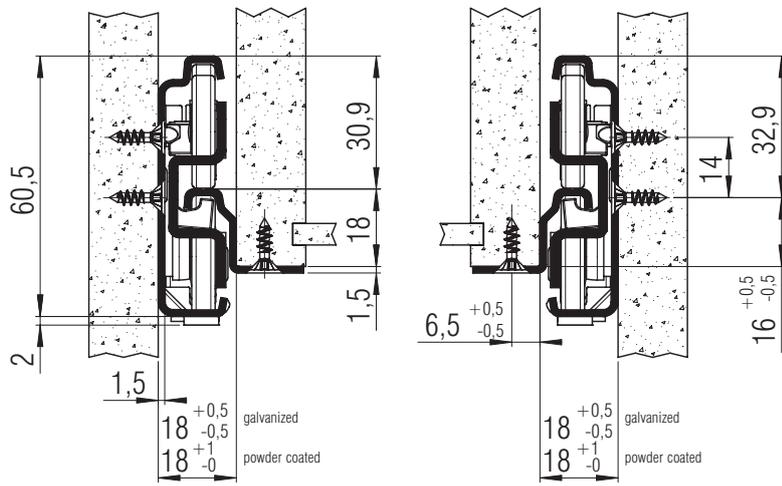

screw holes for 3,5 mm spax screws

L mm	EX full-ext.	EX over-ext.	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	J mm	Weight per pair (kg)	Order No. full-ext. galvanized	Order No. full-ext. white
350	335	410	28	156	316			163	291	323			1,73	▶ 7800	▶ 7820
400	385	460	28	156	380			163	355	387			1,99	▶ 7801	▶ 7821
450	435	510	28	156	316	412		163	355	387			2,24	▶ 7802	▶ 7822
500	485	560	28	156	348	476		163	355	451	483		2,50	▶ 7803	▶ 7823
550	535	610	28	156	348	508		163	355	483	515		2,75	▶ 7804	▶ 7824
600	585	660	28	156	348	572		195	355	547	579		3,00	▶ 7805	▶ 7825
650	635	710	28	156	348	604		163	355	515	547		3,26	▶ 7806	▶ 7826
700	685	760	28	156	348	540	668	163	355	547	643	675	3,52	▶ 7807	▶ 7827
750	735	810	28	156	348	572	732	163	355	547	611	643	3,77	▶ 7808	▶ 7828

Packing Unit: 5 sets per box

▶ prompt delivery



FR 791 CS

SLIDE TYPE:	Full-Extension Drawer Slide - Progressive-Action
MOUNTING:	Bottom Mount

WIDTH:	18 mm
LOAD CAPACITY:	dynamic up to 68 kg (full-ext.) dynamic up to 53 kg (over-ext.)





MATERIAL:	stainless steel
------------------	-----------------

FEATURES:	solid delrin* rollers
------------------	-----------------------

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ cabinet and drawer profile with screw holes ▶ high lateral stability through specially formed middle profile (material thickness 2 mm) and guide rollers ▶ ideal running characteristic and smoothness of running through integrated progressive-action ▶ safety clip mounted in middle profile ▶ double-sided captive profile ▶ self closing, soft stop
<ul style="list-style-type: none"> ① compatible with regular-extension drawer slide FR 1052 CS ① also available with 60 mm over-extension ① on request, also available as heat resistant model (up to 110° C) – load capacity 45 kg (full-ext.), 35 kg (over-ext.)

*DuPont (TM) Delrin®

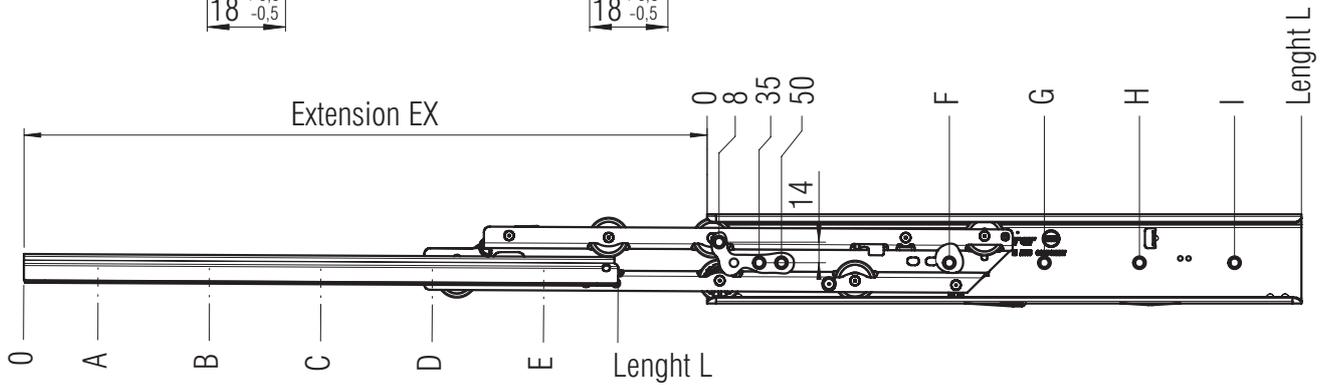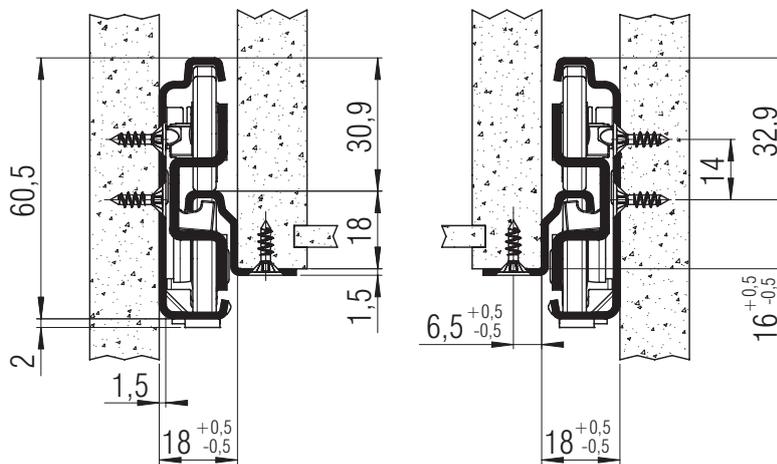

screw holes for 3,5 mm spax screws

L mm	EX full-ext.	EX over-ext.	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Weight per pair (kg)	Order No. full-ext.	Order No. over-ext.
350	335	410	28	156	316			163	291			*	*	*
400	385	460	28	156	380			163	355			2,06	▶ 7941	*
450	435	510	28	156	316	412		163	355			2,31	▶ 7942	*
500	485	560	28	156	348	476		163	355	451		2,56	▶ 7943	*
550	535	610	28	156	348	508		163	355	483		2,82	▶ 7944	▶ 81413
600	585	660	28	156	348	572		195	355	547		3,07	▶ 7945	*
650	635	710	28	156	348	604		163	355	547		3,33	▶ 7946	*
700	685	760	28	156	348	540	668	163	355	547	643	3,58	▶ 7947	*
750	735	810	28	156	348	572	732	163	355	547	643	*	*	*

Packing Unit: 5 sets per box

▶ prompt delivery * on request

FR 8001 ECD

PRODUCT TYPE: Easy Close Device
MOUNTING: Side Mount

WIDTH: min. 12.5 mm

ECD







MATERIAL: grey plastic, steel

SPECIFICATIONS:

- ▶ can be used in combination with any drawer slide with a minimum of 12.5 mm side clearance
- ▶ drawer is softly pulled shut from approx. 30 mm
- ▶ delivery set:
 - 2 pieces spring and dampening cylinder
 - 2 pieces follower
 - 1 piece mounting instructions
 - 1 piece mounting set

① also available in a version for use in refrigeration equipment at 5° to 40° C (FR 8003 ECD)

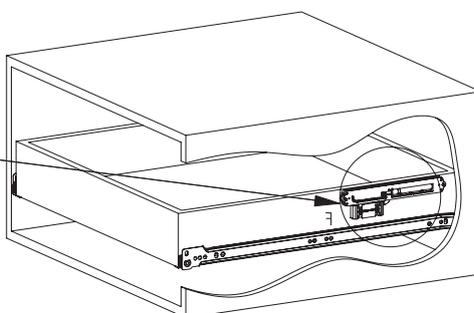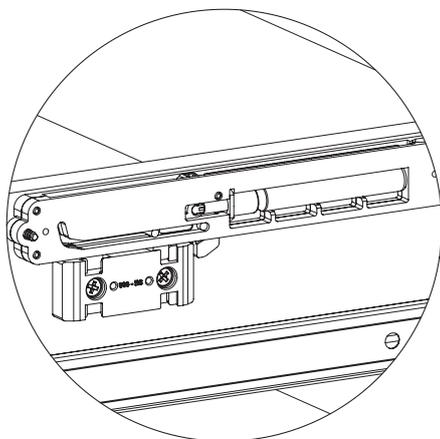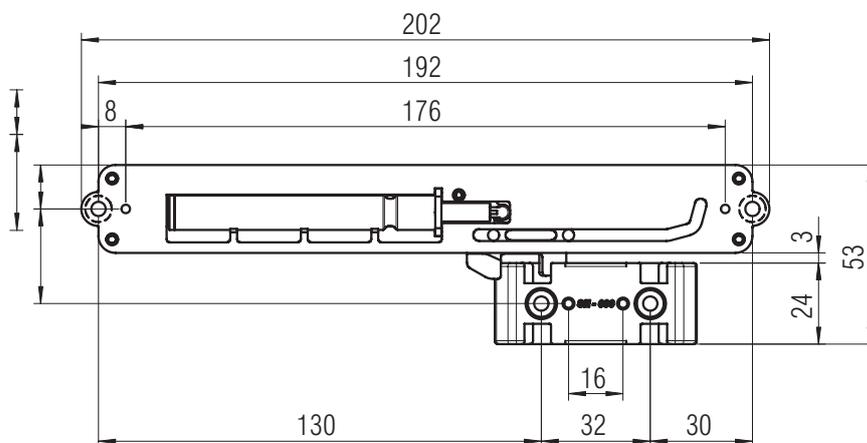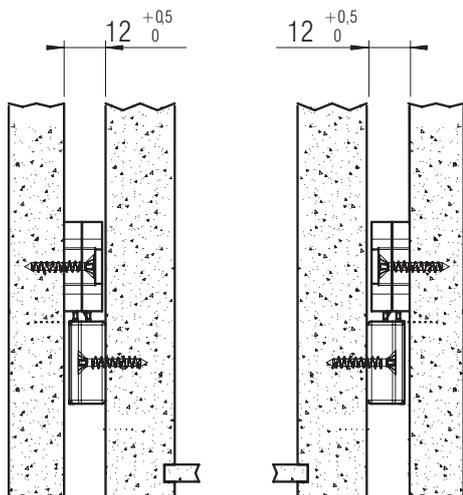

Mounting Diagram

Description	Order No.
FR 8001.ECD	grey
Packing Unit: 1 set per box	▶ 8001
	▶ prompt delivery

FR 8003 ECD

PRODUCT TYPE: Easy Close Device
MOUNTING: Side Mount

WIDTH: min. 12.5 mm

ECD






MATERIAL: grey plastic, steel

SPECIFICATIONS:

- ▶ can be used in combination with any drawer slide with a minimum of 12.5 mm side clearance
- ▶ drawer is softly pulled shut from approx. 30 mm
- ▶ delivery set:
 - 2 pieces spring and dampening cylinder
 - 2 pieces follower
 - 1 piece mounting instructions
 - 1 piece mounting set

① fit for use in refrigeration equipment at 5° to 40° C

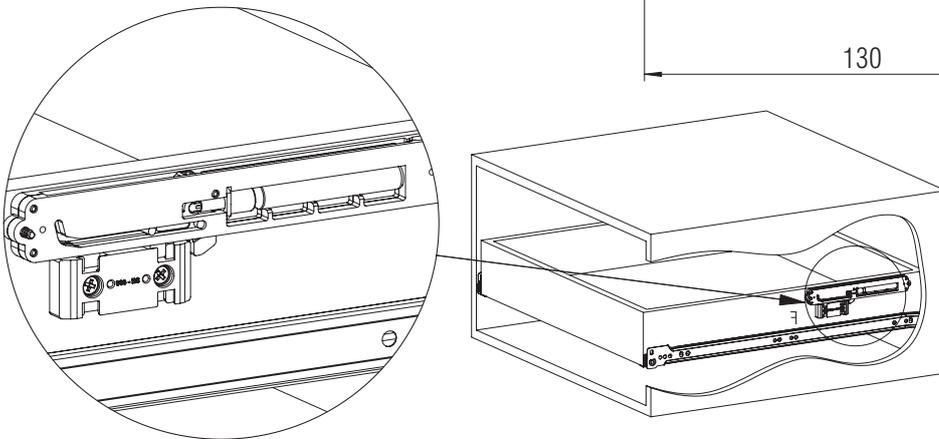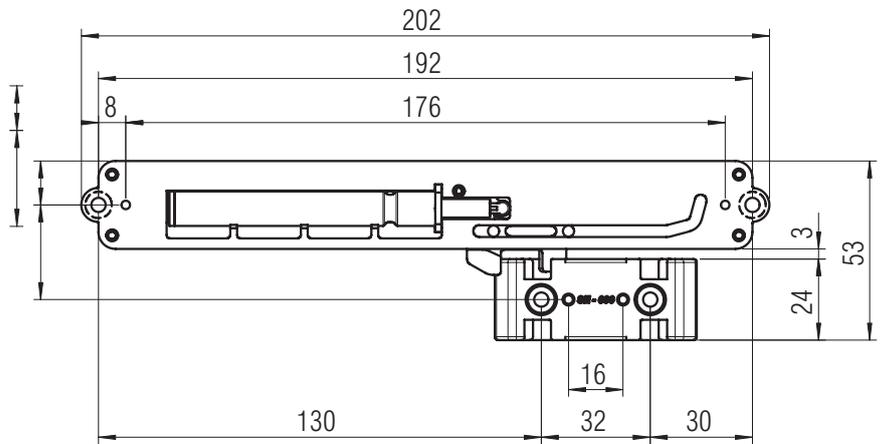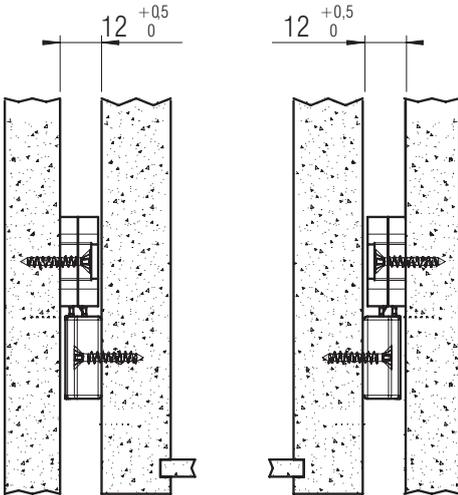

Mounting Diagram

Description	Order No.
FR 8003.ECD cold-resistant	grey
Packing Unit: 1 set per box	▶ 8003
	▶ prompt delivery

FR 860b


SLIDE TYPE:	Drawer Front Element without drawer
MOUNTING:	Attaches to Shelf

DIMENSIONS:	Width	17,5 mm
	Height	125 mm
MATERIAL:	steel, white powder coated	



SPECIFICATIONS:

- ▶ can be screw-mounted to any shelf
- ▶ three-way adjustable bracket
- ▶ drawer front element and attached drawer front can be removed as a unit from shelf
- ▶ adjustment options are incorporated into the adjustable bracket and operate independently of each other

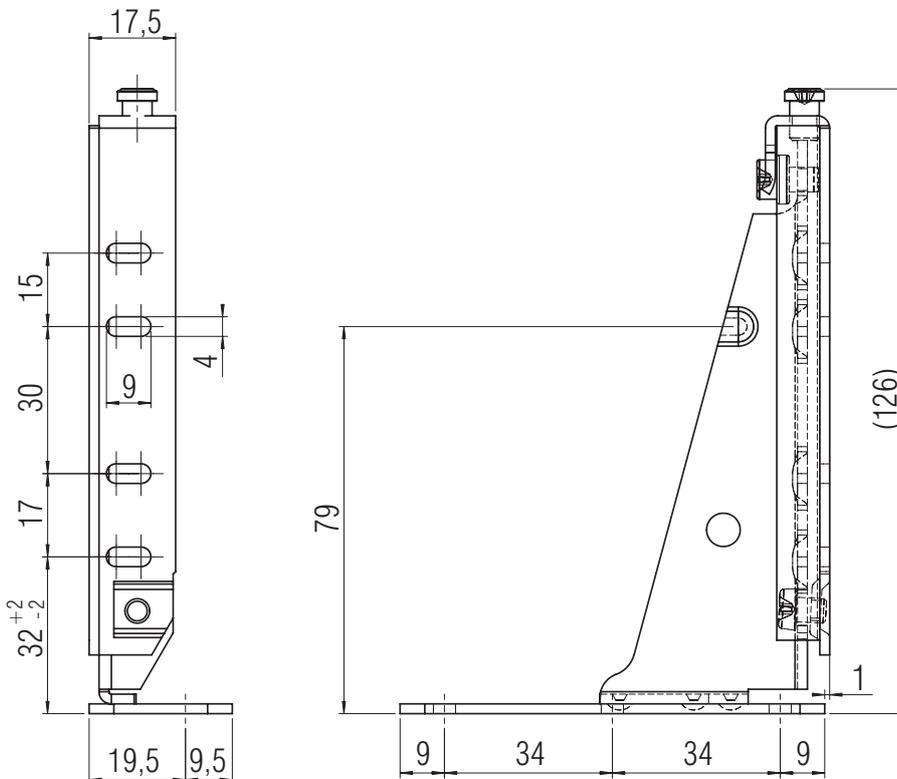

Drawer Front Element	Weight	Order No.
colour	per pair (kg)	
white	0,31	▶ 3108
Packing Unit: 50 sets per box		▶ prompt delivery

FR 9000

SLIDE TYPE:	Regular-Extension Aluminium Drawer Slide
MOUNTING:	Bottom and Side Mount



WIDTH:	56 mm
LOAD CAPACITY:	dynamic up to 200 kg



MATERIAL:	Aluminium
------------------	-----------

FEATURES:	nylon rollers and nylon-encased ball bearings
------------------	---

SPECIFICATIONS & NOTES:
<ul style="list-style-type: none"> ▶ modular sliding system comprised of aluminum components for a wide variety of applications ▶ 200 kg weight capacity, regular extension is approximately 70 % of profile's length ▶ the special interior shape of the profile compensates for installation inaccuracies in width, height and angular direction ▶ a recess for a M6 (DIN984) Allan head bolt with a centerline groove to accurately mark the position of the holes ▶ simple and secure fastening <p>① the system FR9000 can be obtained completely assembled or all parts separately to be fabricated by the user enabling to produce odd sizes with the individual components</p>

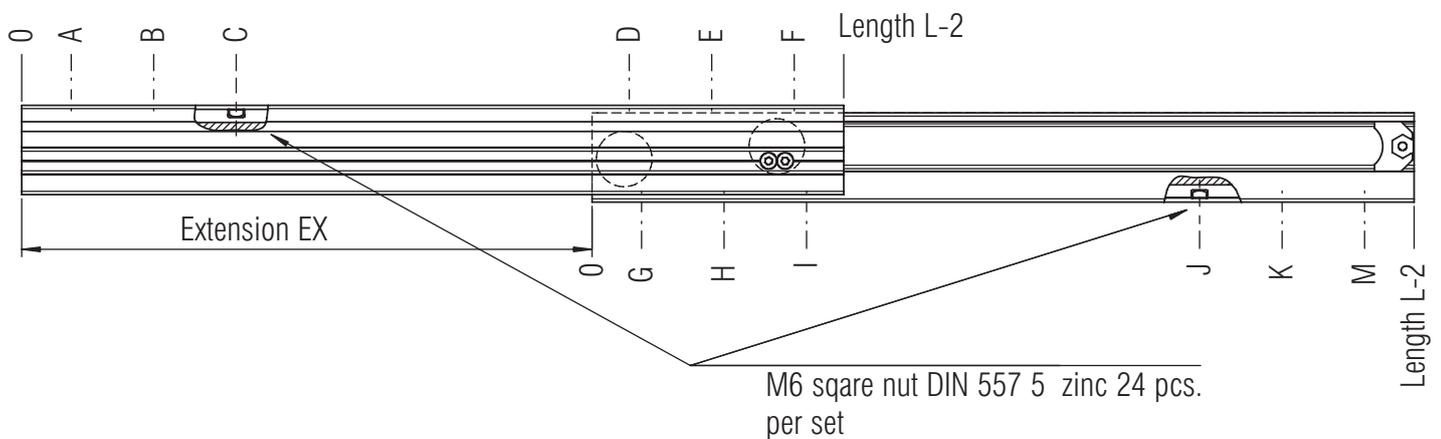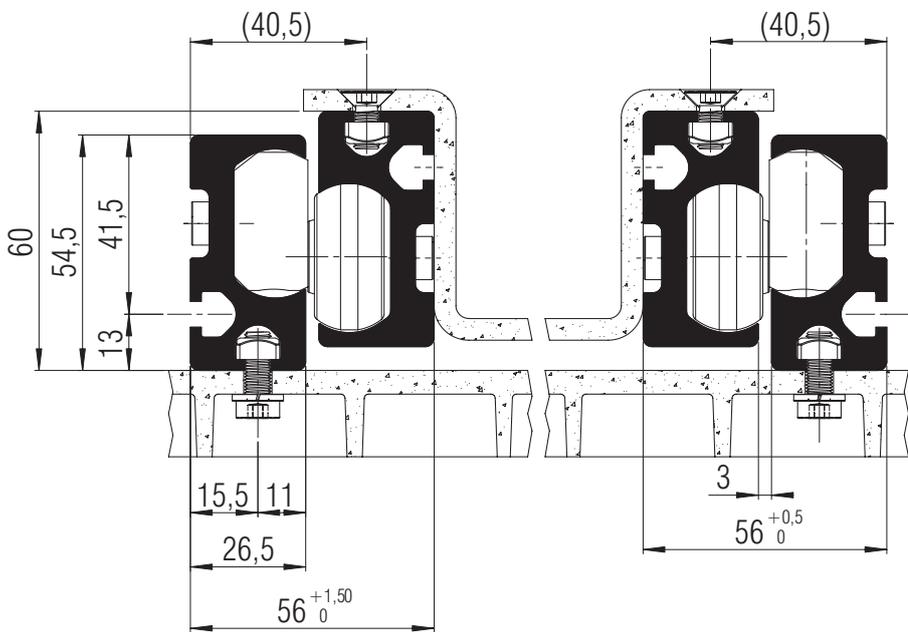


L mm	450	500	550	600	650	700	750	800	850	900	950	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500
EX	315	350	385	420	455	490	525	560	595	630	665	700	770	840	910	980	1050	1120	1190	1260	1330	1400	1470	1540	1610	1680	1750

FR 9000

SLIDE TYPE:	Regular-Extension Aluminium Drawer Slide
MOUNTING:	Bottom and Side Mount

WIDTH:	56 mm
LOAD CAPACITY:	dynamic up to 200 kg

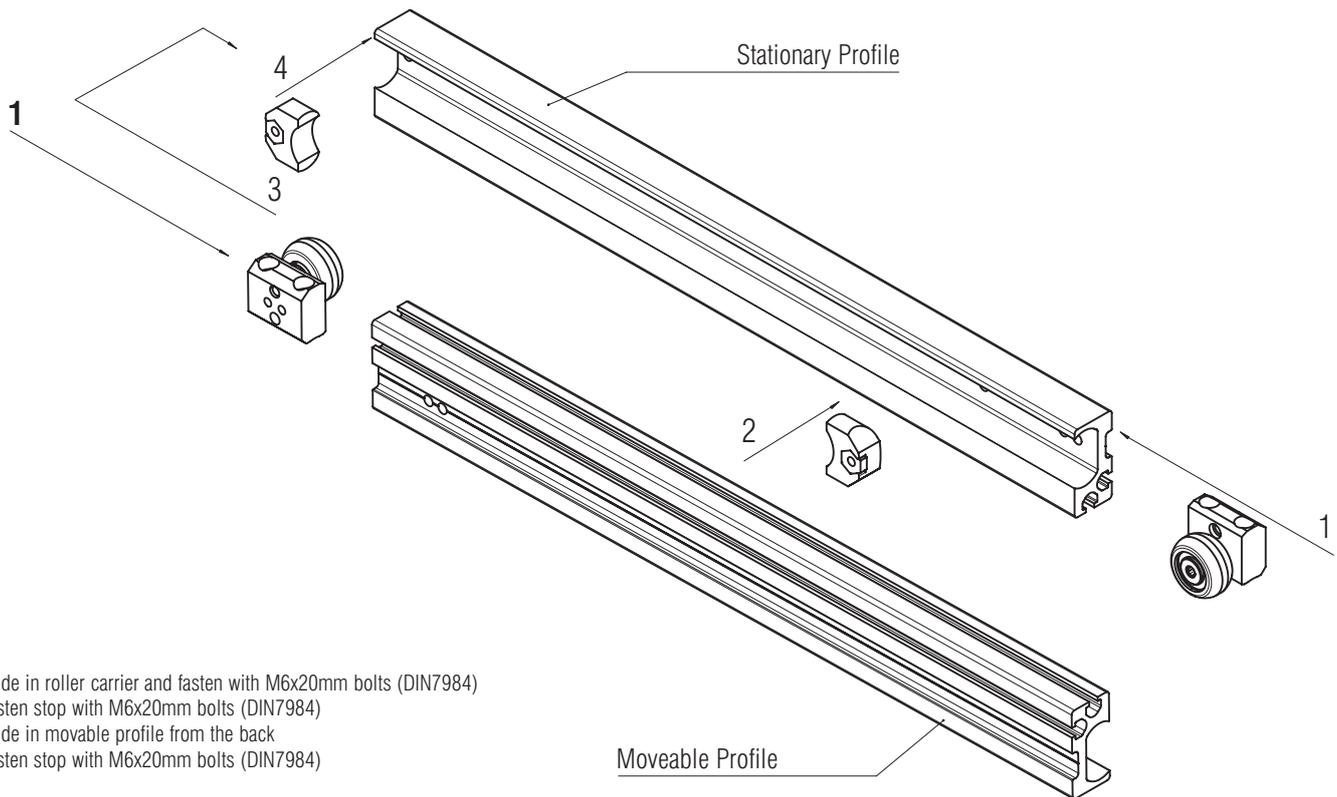

- 1.) slide in roller carrier and fasten with M6x20mm bolts (DIN7984)
- 2.) fasten stop with M6x20mm bolts (DIN7984)
- 3.) slide in movable profile from the back
- 4.) fasten stop with M6x20mm bolts (DIN7984)

EXAMPLE FR9000 REGULAR EXTENSION:

- ▶ 2 outer profiles with 4 stops and 2 roller carriers
- ▶ 2 inner profiles with 2 roller carriers
- ▶ all profiles have the same length, extension to one side

EXAMPLE FR9000 REGULAR EXTENSION:

- ▶ 2 outer profiles with 4 stops
- ▶ 2 inner profiles with 4 roller carriers
- ▶ different lengths of profiles, extension to both sides

EXAMPLE FR9000 TABLE EXTENSION:

- ▶ 2 outer profiles with 6 stops
- ▶ table top with roller carriers arranged in pairs


Individual components for Fabricators:		Order No.
Extruded Profile	Length 6140 mm	▶ 9201
rollers and stops/Regular Extension	2 pcs. solid rollers (tolerance compensating), 2 pcs. ballbearing rollers, 4 pcs. stops, 16 pcs. M6x20mm bolts (DIN7984), 24 pcs. M6 square nuts (DIN557), Packing: 1 box	▶ 9200
Minimum order quantity, pricing and lead time on request		▶ prompt delivery

Assembled Regular Extension Slide:	Length mm	EX mm	Weight	Order No.
FR 9000. 1600 mm	1600	1120	*	*
FR 9000. 1900 mm	1900	1330	*	*
FR 9000. 2300 mm	2300	1610	*	*
Minimum order quantity, pricing and lead time on request				* on request

FULFIX II



MOUNTING JIG: suited for drawer slides
FR 2021, FR 2022,
FR 2026 and FR 6500

MATERIAL: grey plastic, steel

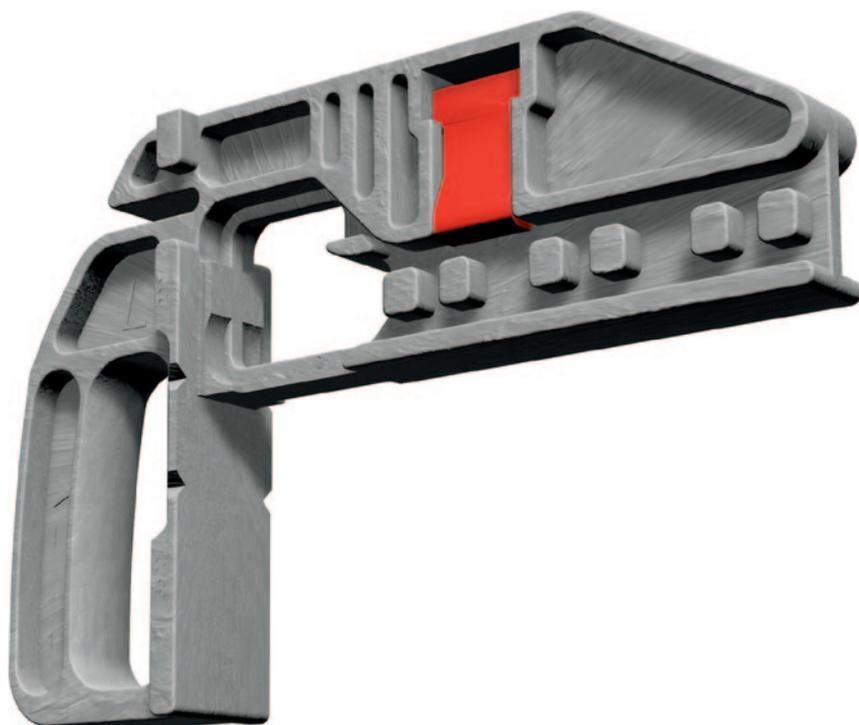

SPECIFICATIONS:

- ▶ suited for the cabinet profiles of FR 2021, FR 2022, FR 2026 and FR 6500
- ▶ clamping device assures a perpendicular and square fit onto the cabinet side
- ▶ for overlay or insert drawer fronts (19 mm setback)

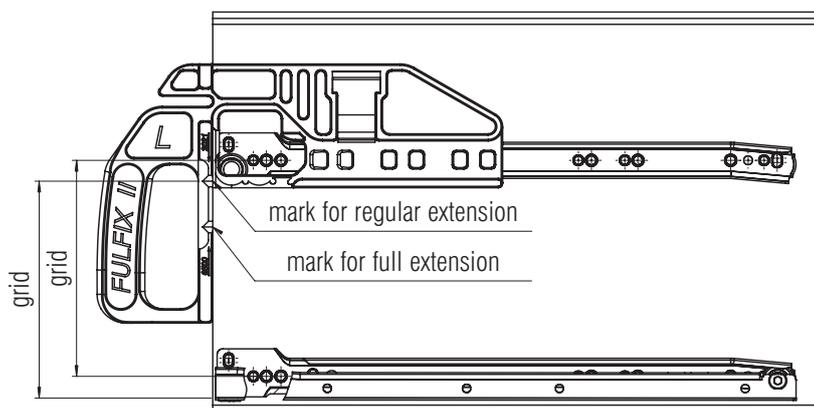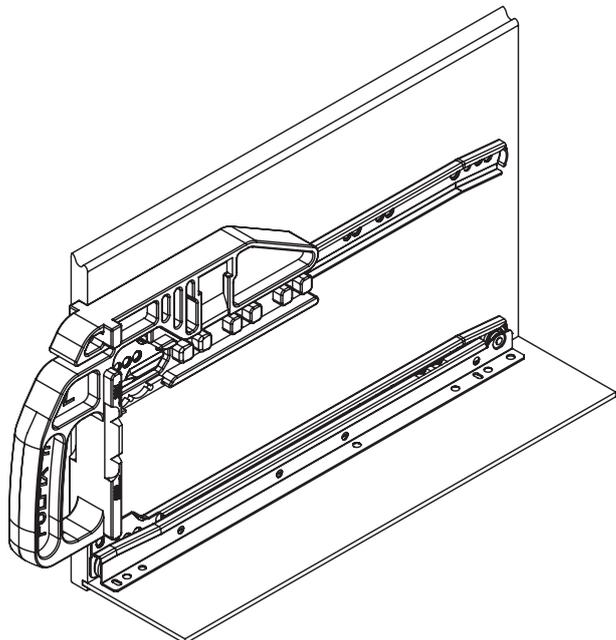

FULFIX II	Weight	Order No.
Colour		
grey	0,34	▶ 3000
Packing Unit: 1 piece		▶ prompt delivery


Fulterer

CARAT CCS 1/3

TYPE:	Container Set with easy close device ECD
WIDTH:	392 mm

RACK UNIT:	1 RU = 64 mm
HOLE DRILLING PATTERN:	32 mm
LOAD:	I. 10 kg II. 18 kg III. 35 kg

ECD





SET CONSISTING OF:

- ▶ **I. Drawer for pencil tray 1 RU**
Metal sliding frame MS 904 with mounted ECD
 - ▶ **II. Drawer with single extension slide 2,5 RU**
Single extension slide MR 145 with mounted ECD and metal drawer CARAT SE
 - ▶ **III. Drawer with progressive action slide 5 RU**
Progressive action slide MR 715 with mounted ECD and metal drawer CARAT SE,
Hanging file frame and front panel brace are enclosed
-
- ▶ Locking system surface mounted right side
 - ▶ Lock with 2 keys
 - ▶ Fitting template with mounting instructions
 - ▶ Set with screws
-
- ① Slides mounted to the pencil tray and drawer, packed as a unit
 - ① Optional: accessories in plastic and metal for the organization of drawers

LOCKING SYSTEM: surface mounted

MATERIAL: Hanging file frame: plastic, Drawer: metal

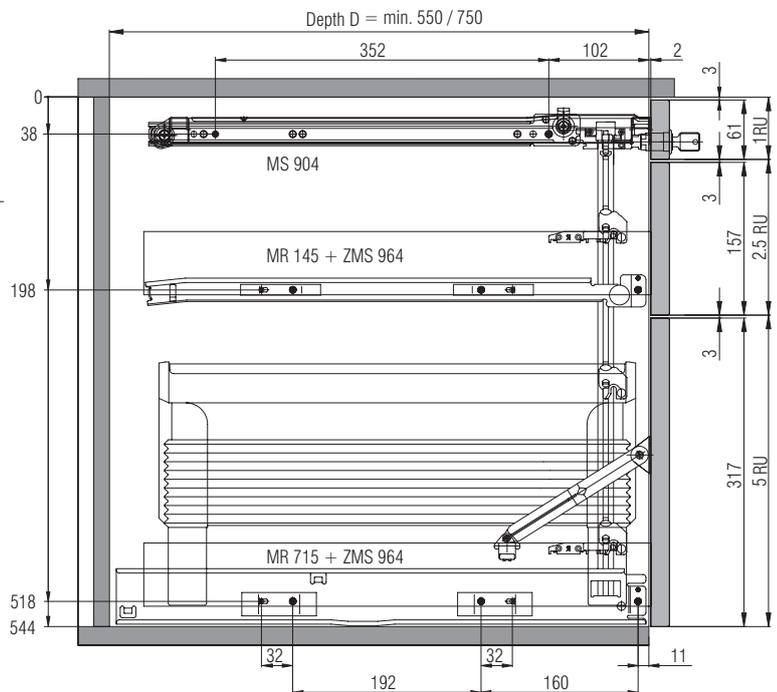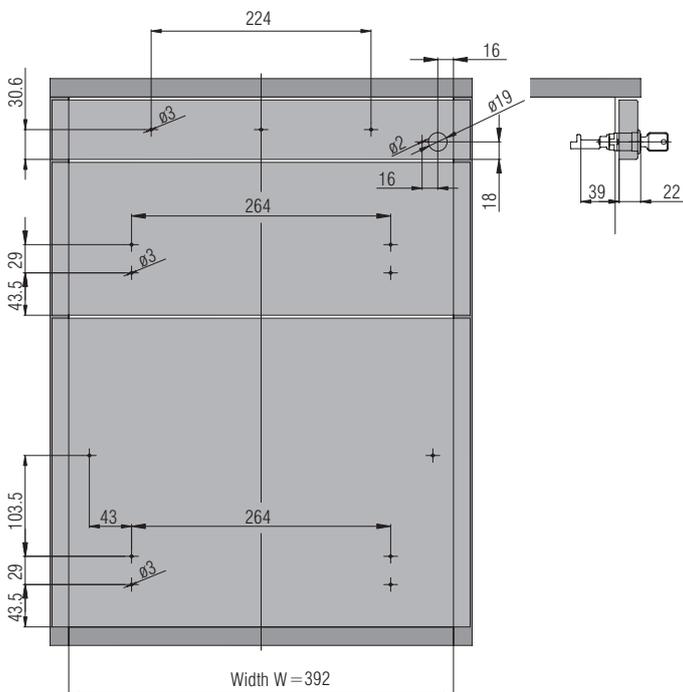

The manufacturer reserves the right to change the specification without notice. Weight in kg per set, average weight, with packing

Typ	Depth D mm	Width W mm	Weight kg	Order No. grey RAL 9006	Order No. black RAL 9005
Set CCS 1 1-2,5-5	550	392	13.61	▶ 0104220.25	▶ 0104220.61
Set CCS 3 1-2,5-5	750	392	17.55	▶ 0104222.25	▶ 0104222.61
Packing Unit: 1 set per box					▶ prompt delivery


MERZROLLER®

CARAT CCS 10/12

TYPE:	Container Set with easy close device ECD
WIDTH:	392 mm

RACK UNIT:	1 RU = 64 mm
HOLE DRILLING PATTERN:	32 mm
LOAD:	I. 10 kg II.-IV. 35 kg

ECD






SET CONSISTING OF:

- ▶ **I. Drawer for pencil tray 1 RU**
Metal sliding frame MS 904 with mounted ECD
 - ▶ **II. – IV. Drawer with progressive action slide 2,5 RU**
Progressive action slide MR 715 with mounted ECD and metal drawer CARAT SE
-
- ▶ Locking system surface mounted right side
 - ▶ Lock with 2 keys
 - ▶ Fitting template with mounting instructions
 - ▶ Set with screws
-
- ① Slides mounted to the pencil tray and drawer, packed as a unit
 - ① Optional: accessories in plastic and metal for the organization of drawers

LOCKING SYSTEM: surface mounted

MATERIAL: Drawer: metal

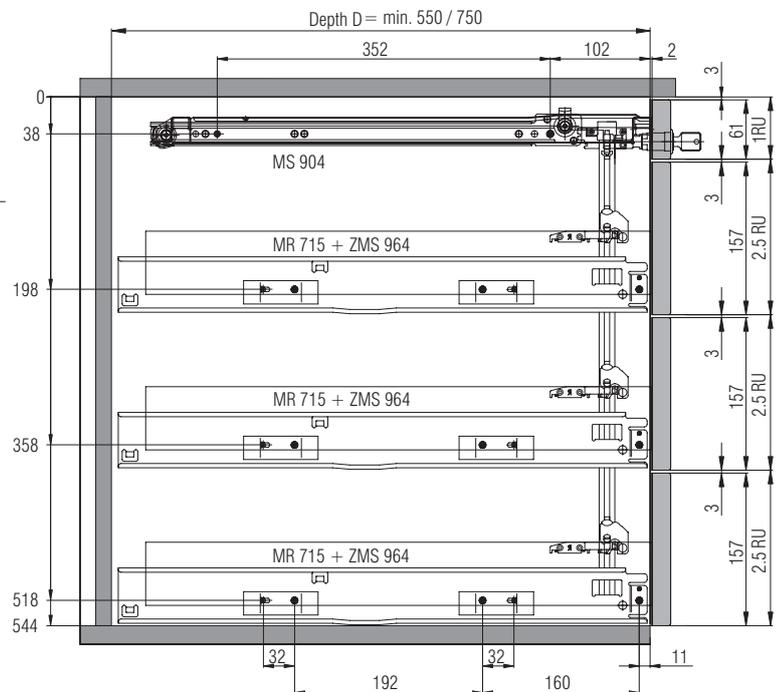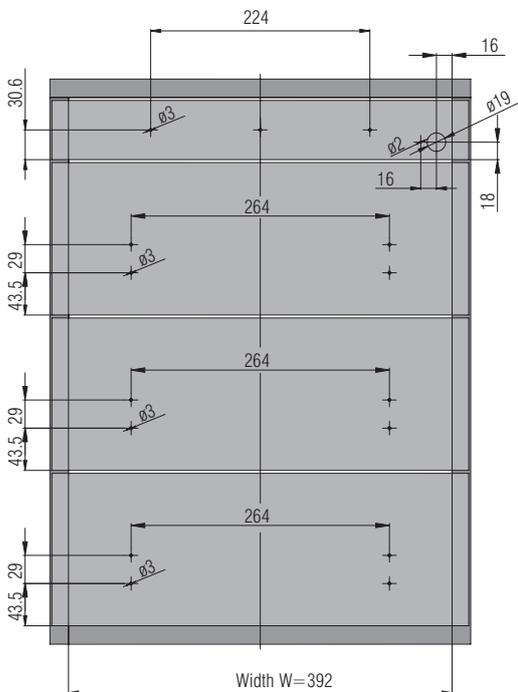

The manufacturer reserves the right to change the specification without notice. Weight in kg per set, average weight, with packing


Typ	Depth D mm	Width W mm	Weight kg	Order No. grey RAL 9006	Order No. black RAL 9005
Set CCS 10 1-2,5-2,5-2,5	550	392	19.71	▶ 0104225.25	▶ 0104225.61
Set CCS 12 1-2,5-2,5-2,5	750	392	25.48	▶ 0104227.25	▶ 0104227.61
Packing Unit: 1 set per box					▶ prompt delivery

CARAT CCS 2/4

TYPE:	Container Set with easy close device ECD
WIDTH:	392 mm

RACK UNIT:	1 RU = 64 mm
HOLE DRILLING PATTERN:	32 mm
LOAD:	I. 10 kg II.-IV. 18 kg

ECD





SET CONSISTING OF:

- ▶ **I. Drawer for pencil tray 1 RU**
Metal sliding frame MS 904 with mounted ECD
 - ▶ **II. – IV. Drawer with single extension slide 2,5 RU**
Single extension slide MR 145 with mounted ECD and metal drawer CARAT SE
-
- ▶ Locking system surface mounted right side
 - ▶ Lock with 2 keys
 - ▶ Fitting template with mounting instructions
 - ▶ Set with screws
-
- ① Slides mounted to the pencil tray and drawer, packed as a unit
 - ① Optional: accessories in plastic and metal for the organization of drawers

LOCKING SYSTEM: surface mounted

MATERIAL: Drawer: metal

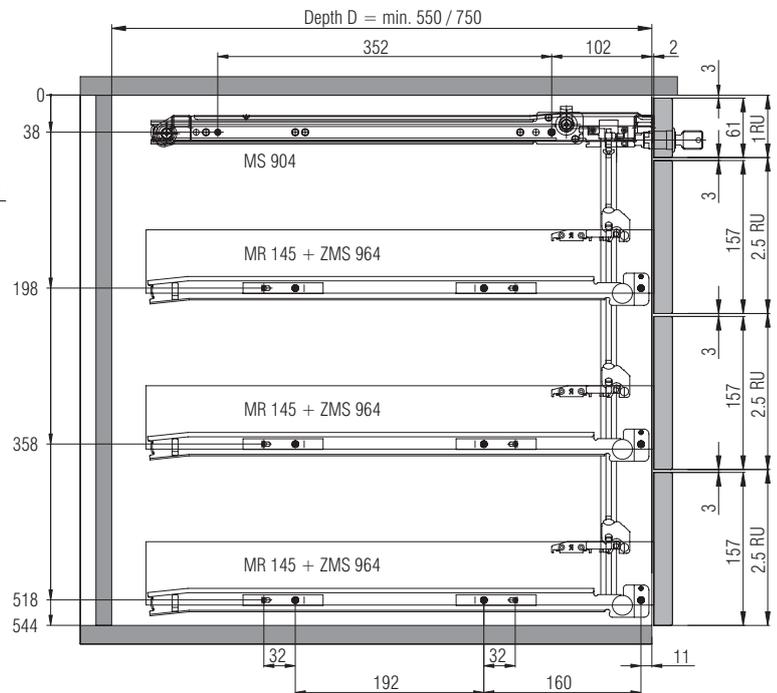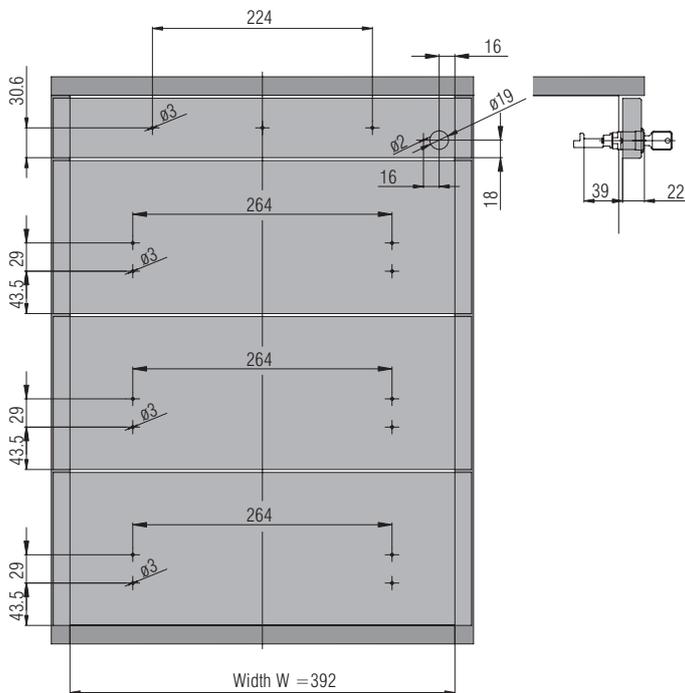

The manufacturer reserves the right to change the specification without notice. Weight in kg per set, average weight, with packing

Typ	Depth D mm	Width W mm	Weight kg	Order No. grey RAL 9006	Order No. black RAL 9005
Set CCS 2 1-2,5-2,5-2,5	550	392	13.65	▶ 0104221.25	▶ 0104221.61
Set CCS 4 1-2,5-2,5-2,5	750	392	17.38	▶ 0104223.25	▶ 0104223.61
Packing Unit: 1 set per box					▶ prompt delivery

